


Multi-Tap Magnetic Low Voltage Dimmable Drivers



Alloy LED's Magnetic Low Voltage Drivers are offered in multi-tap models designed to meet Class 2 requirements. By splitting the total wattage of the transformer into smaller circuits, multi-tap drivers can integrate into larger installations while still meeting Class 2 requirements. These drivers are already derated, which means they can be loaded to maximum wattage capacity.

Features

- Class 2
- Dimmable with MLV TRIAC dimmers
- Auto-reset circuit breakers
- Commercial and residential use
- Flicker-free
- Nema 3R enclosure
- 2 knock-outs

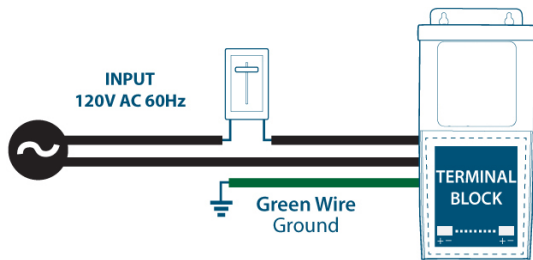

Item #		AL-98-02-12300	AL-98-02-24192
Input	Input Voltage	120V AC	120V AC
	Input Current Full Load	2.86A	2.2A
Output	Output Voltage	12V DC	24V DC
	Max. Load	60W per port x 5	96W per port x 2
	Min. Load	8W (dimmer) / none (on/off switch)	
	Output Voltage Full Load	11.3V DC	22.1V DC
	Max. Output Current Full Load	5.9A on each port	4.31A on each port
	Open Circuit Output Voltage	12.8V DC	24.5V DC
	Efficiency (Avg.)	78.8%	84.3%
	Power Factor	0.93	0.93
	Environment	Coil Former	Double Section Bobbin
Thermal Class		B130°C / 266°F	
Safety	Circuit Breaker	Primary and Secondary Auto Reset	
	Housing	Nema 3R	
	Certifications	ETL Listed, Certified to CSA standard	
Other	Leads Primary	PVC 600V #20	
	Leads Secondary	PVC 300V #14	
	Dimensions	11.33 x 4.73 x 4.26 in.	
	Weight	140 oz.	
	Warranty	5 years	