


## PrimaLine® 6.6 Gen 2 LED Tape Light

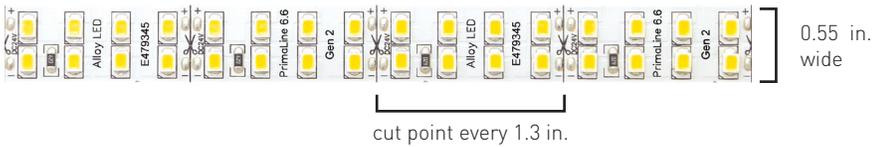

The PrimaLine Gen 2 family represents the next generation of LED lighting. Using the new, high-efficiency 2835 diode package, PrimaLine 6.6 Gen 2 offers super high output light at up to 774 lumens per foot, making it ideal for primary and large application accent lighting. PrimaLine 6.6 has a narrow form factor and its two rows of diodes makes installation quick and simple. Its evenly spaced dense diode placement minimizes hotspots to provide a smooth, even line of light.

<b>Stocked Color Temps (Kelvin)*</b>	2700K, 3000K, 4200K, 5000K*
<b>Power Consumption per ft.</b>	7.5 Watts/313mA
<b>Input Voltage</b>	24V DC
<b>LED Chips per foot</b>	72
<b>LED Chip Spacing</b>	0.33 inches
<b>Tape Height</b>	0.1 inches
<b>Beam Angle</b>	120°
<b>Field Cuttable (UL 2108)</b>	Every 1.3 inches
<b>Max Run Length</b>	20 ft.
<b>Dimmable</b>	Yes

\* In addition to stocked colors, a wide variety of kelvin temperatures is also available by special order. Please call or email to order.

- Next generation 2835 chips provide efficient lighting
- Up to 118 lumens per watt
- Two rows of powerful diodes for ultra high output primary source lighting
- Industry-leading 95+ CRI (Color Rendering Index)
- High R9 and R13 values for superb rendering of warm tones

<b>LED Chip Type</b>	2835 SMD
<b>Mounting</b>	3M™ Self-Adhesive Tape (non-porous)
<b>Operating Temp.</b>	-13° F to 140° F
<b>Ambient Temp.</b>	-40° F to 186° F
<b>Location</b>	Indoor, Dry
<b>Spool Lengths</b>	8 ft. *, 20 ft. **
<b>Certifications</b>	UL 2108 Listed, RoHS
<b>Warranty</b>	6 Year Limited

\*Each 8 ft. spool comes with 8 ft. lead wires at one end and an 8 ft. wire with female DC plug at the other. Wire is 20 AWG.

\*\*Each 20 ft. spool comes with 3 ft. lead wires at one end and a 3 ft. wire with female DC plug at the other. Wire is 20 AWG.

8 ft. spool Item #	20 ft. spool Item #	Voltage	Kelvin temp. (CCT)	CRI	R9 Values	R13 Values	Lumens / foot
AL-01-18-2401	AL-01-18-2411	24V DC	2700K	95+	90	94	648
AL-01-18-2402	AL-01-18-2412	24V DC	3000K	95+	90	94	698
AL-01-18-2403	AL-01-18-2413	24V DC	4200K	95+	90	94	698
AL-01-18-2404	AL-01-18-2414	24V DC	5000K	90+	55	90	774



field cuttable

## Accessories (sold separately)

### Tape Light Connectors\*



Item #	Description	Length	Item #	Description	Length
AL-01-18-9901	Tape-to-Tape Connector	n/a	AL-01-18-9917	Tape-to-Tape Flexible Extension	36 in.
AL-01-18-9902	Tape Light Splice Connector	6 in.	AL-01-18-9922	Tape Light DC Plug Connector	6 in.
AL-01-18-9907	Tape Light Splice Connector	36 in.	AL-01-18-9927	Tape Light DC Plug Connector	36 in.
AL-01-18-9910	Tape Light Splice Connector	8 ft.	AL-01-18-9947	In-Wall Tape Light Splice Connector	36 in.
AL-01-18-9911	Tape-to-Tape Flexible Extension	3 in.	AL-01-18-9950	In-Wall Tape Light Splice Connector	8 ft.
AL-01-18-9912	Tape-to-Tape Flexible Extension	6 in.			

\*All connector wire is 20 AWG

### Popular Continua™ Aluminum Channel Pairings






Surfa 2X  
surface-mount  
wide, corner-mount  
hotspot-free



Surfa 6  
surface-mount  
wide, low profile  
hotspot-free



Suspan 1  
suspended  
hotspot-free

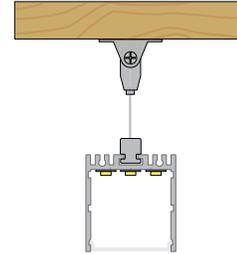

Click the square to see the Tape Light and Channel Compatibility Guide for a complete list of compatible channels.



Click the square to see the Continua Channel Hotspot Chart for hotspot ratings for channel models.

### Wire and Tape Light Management



Wire Harness  
Holds wire in place securely.  
L = 0.95 / W = 0.3 / H = 0.22 in.  
(AL-01-99-9901)



Tape Harness  
Provides extra security for tape  
light, especially at the ends of a run.  
L = 0.87 / W = 0.2 / H = 0.125 in.  
(AL-01-99-9900)

## Compatible Power Supplies (sold separately)

### Alloy LED Primavolt® Dimmable Power Supplies w/ETL Listed Junction Box



dry location model



wet location model



Smooth dimming using forward-phase ELV, MLV, and TRIAC dimmers.

Item #	Output	Wattage	Min. Load	Wet Loc.	Class 2
AL-98-03-24024-NM	24V DC	24W	none	N	Y
AL-98-03-24048-NM	24V DC	48W	none	N	Y
AL-98-03-24060-NM	24V DC	60W	none	N	Y
AL-98-03-24080-NM	24V DC	80W	none	Y	Y
AL-98-03-24096-NM	24V DC	96W	none	Y	Y
AL-98-03-24150-NM	24V DC	150W	none	Y	N
AL-98-03-24200-NM	24V DC	200W	none	Y	N

### Lutron® Dimming Accessories

By participating in Lutron's 2017 OEM Advantage program, Alloy LED is able to offer a range of the highest quality low voltage power supplies and selected controls on the market.



Hi-lume Premier  
0.1% EcoSystem /  
3-wire LED Driver  
(96W 24VDC)



Hi-lume 1% LED  
Driver 40W  
- EcoSystem / 3-wire  
control  
- 2-wire 120V forward  
phase control



Lutron Vive PowPak RF Module  
- RF module for EcoSystem LED  
driver control  
- Use with the Lutron EcoSystem  
drivers shown to "Vive-enable"  
Alloy LED products

### Lutron® Hi-lume LED Drivers

Item #	Output	Wattage	Min. Load	Class 2
AL-98-07-12040	12V DC	40W	n/a	Y
AL-98-07-12040-3WIRE	12V DC	40W	n/a	Y
AL-98-07-24040	24V DC	40W	n/a	Y
AL-98-07-24040-3WIRE	24V DC	40W	n/a	Y
AL-98-07-24096-3WIRE	24V DC	96W	n/a	Y

### Lutron® EcoSystem Controls

Item #	Desc.	Voltage
AL-98-07-9901	EcoSystem Control Module	n/a
AL-98-07-9901-8	EcoSystem Control Module - 8 pack	n/a

### Dimmers & Switches

#### SlimDim Wireless Dimmers

Using long-range RF technology, these LED dimmers avoid the need for connecting directly to a power supply, offering freedom to mount anywhere. Can also be used as a fob for mobile, hand-held control.



#### Remote Control Dimmer Switch

Provides full dimming and on/off control, and includes a touch wheel that allows for direct visual selection of brightness. It can also operate up to four independent zones






AL-70-01-0001	SlimDim Wireless Dimmer
AL-70-01-0002	Single Color Receiver (96W max.) (sold separately)




AL-60-03-0001	Remote Control Dimmer Switch
AL-70-01-0002	Single Channel Receiver (sold separately)
AL-60-03-0004	Wireless Receiver (sold separately)

# 2700K




Note: specifications are representative of the diode type and not a particular tape light article.

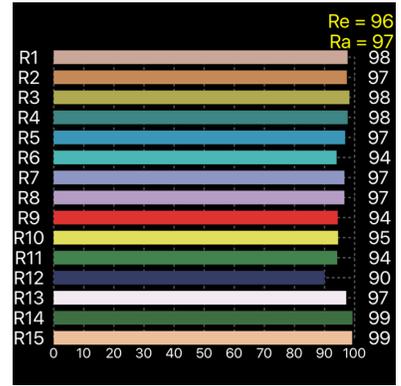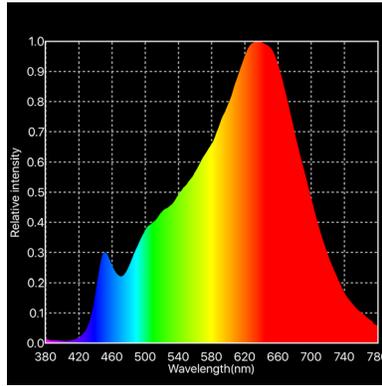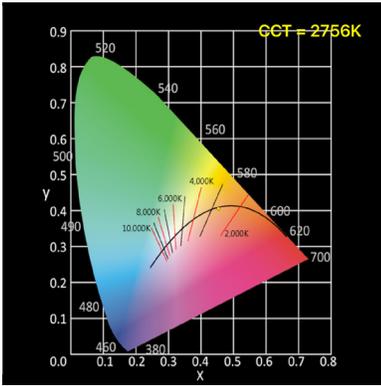

# 3000K

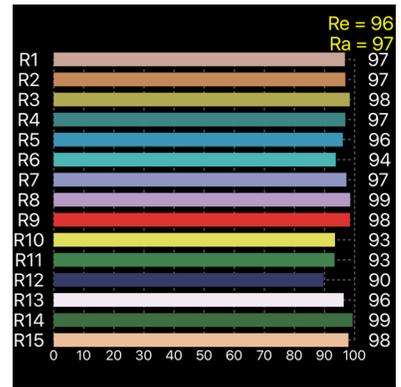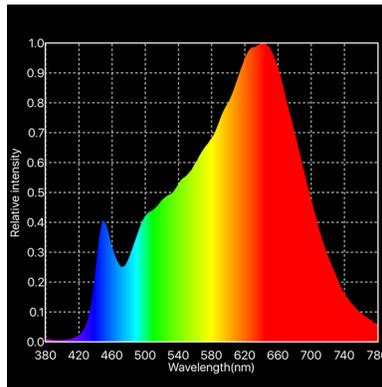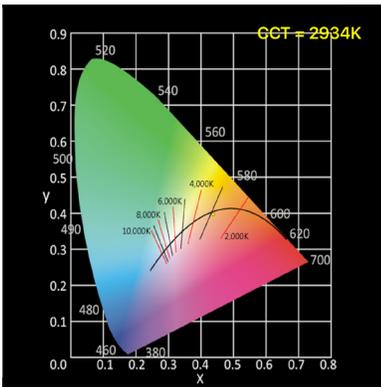

# 4200K

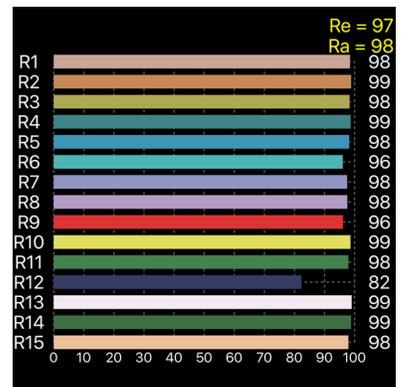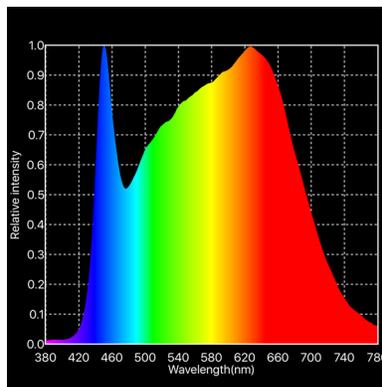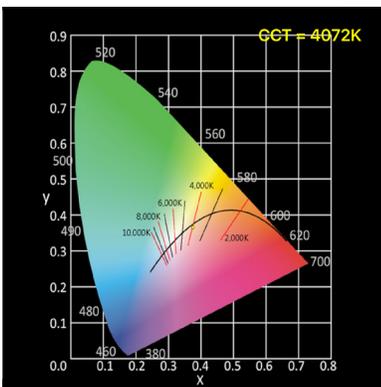

# 5000K

