

SlimDim™ Wireless Dimmer AL-70-01-0001



SlimDim Wireless Dimmers are a revolution in lighting control. Using long range RF technology, these dimmers avoid the need for connecting directly to a power supply, cutting down on cost and installation time. SlimDims are simple and quick to install.

- Mount anywhere: on a wall or in an outlet
- Fob controller detaches for mobile, hand-held control
- Available in white finish
- Dimming and on/off control for PrimaLine® white tape: pair with the Single Color Receiver (AL-70-01-0002)
- Dimmers and receivers are sold separately


Specifications

- Dimensions: 2.6 x 1.3 x 0.35 in.
- Battery Type: CR2032
- RF Freq.: 868/915/434MHz
- Max. Receivers: 8

AL-70-01-0001	Single Color Dimmer
AL-70-01-0002	Single Channel Receiver (sold separately)

Keypad

Press and hold this button to increase brightness.

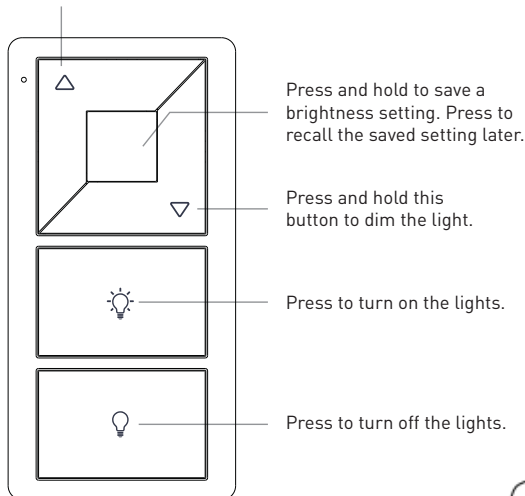

Operation

How to Pair the SlimDim Single Color Dimmer with the Single Channel Receiver (AL-70-01-0002)

1. Connect the receiver according to the diagram below.
2. Open the battery compartment and remove the plastic tab next to the battery.
3. Turn on the wireless dimmer. The power indicator will light up.
4. Short press the "Learning Key" button on the receiver for one second or less.
5. Touch the up or down buttons on the dimmer.
6. The remote control indicator light will blink to confirm pairing.

How to Unpair the Receiver and Controller

1. Hold down the "Learning Key" button on the receiver for 5 seconds. When the LED lights flash, the controller has been unpaired.

