

MOUNTING INSTRUCTIONS

1. First remove cover by unscrewing two bolts holding cover to the can.
2. Remove LED Brick Light reflector by unscrewing two bolts holding reflector to top of LED assembly and gently lifting reflector out of can.
3. Remove LED assembly by unscrewing one bolt on top of assembly, and gently lifting assembly just out of the can.
4. Place all loose parts in a secure location until reassembly.
5. Select a mounting location for the LED Brick Light. Fixture should be within reach of 110V power, located approximately 9 inches above the surface to be lit, and situated at the best location along the mounting surface for the illumination task.
6. LED Brick Light (LBL) may be used in any standard brick wall in lieu of brick. Make sure LBL is completely wired and inspected before wall is complete. See can dimensions on diagram.
7. LED Brick Light has flanges that will allow the can to be securely affixed to almost any surface with the four mounting screws provided. Installations in drywall will require a wood backing behind drywall. Place can in hole (7-3/4" x 3-1/4" x 2-1/2") and mark the position of the four mounting screws. Remove can and drill a pilot hole for the screws. Reposition can in hole, and securely fasten the can to the mounting surface by firmly tightening four mounting screws.

WIRING INSTRUCTIONS


CAUTION! Only qualified electricians, or people familiar with household electrical circuits, should bring 110VAC power to the fixture. Wiring may require an inspection by the local building department. Check with your local building department before installation.

CAUTION! Before bringing 110VAC power to the fixture, make sure incoming wire is not "hot" and all power coming to the wire is off.

CAUTION! All connections must be made in accordance with this instruction manual, current NEC, and all local building codes. Minimum 90°C supply conductors.

CAUTION! Use RTV silicone and water-tight fittings on all wet location connections to fixture.

1. Through one of the three NPT fittings provided, bring in 110V power wiring. If 110V wire will not conveniently enter one of the three NPT fittings provided, simply unscrew the can, rotate can 180 degrees and reinstall. Can is entirely symmetrical, and 180 degree rotation will not affect mounting holes.
2. Secure wire to fixture with the appropriate strain relief (not provided).
3. Strip 1/3" (8mm) of the insulation off each incoming 110V power wire. Connect white incoming 110V wire (neutral wire) to push-in connector on white wire from LED driver. Connect black incoming 110V wire to push-in connector on black wire from LED driver. Connect ground wire to push-in connector on green wire screwed into can. Push all wires firmly down into connectors, so that uninsulated wire is not exposed.
4. Reinstall assembly, reflector and cover.

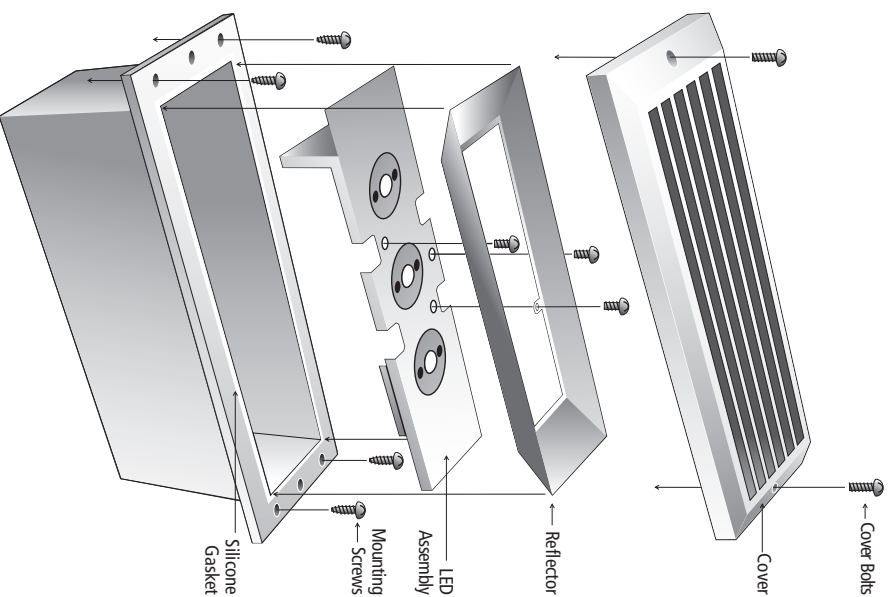

REPLACEMENT OF LED ASSEMBLY


Field replacement of the LED assembly is not allowed by UL standards at this time. If you encounter a problem with the LED assembly:

1. Turn off all power to the LED Brick Light.
2. With test lamp verify power is coming through the LED Brick Light fixture circuit.
3. Verify 110VAC wiring and connections: black wire to black LED wire push-in connector, white power wire to white LED wire push-in connector, and green ground wire to green wire push-in connector. Make sure all conductors have 1/3" of insulation stripped of and are fully seated into push-in connector.
4. Verify connections with red wire from LED driver to red wire from LED assembly, and black wire from LED driver to black wire from LED assembly.

If above have been proven correct, turn off power to the fixture, remove fixture from mounting surface, cut incoming power wire, return fixture to place of purchase for replacement.


WARNING! If this fixture is to be placed in a masonry or brick wall, you must use a Concrete Cap during installation to provide the proper void for the fixture cover. Failure to use the Concrete Cap will almost guarantee concrete or grout forming against fixture can flange, and poor cover-to-can seal (see below). Poor cover seal will allow water/moisture into fixture resulting in LED and Xenon failure.

Without Concrete Cap



Concrete or grout prevents cover from allowing a proper seal


With Concrete Cap



Concrete form used during fixture can installation allows for proper void and good cover-to-can seal


THROUGH-WIRE, 110V POWER

- Disconnect from all 110V power prior to installation.
- Connections must be made in accordance with all local electric codes and/or NEC.
- Minimum 90°C supply conductors.
- Interconnect up to 150 fixtures per 110VAC tap.
- 14 gauge (Romex Type) or better wire is required.
- Requires strain reliefs.
- Installations in wet locations should use RTV silicone or water-tight fittings on all connections to fixtures.

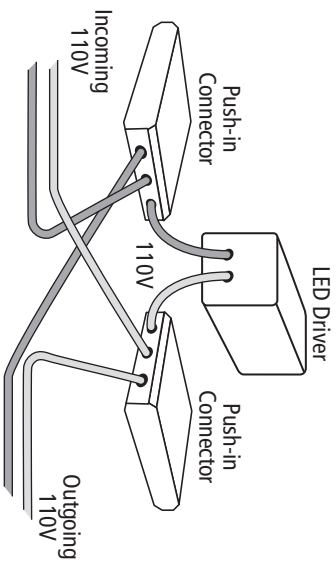

OTHER LED PRODUCTS BY NSL


LED STEP LIGHT



UL US
c
Wet, IC Ceiling and Shower Locations

Long lasting LED technology in a die cast aluminum step light fixture.

LED MINIDISC LIGHT



UL US
c
Wet, IC and Direct Burial Locations

The perfect mini light for outlining and illuminating architectural features.

LED REFLECTIVE LIGHT



UL US
c
Wet and IC Locations

Medium size wall-mounted fixture that reflects the brightness of 22 LEDs.

MICRO LED LIGHT STRIP




UL US
c
Wet Location

Embedded LED/chip technology extruded in a flexible light strip.

INSTALLATION INSTRUCTIONS

LED BRICK LIGHT

LED technology in a brick-size die cast aluminum fixture

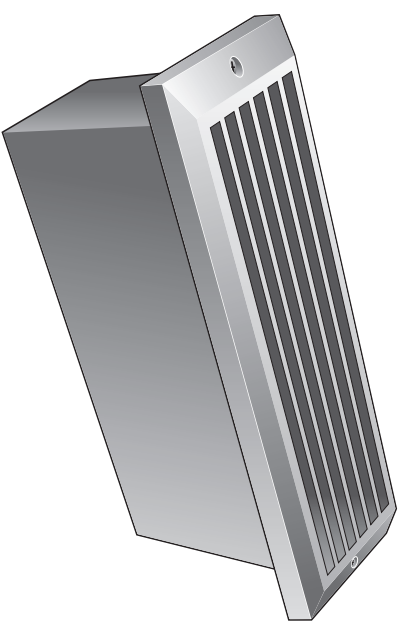

- 60,000-hour LED life

- Ultra low 5 watts per fixture

- Louver, Scoop & Prism cover designs

- White, Bronze, Black and Aluminum colors

- Die cast aluminum design suitable for concrete pour

- UL Listed for wet and IC Installations

NATIONAL SPECIALTY LIGHTING

ARCHITECTURAL AND DECORATIVE LIGHTING

LOUISVILLE, CO 80027

www.nslusa.com

© 2008 National Specialty Lighting

9/08

NSL

NATIONAL SPECIALTY LIGHTING

UL US
LISTED

Wet and IC Locations