


PrimaVolt™ Dimmable Drivers



Features:

- Short circuit and over current protection
- Dry/wet location (IP67)
- Air-cooled for long life operation
- Compatible with leading edge and trailing edge TRIAC dimmers
- Wide-range compatibility, flicker-free dimming
- UL Compliant with Class 2 power supplies

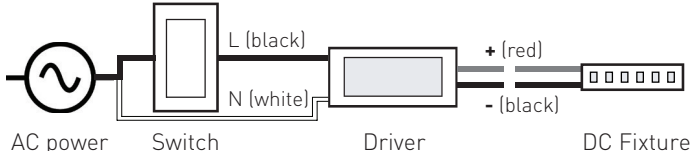

Item #		AL-98-03-12080	AL-98-03-24080 CLASS 2
Output	DC Voltage	12V DC	24V DC
	Voltage Accuracy	±0.5%	±0.5%
	Rated current	6.66A	3.33A
	Rated power	80W	80W
	Minimum Load	60%	60%
Input	Voltage Range	90~135V AC/170~250V AC	
	Frequency Range	47~63HZ	
	Power Factor (Avg.)	PF≥0.95/110V ; PF≥0.96/170V ; PF≥0.95/220V ; PF≥0.93/265V	
	Full Load Efficiency (Avg.)	>85% [12V DC]	>86% [24V DC]
	AC Current (Avg.)	0.61A/110V AC — 0.58A/170V AC — 0.46A/220V AC — 0.41A/265V AC	
	Leakage Current	<0.25mA/110V/220V AC	
Protection	Short Circuit	Short circuit protection and autorecovery	
	Over Voltage	≤140V AC (90~135V) , ≤270V AC (170~265V)	
Environment	Working Temp. / Humidity	-40~+60°C / -40~+140°F / 20~90%RH, non-condensing	
	Storage Temp. Humidity	-40~+80°C, -40~176°F / 10~95%RH	
Safety & EMC	Safety Standards	EN-60950-1. EN-61347-1/-2/-13	
	Withstand Voltage	I/P-O/P: 3.75KV AC	
	Isolation Resistance	I/P-O/P: 100MΩ/500V DC/25°C, 77°F/70%RH	
	EMC Emission	Compliance to EN55015, EN61000-3-2 (≥50% load)	
	EMC Immunity	Compliance to EN55015; EN61000-4-2,3, 4, 5, 6, 8, 11, EN61547, a light industry level (surge4KV)	
Other	Warranty	3 Year Limited	
	Size	8.27" L x 2.7" W x 1.7" H	

1. All parameters NOT specially mentioned are measured at 110V, 230V AC input, rated load, and 25°C, 77°F of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.

Optional Accessory

Dedicated junction boxes designed to fit specific PrimaVolt models.

Item #	Use with PrimaVolt models
AL-98-03-9902	60W, 80W

