


# LED 2016

RGB STRIP LIGHT WITH 150 LEDs



12 V SYSTEM

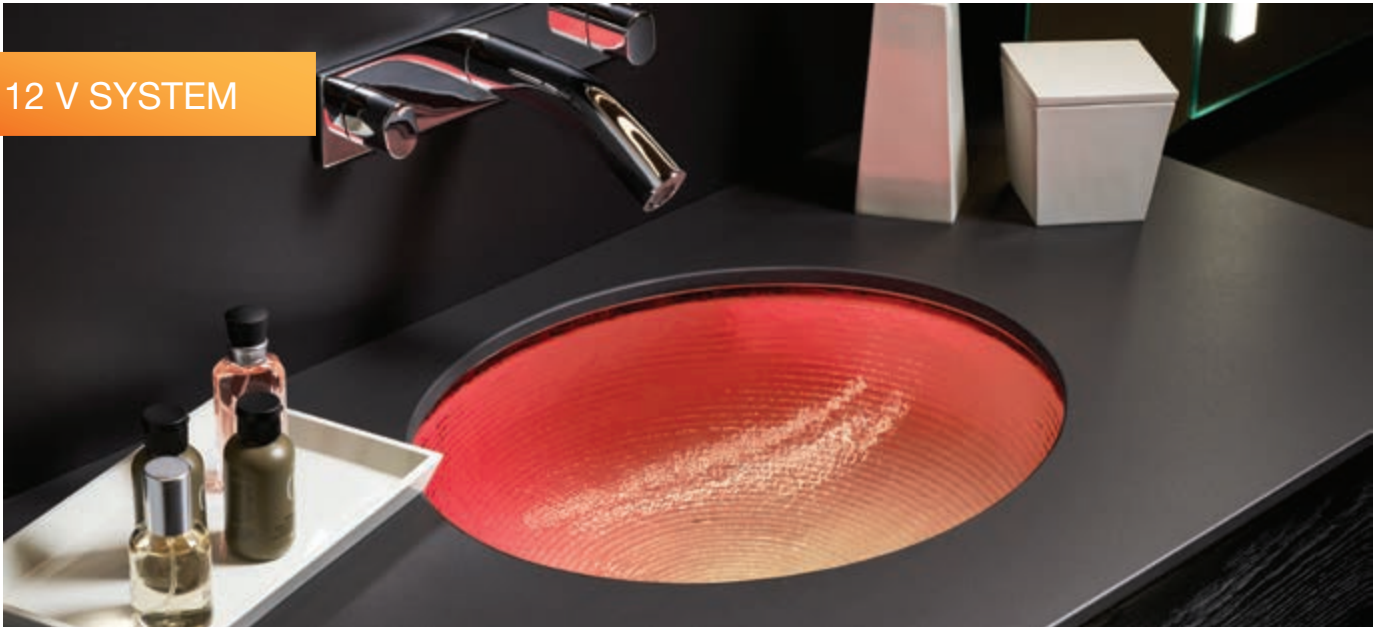

> Extremely bright light sources with changing colors

**Note**

Dimmed with mixer/remote only.



Mains lead, with 12 V plug system and clip  
2000 mm (78 3/4")



> Item No. 833.74.764 **SRP \$6.00**

4000 mm (157 1/2")

> Item No. 833.74.745 **SRP \$6.00**



Interconnecting lead, with clip  
50 mm (2")

> Item No. 833.74.766 **SRP \$4.00**

500 mm (19 11/16")

> Item No. 833.74.767 **SRP \$4.00**

1000 mm (39 3/8")

> Item No. 833.74.779 **SRP \$4.00**

2000 mm (78 3/4")


> Item No. 833.74.768 **SRP \$4.00**




> Driver see page 51


<b>Item No.</b>	<b>833.73.450</b>
<b>SRP</b>	<b>\$200.00</b>
Light Color (K)	RGB
L x W x H	5000 x 12 x 2.4 mm (196 7/8" x 1/2" x 1/8")
Wattage	30 at max. 4.2 m (13' 9 3/8") per meter, 2.16 per foot
LEDs	150 (30 per meter) (9 per foot)
Lumen	1050
Lumen per watt	29
Material/Finish	Plastic, white
Supplied with	2 m (78 3/4") lead


**Note** Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"

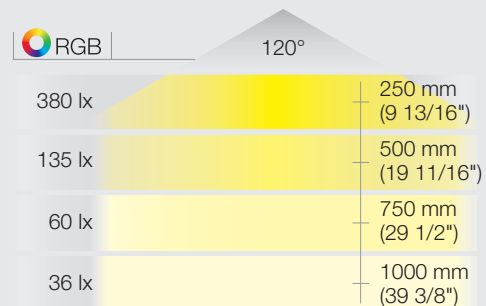


**LED 2016**

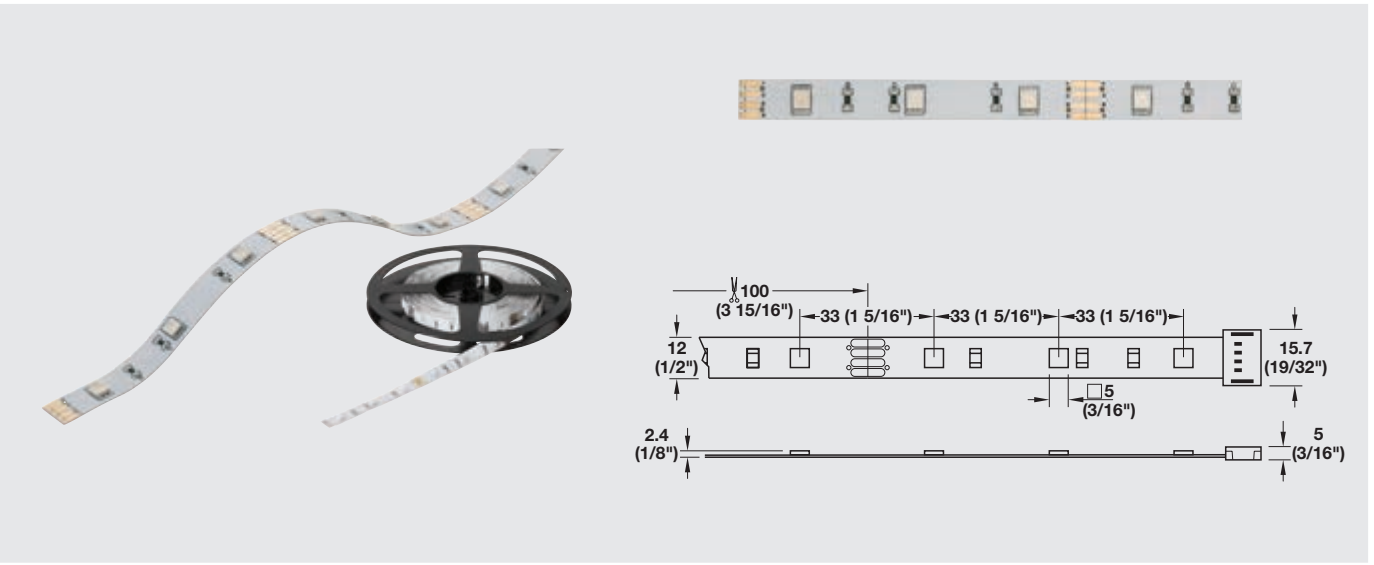

**+**  Clip connector, 2.5A  
 > Item No. 833.74.761 **SRP \$4.00**

 Corner connector, rigid, 2.5A  
 > Item No. 833.74.760 **SRP \$4.00**


 Remote control  
 > Item No. 833.74.708 **SRP \$40.00**

**Note**  
 Max. 10 color mixers controlled with 1 remote within a radius of 15 m (49').

**+**  Color mixer, with 4-way distributor,  
 Max.: 30 W, Power consumption: 0.6 W  
 W x D x H: 90 x 53 x 16 mm  
 (3 9/16" x 2 1/16" x 5/8")  
 > Item No. 833.74.802 **SRP \$60.00**

**Note**  
 RGB remote and mixer must be paired for normal operation.

 9-way distributor  
 1 m (39 3/8")  
 > Item No. 833.74.741 **SRP \$4.00**

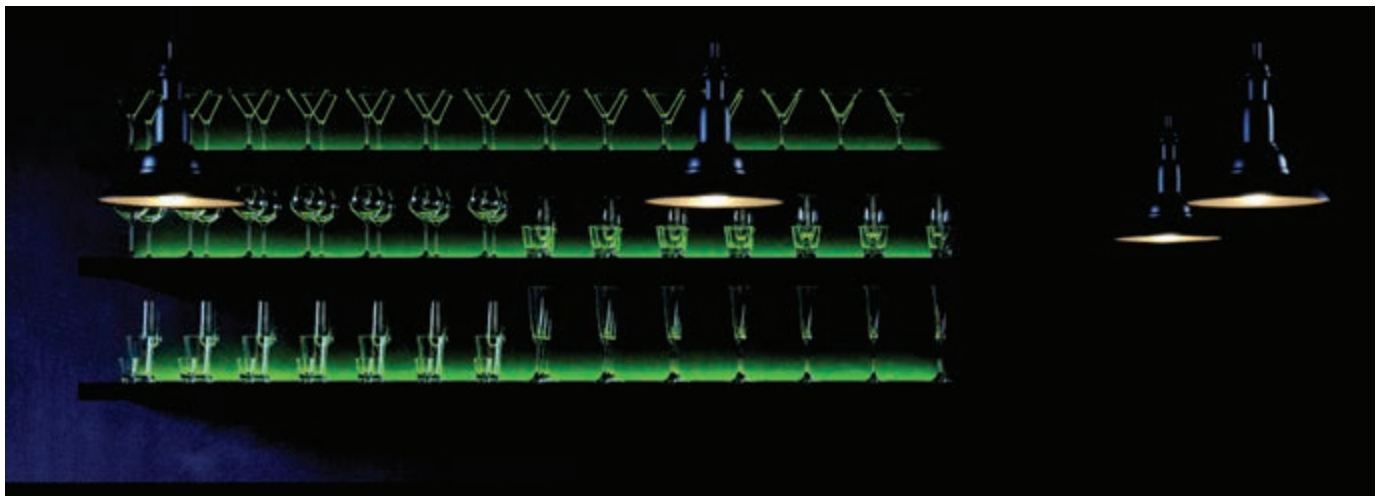


# LOOX LED DRIVER

CONSTANT VOLTAGE 12 V


12 V SYSTEM

THIN PROFILE

- 1 Item No. 833.74.960  
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 20 \text{ W}$
- 2 Item No. 833.74.962  
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 40 \text{ W}$
- 3 Item No. 833.74.964  
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 60 \text{ W}$   
**max. 42 W per light output**

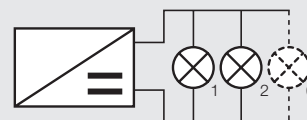

Parallel connection

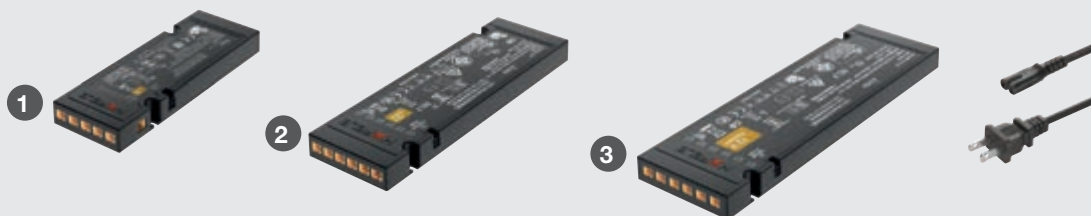

- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches
- > Max. 42 W per light output
- > Lead length from driver to switch: Max.: 6 m (236 1/4")

- ! > Class 2
- > Efficiency Level VI
- > Degree of protection : IP20
- > Loos drivers cannot be controlled by a dimmer wall switch

Item No.	833.74.960 1	833.74.962 2	833.74.964 3
SRP	\$36.00	\$60.00	\$80.00
L x W	140 x 50 x 16 (5 1/2" x 2" x 5/8")	190 x 60 x 16 (7 1/2" x 2 3/8" x 5/8")	230 x 70 x 16 (9 1/16" x 2 3/4" x 5/8")
Wattage	0 – 20	0 – 40	0 – 60
Standby Power Consumption Wattage	<0.1	<0.1	<0.2
Input voltage	100 – 240 V~; 50 – 60 Hz		
Output voltage	12 V DC		
Output current	1.67 A	3.33 A	5.0 A
Number of slots	6 for lights, 1 for switch, 1 for power cord		
Material/Finish	Plastic, black		
Supplied with	Mounting accessories, US power cord		
<b>Note</b>	Loos Lights and Drivers are "Suitable for use within Closet Storage Spaces"		

- ➔ > Switches see pages 113 - 116
- > Extension leads see page 127

- + Power cord with 90° plug  
2 m (78 3/4")
- > Item No. 833.89.017 **SRP \$5.00**


- 90° Plug adapter
- > Item No. 833.89.018 **SRP \$7.00**

Country-specific 2 m (78 3/4") primary leads								3 m (118")
Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00
Plug design								
Designation	UK	AU	EU	US	JP	CN	US	US
Voltage (V)	250	250	250	120	100	250	120	120

# LED DRIVER

## CONSTANT VOLTAGE PLUG-IN DRIVER


### 12 V SYSTEM

-  > Degree of protection: IP20
- > 4 m (157 1/2") lead
- > Class 2




Item No.	833.74.934	833.74.936	833.74.938
<b>SRP</b>	<b>\$12.00</b>	<b>\$20.00</b>	<b>\$30.00</b>
L x W x H	61 x 37 x 43 (2 3/8" x 1 1/2" x 1 11/16")	78 x 46 x 54 (3 1/16" x 1 13/16" x 2 1/8")	84 x 50 x 58 (3 5/16" x 2" x 2 5/16")
Stand-by Power Consumption	0.3 W		
Input voltage	100-240 V; 50-60 Hz		
Output voltage	12 VDC		
Output current	6	15	27
Degree of protection	IP 20		
Number of slots	1 socket for lead		
Material/Finish	Plastic, black		

**Note**  
Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"

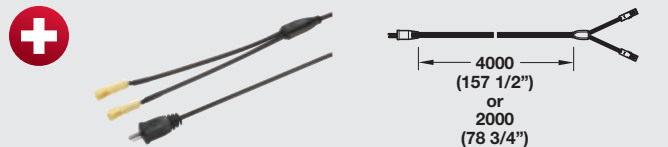


Secondary lead 12 V, Plastic, black with 2 connections

- > 4 m (157 1/2") Item No. 833.74.749 **SRP \$8.00**
- > 2 m (78 3/4") Item No. 833.74.791 **SRP \$8.00**

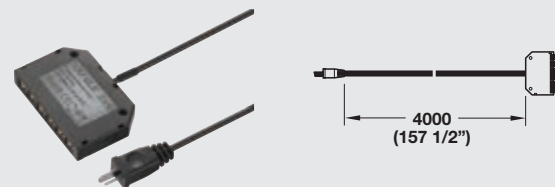


Secondary lead 12 V, Plastic, black with 6-way distributor, 4 m (157 1/2")

- > Item No. 833.74.748 **SRP \$12.00**

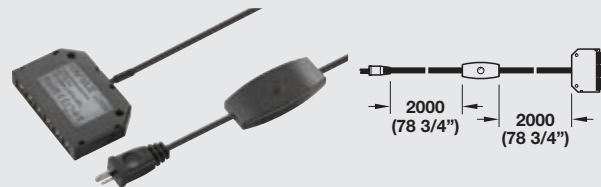

Secondary lead 12 V, Plastic, black with dimmer and 6-way distributor

- > Item No. 833.74.709 **SRP \$30.00**

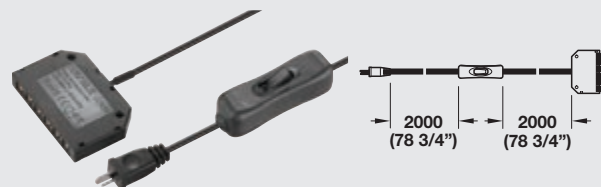

Secondary lead 12 V, Plastic, black with rocker switch and 6-way distributor


- > Item No. 833.74.746 **SRP \$24.00**



# ACCESSORIES

## RGB CONTROL

### RGB Color Mixer 12 V, with 4-way distributor RGB

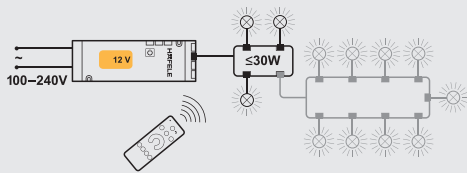

<b>Item No.</b>	<b>833.74.802</b>
<b>SRP</b>	<b>\$60.00</b>
Wattage	30
Power consumption (W)	0.3
Material/Finish	Plastic, silver colored



> Radio frequency 2.4 GHz

### Remote for RGB 12 V



<b>Item No.</b>	<b>833.74.708</b>
<b>SRP</b>	<b>\$40.00</b>
Drill hole Ø x Height	40 x 14.4 (1 5/8" x 9/16")
Material/Finish	Plastic, black
Supplied with	Replaceable CR 2032 button cell lithium battery



- > Exclusively for controlling RGB lights
- > Color control, color change, dimming (with memory function), storage of 3 lighting scenes
- > Max. 10 color mixers can be controlled with 1–10 remote controls within a radius of 15 m (49')



- 8-way distributor, for RGB lights
- Plastic, white
- > Item No. 833.74.741
- SRP \$6.00**

> Coin battery see page 117