

# LED 2018

## FLEXIBLE LIGHT

### 12 V SYSTEM



- > Convenient to re-position
- > Integrated glass lens
- > With integrated rotary switch on light head
- > Surface or recess mounted



> Not dimmable



> Driver see page 51

3000 K

69°

1249 lx	250 mm (9 13/16")
312 lx	500 mm (19 11/16")
139 lx	750 mm (29 1/2")
78 lx	1000 mm (39 3/8")

Item No.	833.74.100	833.74.110
<b>SRP</b>	<b>\$36.00</b>	<b>\$36.00</b>
Light Color (K)	3000 (warm white)	
Installation	Surface	Recess
Ø x W	545.5 x 32 mm (21 1/2" x 1 1/4")	526 x 32 mm (20 11/16" x 1 1/4")
Wattage	2	
LEDs	1	
Lumen	89	
Lumen per watt	45	
CRI	81	
Energy Efficiency class	A	
Weighted energy consumption	2.20	
Material/Finish	Aluminum, silver colored anodized	
Supplied with	2 m (78 3/4") lead, mounting material	
<b>Note</b> Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"		

# LOOX LED DRIVER

CONSTANT VOLTAGE 12 V

12 V SYSTEM


THIN  
PROFILE

1 Item No. 833.74.960  
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 20 \text{ W}$


2 Item No. 833.74.962  
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 40 \text{ W}$

3 Item No. 833.74.964  
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 60 \text{ W}$

**max. 42 W per light output**



Parallel connection

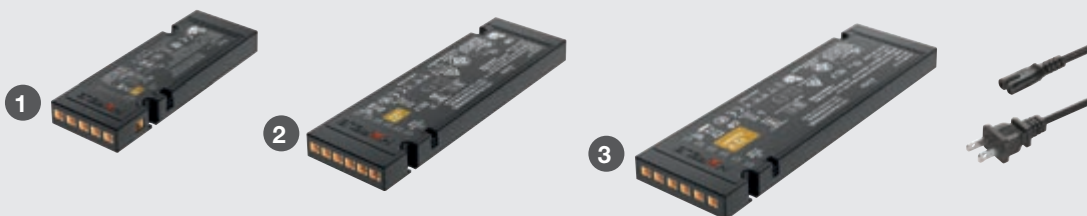

- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches
- > Max. 42 W per light output
- > Lead length from driver to switch: Max.: 6 m (236 1/4")



- > Class 2
- > Efficiency Level VI
- > Degree of protection : IP20
- > Loxx drivers cannot be controlled by a dimmer wall switch

Item No.	833.74.960 ①	833.74.962 ②	833.74.964 ③
SRP	\$36.00	\$60.00	\$80.00
L x W	140 x 50 x 16 (5 1/2" x 2" x 5/8")	190 x 60 x 16 (7 1/2" x 2 3/8" x 5/8")	230 x 70 x 16 (9 1/16" x 2 3/4" x 5/8")
Wattage	0 – 20	0 – 40	0 – 60
Standby Power Consumption Wattage	<0.1	<0.1	<0.2
Input voltage	100 – 240 V~; 50 – 60 Hz		
Output voltage	12 V DC		
Output current	1.67 A	3.33 A	5.0 A
Number of slots	6 for lights, 1 for switch, 1 for power cord		
Material/Finish	Plastic, black		
Supplied with	Mounting accessories, US power cord		

#### Note

Loxx Lights and Drivers are "Suitable for use within Closet Storage Spaces"



- > Switches see pages 113 - 116
- > Extension leads see page 127



Power cord with 90° plug  
 2 m (78 3/4")  
 > Item No. 833.89.017 **SRP \$5.00**



90° Plug adapter  
 > Item No. 833.89.018 **SRP \$7.00**

#### Country-specific 2 m (78 3/4") primary leads

	Country-specific 2 m (78 3/4") primary leads							3 m (118")
Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00
Plug design								
Designation	UK	AU	EU	US	JP	CN	US	US
Voltage (V)	250	250	250	120	100	250	120	120

# LED DRIVER

## CONSTANT VOLTAGE PLUG-IN DRIVER

### 12 V SYSTEM




- > Degree of protection: IP20
- > 4 m (157 1/2") lead
- > Class 2



Item No.	833.74.934	833.74.936	833.74.938
SRP	\$12.00	\$20.00	\$30.00
L x W x H	61 x 37 x 43 (2 3/8" x 1 1/2" x 1 11/16")	78 x 46 x 54 (3 1/16" x 1 13/16" x 2 1/8")	84 x 50 x 58 (3 5/16" x 2" x 2 5/16")
Stand-by Power Consumption	0.3 W		
Input voltage	100-240 V; 50-60 Hz		
Output voltage	12 VDC		
Output current	6	15	27
Degree of protection	IP 20		
Number of slots	1 socket for lead		
Material/Finish	Plastic, black		


#### Note

Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"

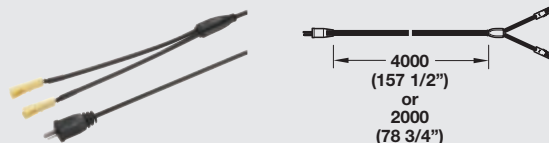


Secondary lead 12 V, Plastic, black with 2 connections

- > 4 m (157 1/2") Item No. 833.74.749 **SRP \$8.00**
- > 2 m (78 3/4") Item No. 833.74.791 **SRP \$8.00**

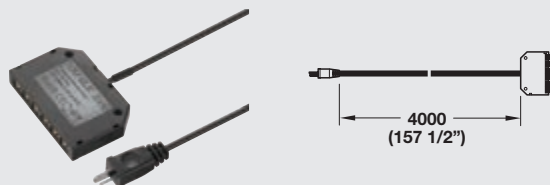


Secondary lead 12 V, Plastic, black with 6-way distributor, 4 m (157 1/2")

- > Item No. 833.74.748 **SRP \$12.00**

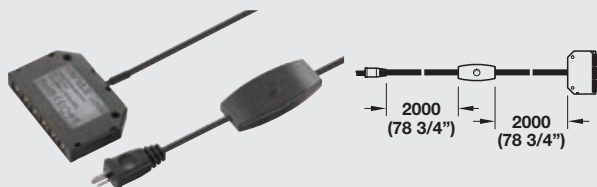

Secondary lead 12 V, Plastic, black with dimmer and 6-way distributor

- > Item No. 833.74.709 **SRP \$30.00**

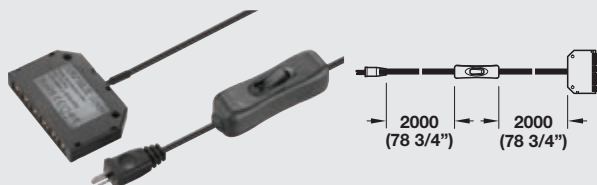

Secondary lead 12 V, Plastic, black with rocker switch and 6-way distributor

- > Item No. 833.74.746 **SRP \$24.00**