

LED 2022

RECESS/SURFACE MOUNTED LIGHT, ROUND

0% 100%



Water Tolerant




- > Protected from water spray as a recess mounted light
- > Can be used as a surface mounted light using optional surface mount rings and wedges
- > Degree of Protection: IP44 recess; IP20 surface

3000 K	4000 K	5000 K	90°
650 lx	650 lx	650 lx	250 mm (9 13/16")
163 lx	163 lx	163 lx	500 mm (19 11/16")
72 lx	72 lx	72 lx	750 mm (29 1/2")
40 lx	40 lx	40 lx	1000 mm (39 3/8")

Item No.	833.72.040	833.72.043	833.72.041	833.72.044	833.72.042	833.72.045
SRP	\$20.00	\$20.00	\$20.00	\$20.00	\$20.00	\$20.00
Light Color (K)	3000 (warm white)		4000 (cool white)		5000 (cool white)	
Drill hole	Ø26 mm (1 1/16")					
Ø x H	35 x 14 mm (1 3/8" x 9/16")					
Wattage	1.5					
LEDs	3					
Lumen	105					
Lumen per watt	70					
CRI	82		87		88	
Energy Efficiency class	A+					
Weighted energy consumption	1.65					
Material	Aluminum					
Finish	silver colored anodized	chrome-plated polished	silver colored anodized	chrome-plated polished	silver colored anodized	chrome-plated polished
Supplied with	2 m (78 3/4") lead					
Note Loox Lights and Drivers are “Suitable for use within Closet Storage Spaces”						

LED 2022

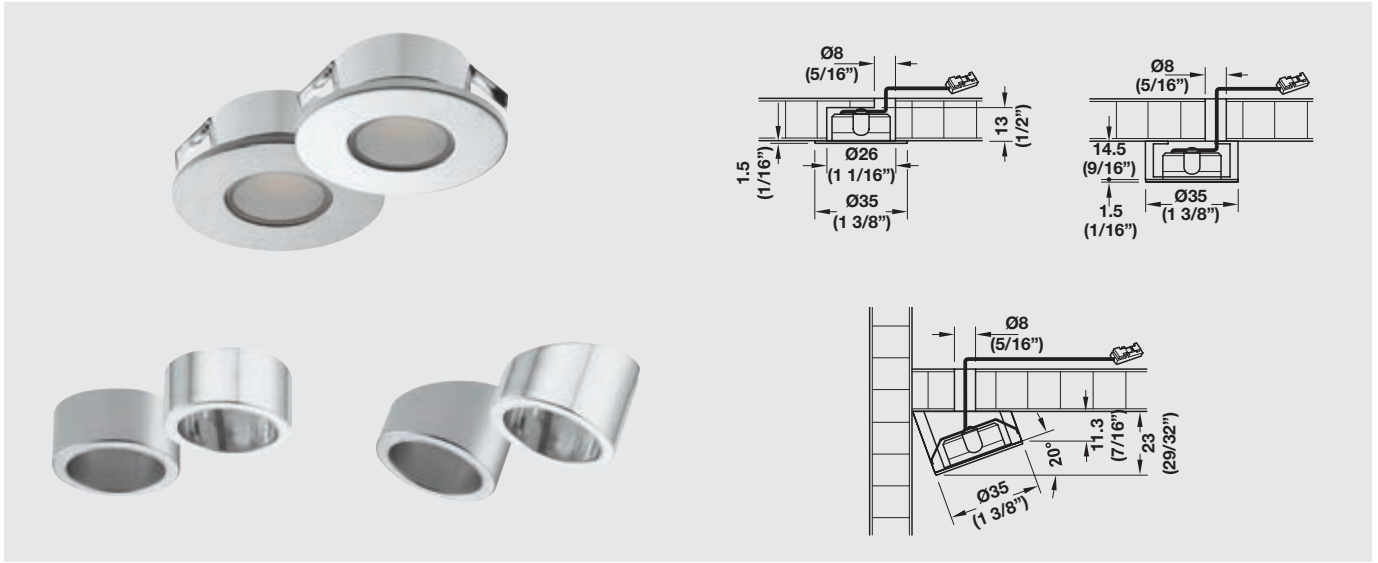

- > Dimmable
- > For mounting in drilled hole, with clip fastener or for screw mounting.



- > Driver see page 51
- > Drill bit see page 146



- Surface mounted trim ring, Aluminum
- > chrome-plated
Item No. 833.72.830 **SRP \$4.00**
- > silver colored anodized
Item No. 833.72.831 **SRP \$4.00**

- Surface mounted trim ring, wedge-shaped, Aluminum
- > chrome-plated
Item No. 833.72.833 **SRP \$4.00**
- > silver colored anodized
Item No. 833.72.832 **SRP \$4.00**

Note

IP20 protection with surface mounted trim ring



LOOX LED DRIVER

CONSTANT VOLTAGE 12 V

12 V SYSTEM


THIN
PROFILE

1 Item No. 833.74.960
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 20 \text{ W}$


2 Item No. 833.74.962
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 40 \text{ W}$

3 Item No. 833.74.964
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 60 \text{ W}$

max. 42 W per light output



Parallel connection

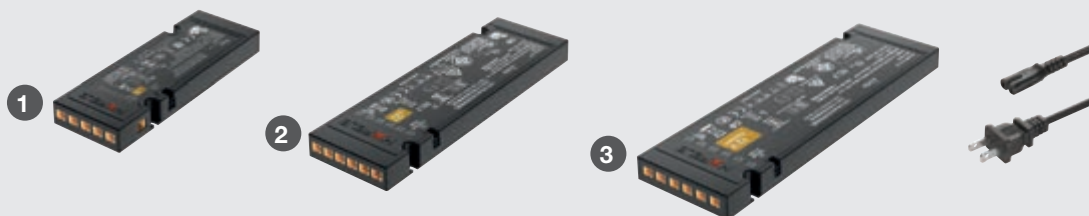

- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches
- > Max. 42 W per light output
- > Lead length from driver to switch: Max.: 6 m (236 1/4")



- > Class 2
- > Efficiency Level VI
- > Degree of protection : IP20
- > Loxx drivers cannot be controlled by a dimmer wall switch

Item No.	833.74.960 1	833.74.962 2	833.74.964 3
SRP	\$36.00	\$60.00	\$80.00
L x W	140 x 50 x 16 (5 1/2" x 2" x 5/8")	190 x 60 x 16 (7 1/2" x 2 3/8" x 5/8")	230 x 70 x 16 (9 1/16" x 2 3/4" x 5/8")
Wattage	0 – 20	0 – 40	0 – 60
Standby Power Consumption Wattage	<0.1	<0.1	<0.2
Input voltage	100 – 240 V~; 50 – 60 Hz		
Output voltage	12 V DC		
Output current	1.67 A	3.33 A	5.0 A
Number of slots	6 for lights, 1 for switch, 1 for power cord		
Material/Finish	Plastic, black		
Supplied with	Mounting accessories, US power cord		

Note

Loxx Lights and Drivers are "Suitable for use within Closet Storage Spaces"



- > Switches see pages 113 - 116
- > Extension leads see page 127



Power cord with 90° plug
 2 m (78 3/4")
 > Item No. 833.89.017 **SRP \$5.00**



90° Plug adapter
 > Item No. 833.89.018 **SRP \$7.00**

Country-specific 2 m (78 3/4") primary leads

Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00
Plug design								
Designation	UK	AU	EU	US	JP	CN	US	US
Voltage (V)	250	250	250	120	100	250	120	120

LED DRIVER

CONSTANT VOLTAGE PLUG-IN DRIVER

12 V SYSTEM




- > Degree of protection: IP20
- > 4 m (157 1/2") lead
- > Class 2



Item No.	833.74.934	833.74.936	833.74.938
SRP	\$12.00	\$20.00	\$30.00
L x W x H	61 x 37 x 43 (2 3/8" x 1 1/2" x 1 11/16")	78 x 46 x 54 (3 1/16" x 1 13/16" x 2 1/8")	84 x 50 x 58 (3 5/16" x 2" x 2 5/16")
Stand-by Power Consumption	0.3 W		
Input voltage	100-240 V; 50-60 Hz		
Output voltage	12 VDC		
Output current	6	15	27
Degree of protection	IP 20		
Number of slots	1 socket for lead		
Material/Finish	Plastic, black		


Note

Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"

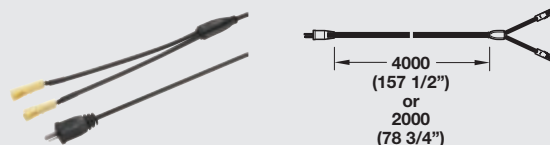


Secondary lead 12 V, Plastic, black with 2 connections

- > 4 m (157 1/2") Item No. 833.74.749 **SRP \$8.00**
- > 2 m (78 3/4") Item No. 833.74.791 **SRP \$8.00**

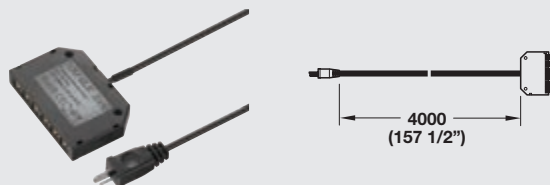


Secondary lead 12 V, Plastic, black with 6-way distributor, 4 m (157 1/2")

- > Item No. 833.74.748 **SRP \$12.00**

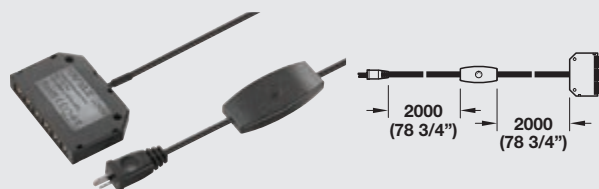

Secondary lead 12 V, Plastic, black with dimmer and 6-way distributor

- > Item No. 833.74.709 **SRP \$30.00**

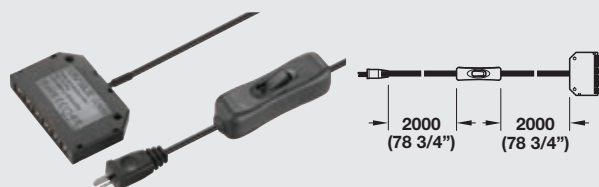

Secondary lead 12 V, Plastic, black with rocker switch and 6-way distributor

- > Item No. 833.74.746 **SRP \$24.00**