LED 2037

ELITE LIGHTED WARDROBE TUBE KIT






- > *CRI 90 lights are Title 24 Compliant
- > *CRI 90 lights offer more vibrant, true color rendering than lower CRI products
- > A great way to brighten up your closet space
- > 2 color temperatures available
- > 4 finishes to choose from
- > Comes ready to install
- > Tube is cut 6 mm (1/4") shorter than nominal size to allow room for end caps and driver cable exit

Note

Position cable around and out of tube between lens and end cap or through end cap exit hole.



- > Driver see page 51
- > Components see page 107






| Matt aluminum | 833.71.032 | 833.71.033 | 833.71.034 | 833.71.035 | 833.71.024 | 833.71.025 | 833.71.026 | 833.71.027 |
|--|--|------------|------------|-------------------|------------|------------|------------|------------|
| Polished chrome | 833.71.064 | 833.71.065 | 833.71.066 | 833.71.067 | 833.71.056 | 833.71.057 | 833.71.058 | 833.71.059 |
| Matt nickel | 830.28.780 | 830.28.781 | 830.28.782 | 830.28.783 | 830.28.785 | 830.28.786 | 830.28.787 | 830.28.788 |
| Oil-rubbed bronze | 833.71.048 | 833.71.049 | 833.71.050 | 833.71.051 | 833.71.040 | 833.71.041 | 833.71.042 | 833.71.043 |
| SRP | \$46.00 | \$54.00 | \$62.00 | \$70.00 | \$46.00 | \$54.00 | \$62.00 | \$70.00 |
| Light Color (K) | 3000 (warm white) | | | 4000 (cool white) | | | | |
| Length | 18" | 24" | 30" | 36" | 18" | 24" | 30" | 36" |
| Wattage | 1.8 | 2.4 | 3.1 | 3.7 | 1.8 | 2.4 | 3.1 | 3.7 |
| Lumen | 146 | 195 | 243 | 292 | 146 | 195 | 243 | 292 |
| CRI | 90* | | | | | | | |
| Material | Aluminum | | | | | | | |
| Supplied with | Tube, lens, Loox 2037 flexible strip light, 2 m (78 3/4") driver cable, 2 end caps | | | | | | | |
| Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces" | | | | | | | | |



LOOX LED DRIVER

CONSTANT VOLTAGE 12 V

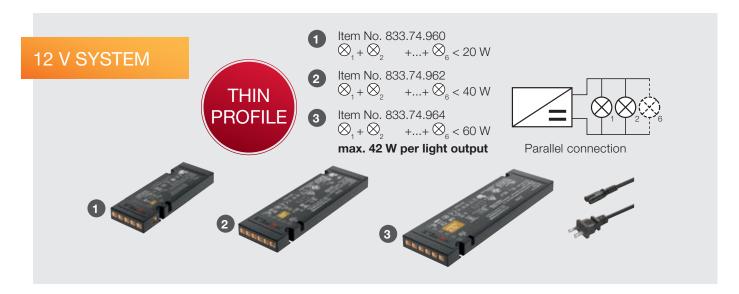

- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches
- > Max. 42 W per light output
- > Lead length from driver to switch: Max.: 6 m (236 1/4")



- > Class 2
- > Efficiency Level VI
- > Degree of protection: IP20
- > Loox drivers cannot be controlled by a dimmer wall switch

| Item No. | 833.74.960 1 | 833.74.962 2 | 833.74.964 3 | | | | |
|--|--|--|---|--|--|--|--|
| SRP | \$36.00 | \$60.00 | \$80.00 | | | | |
| LxW | 140 x 50 x 16 (5 1/2" x 2" x 5/8") | 190 x 60 x 16 (7 1/2" x 2 3/8" x 5/8") | 230 x 70 x 16 (9 1/16" x 2 3/4" x 5/8") | | | | |
| Wattage | 0 – 20 | 0 – 40 | 0 - 60 | | | | |
| Standby Power Consumption Wattage | <0.1 | <0.1 | <0.2 | | | | |
| Input voltage | 100 – 240 V~; 50 – 60 Hz | | | | | | |
| Output voltage | 12 V DC | | | | | | |
| Output current | 1.67 A | 3.33 A | 5.0 A | | | | |
| Number of slots | 6 for lights, 1 for switch, 1 for power cord | | | | | | |
| Material/Finish | Plastic, black | | | | | | |
| Supplied with | Mounting accessories, US power cord | | | | | | |
| Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces" | | | | | | | |



- > Switches see pages 113 116
- > Extension leads see page 127



Power cord with 90° plug 2 m (78 3/4")

> Item No. 833.89.017 SRP \$5.00



- 90° Plug adapter
- > Item No. 833.89.018 SRP \$7.00

| Country-specific 2 m (78 3/4") primary leads | | | | | | | 3 m (118") | |
|--|------------|------------|------------|------------|------------|------------|------------|------------|
| Item No. | 833.89.000 | 833.89.001 | 833.89.002 | 833.89.003 | 833.89.016 | 833.89.005 | 833.89.050 | 833.89.008 |
| SRP | \$10.00 | \$4.00 | \$4.00 | \$4.00 | \$4.00 | \$4.00 | \$4.00 | \$6.00 |
| Plug design | | | •• | | | | > | |
| Designation | UK | AU | EU | US | JP | CN | US | US |
| Voltage (V) | 250 | 250 | 250 | 120 | 100 | 250 | 120 | 120 |



















LED DRIVER

CONSTANT VOLTAGE PLUG-IN DRIVER


12 V SYSTEM



- > Degree of protection: IP20
- > 4 m (157 1/2") lead
- > Class 2



| Item No. | 833.74.934 | 833.74.936 | 833.74.938 | | | |
|--|---|--|---|--|--|--|
| SRP | \$12.00 | \$30.00 | | | | |
| LxWxH | 61 x 37 x 43 (2 3/8" x 1 1/2" x 1 11/16") | 78 x 46 x 54 (3 1/16" x 1 13/16" x 2 1/8") | 84 x 50 x 58 (3 5/16" x 2" x 2 5/16") | | | |
| Stand-by Power Consumption | 0.3 W | | | | | |
| Input voltage | 100-240 V; 50-60 Hz | | | | | |
| Output voltage | 12 VDC | | | | | |
| Output current | 6 15 27 | | | | | |
| Degree of protection | IP 20 | | | | | |
| Number of slots | 1 socket for lead | | | | | |
| Material/Finish | Plastic, black | | | | | |
| Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces" | | | | | | |



— 4000 — (157 1/2")

Secondary lead 12 V, Plastic, black with 6-way distributor, 4 m (157 1/2")

> Item No. 833.74.748 **SRP \$12.00**



Secondary lead 12 V, Plastic, black with dimmer and 6-way distributor

> Item No. 833.74.709 **SRP \$30.00**



Secondary lead 12 V, Plastic, black with rocker switch and 6-way distributor

> Item No. 833.74.746 SRP \$24.00