

LED 2040

RECESS/SURFACE MOUNTED LIGHT, MODULAR

0% 100%



Water Tolerant



12 V SYSTEM

IP44

- > *CRI 90 lights are Title 24 Compliant
- > *CRI 90 lights offer more vibrant, true color rendering than lower CRI products
- > A flexible solution for the 35 mm (1 3/8") hole diameter
- > Degree of Protection: IP44 recess mounted; IP20 surface mounted

Note

Trim rings and leads sold separately.

2700 K	3000 K	4000 K	5000 K	90°	
530 lx	660 lx	720 lx	800 lx		250 mm (9 13/16")
135 lx	180 lx	185 lx	220 lx		500 mm (19 11/16")
55 lx	80 lx	85 lx	95 lx		750 mm (29 1/2")
35 lx	40 lx	50 lx	55 lx		1000 mm (39 3/8")

Item No.	833.72.370	833.72.371	833.72.372	833.72.333
SRP	\$18.00	\$18.00	\$18.00	\$18.00
Light Color (K)	2700 warm white	3000 warm white	4000 cool white	5000 cool white
Drill hole	Ø35 mm (1 3/8")			
Ø x H	38.5 x 13.5 mm (1 9/16" x 17/32")			
Wattage	1.5			
LEDs	3			
Lumen	75	88	96	110
Lumen per watt	50	59	64	73
CRI	90*			83
Energy Efficiency class	A+			
Weighted energy consumption	1.65			
Material	Aluminum			

Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"

LOOX LED DRIVER

CONSTANT VOLTAGE 12 V

12 V SYSTEM


THIN
PROFILE

1 Item No. 833.74.960
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 20 \text{ W}$


2 Item No. 833.74.962
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 40 \text{ W}$

3 Item No. 833.74.964
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 60 \text{ W}$

max. 42 W per light output



Parallel connection

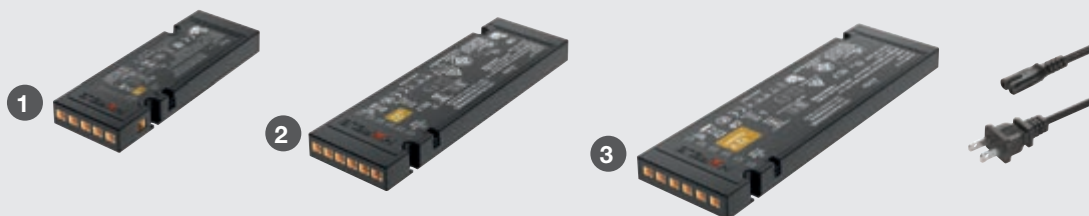

- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches
- > Max. 42 W per light output
- > Lead length from driver to switch: Max.: 6 m (236 1/4")



- > Class 2
- > Efficiency Level VI
- > Degree of protection : IP20
- > Loxx drivers cannot be controlled by a dimmer wall switch

Item No.	833.74.960 1	833.74.962 2	833.74.964 3
SRP	\$36.00	\$60.00	\$80.00
L x W	140 x 50 x 16 (5 1/2" x 2" x 5/8")	190 x 60 x 16 (7 1/2" x 2 3/8" x 5/8")	230 x 70 x 16 (9 1/16" x 2 3/4" x 5/8")
Wattage	0 – 20	0 – 40	0 – 60
Standby Power Consumption Wattage	<0.1	<0.1	<0.2
Input voltage	100 – 240 V~; 50 – 60 Hz		
Output voltage	12 V DC		
Output current	1.67 A	3.33 A	5.0 A
Number of slots	6 for lights, 1 for switch, 1 for power cord		
Material/Finish	Plastic, black		
Supplied with	Mounting accessories, US power cord		

Note

Loxx Lights and Drivers are "Suitable for use within Closet Storage Spaces"



- > Switches see pages 113 - 116
- > Extension leads see page 127



Power cord with 90° plug
 2 m (78 3/4")
 > Item No. 833.89.017 **SRP \$5.00**



90° Plug adapter
 > Item No. 833.89.018 **SRP \$7.00**

Country-specific 2 m (78 3/4") primary leads

	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008
Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00
Plug design								
Designation	UK	AU	EU	US	JP	CN	US	US
Voltage (V)	250	250	250	120	100	250	120	120

LED DRIVER

CONSTANT VOLTAGE PLUG-IN DRIVER

12 V SYSTEM




- > Degree of protection: IP20
- > 4 m (157 1/2") lead
- > Class 2



Item No.	833.74.934	833.74.936	833.74.938
SRP	\$12.00	\$20.00	\$30.00
L x W x H	61 x 37 x 43 (2 3/8" x 1 1/2" x 1 11/16")	78 x 46 x 54 (3 1/16" x 1 13/16" x 2 1/8")	84 x 50 x 58 (3 5/16" x 2" x 2 5/16")
Stand-by Power Consumption	0.3 W		
Input voltage	100-240 V; 50-60 Hz		
Output voltage	12 VDC		
Output current	6	15	27
Degree of protection	IP 20		
Number of slots	1 socket for lead		
Material/Finish	Plastic, black		


Note

Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"

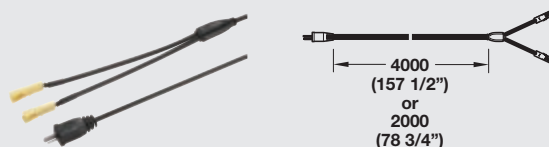


Secondary lead 12 V, Plastic, black with 2 connections

- > 4 m (157 1/2") Item No. 833.74.749 **SRP \$8.00**
- > 2 m (78 3/4") Item No. 833.74.791 **SRP \$8.00**

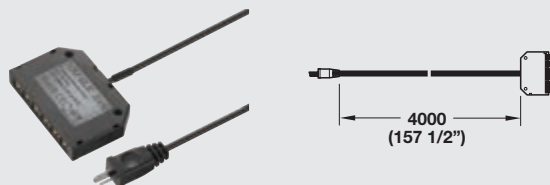


Secondary lead 12 V, Plastic, black with 6-way distributor, 4 m (157 1/2")

- > Item No. 833.74.748 **SRP \$12.00**

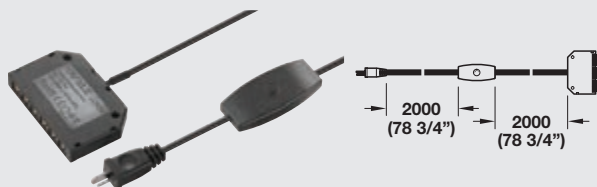

Secondary lead 12 V, Plastic, black with dimmer and 6-way distributor

- > Item No. 833.74.709 **SRP \$30.00**

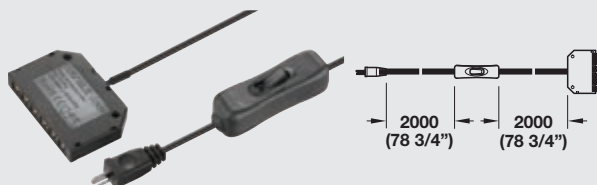

Secondary lead 12 V, Plastic, black with rocker switch and 6-way distributor

- > Item No. 833.74.746 **SRP \$24.00**