


# LED 2047

RECESS/SURFACE MOUNTED LIGHT



- > \*CRI 90 lights are Title 24 Compliant
- > \*CRI 90 lights offer more vibrant, true color rendering than lower CRI products
- > With frosted glass cover and steel housing components
- > Optional surface mounted housing provides flexibility in installation
- > Degree of Protection: IP20

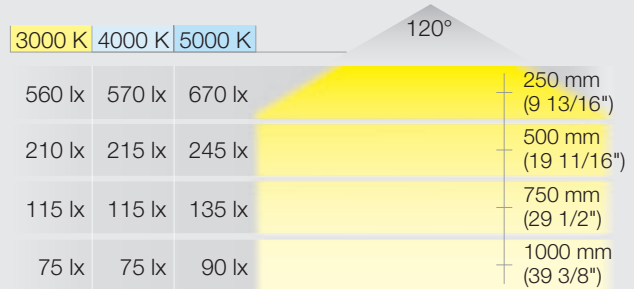

Item No.	833.72.300	833.72.301	833.72.302	833.72.340	833.72.341	833.72.342	833.72.390	833.72.391	833.72.392
<b>SRP</b>	<b>\$16.00</b>	<b>\$16.00</b>	<b>\$16.00</b>	<b>\$16.00</b>	<b>\$16.00</b>	<b>\$16.00</b>	<b>\$16.00</b>	<b>\$16.00</b>	<b>\$16.00</b>
Light Color (K)	3000 (warm white)	4000 (cool white)	5000 (cool white)	3000 (warm white)	4000 (cool white)	5000 (cool white)	3000 (warm white)	4000 (cool white)	5000 (cool white)
Drill hole	Ø55 mm (2 3/16")								
Ø x H	65 x 12 mm (2 9/16" x 1/2")								
Wattage	3								
LEDs	24								
Lumen	210	216	240	210	216	240	210	216	240
Lumen per watt	70	72	80	70	72	80	70	72	80
CRI	90*		83	90*		83	90*		83
Energy Efficiency class	A+								
Weighted energy consumption	3.30								
Material	Steel								
Finish	polished chrome-plated			silver colored			stainless steel colored		
Supplied with	2 m (78 3/4") lead								
<b>Note</b> Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"									

LED 2047




- > Dimmable
- > For mounting in drilled hole with clip fastener or screw mounting



- > Driver see page 51
- > Drill bit see page 146



- Surface mounted trim ring, Steel
- > polished chrome-plated  
Item No. 833.72.802 **SRP \$4.00**
  - > silver colored  
Item No. 833.72.803 **SRP \$4.00**
  - > stainless steel colored  
Item No. 833.72.804 **SRP \$4.00**

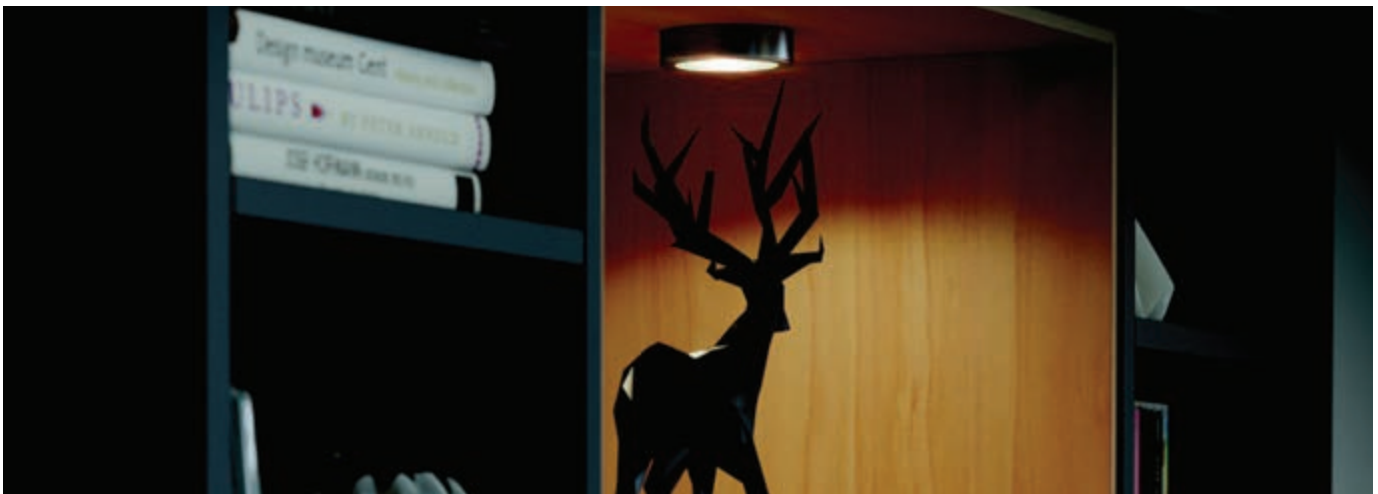


# LOOX LED DRIVER

CONSTANT VOLTAGE 12 V

12 V SYSTEM

THIN PROFILE

- 1 Item No. 833.74.960  
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 20 \text{ W}$
- 2 Item No. 833.74.962  
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 40 \text{ W}$
- 3 Item No. 833.74.964  
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 60 \text{ W}$   
**max. 42 W per light output**



Parallel connection



- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches
- > Max. 42 W per light output
- > Lead length from driver to switch: Max.: 6 m (236 1/4")



- > Class 2
- > Efficiency Level VI
- > Degree of protection : IP20
- > Loos drivers cannot be controlled by a dimmer wall switch

Item No.	833.74.960 1	833.74.962 2	833.74.964 3
SRP	\$36.00	\$60.00	\$80.00
L x W	140 x 50 x 16 (5 1/2" x 2" x 5/8")	190 x 60 x 16 (7 1/2" x 2 3/8" x 5/8")	230 x 70 x 16 (9 1/16" x 2 3/4" x 5/8")
Wattage	0 – 20	0 – 40	0 – 60
Standby Power Consumption Wattage	<0.1	<0.1	<0.2
Input voltage	100 – 240 V~; 50 – 60 Hz		
Output voltage	12 V DC		
Output current	1.67 A	3.33 A	5.0 A
Number of slots	6 for lights, 1 for switch, 1 for power cord		
Material/Finish	Plastic, black		
Supplied with	Mounting accessories, US power cord		
<b>Note</b>	Loos Lights and Drivers are "Suitable for use within Closet Storage Spaces"		



- > Switches see pages 113 - 116
- > Extension leads see page 127



- Power cord with 90° plug  
2 m (78 3/4")
- > Item No. 833.89.017 **SRP \$5.00**




- 90° Plug adapter
- > Item No. 833.89.018 **SRP \$7.00**

Country-specific 2 m (78 3/4") primary leads								3 m (118")
Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00
Plug design								
Designation	UK	AU	EU	US	JP	CN	US	US
Voltage (V)	250	250	250	120	100	250	120	120

# LED DRIVER

## CONSTANT VOLTAGE PLUG-IN DRIVER

### 12 V SYSTEM

-  > Degree of protection: IP20
- > 4 m (157 1/2") lead
- > Class 2




Item No.	833.74.934	833.74.936	833.74.938
<b>SRP</b>	<b>\$12.00</b>	<b>\$20.00</b>	<b>\$30.00</b>
L x W x H	61 x 37 x 43 (2 3/8" x 1 1/2" x 1 11/16")	78 x 46 x 54 (3 1/16" x 1 13/16" x 2 1/8")	84 x 50 x 58 (3 5/16" x 2" x 2 5/16")
Stand-by Power Consumption	0.3 W		
Input voltage	100-240 V; 50-60 Hz		
Output voltage	12 VDC		
Output current	6	15	27
Degree of protection	IP 20		
Number of slots	1 socket for lead		
Material/Finish	Plastic, black		

**Note**  
Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"




Secondary lead 12 V, Plastic, black with 2 connections

- > 4 m (157 1/2") Item No. 833.74.749 **SRP \$8.00**
- > 2 m (78 3/4") Item No. 833.74.791 **SRP \$8.00**

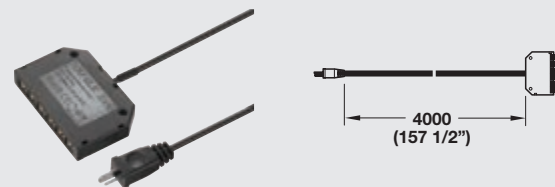


Secondary lead 12 V, Plastic, black with 6-way distributor, 4 m (157 1/2")

- > Item No. 833.74.748 **SRP \$12.00**

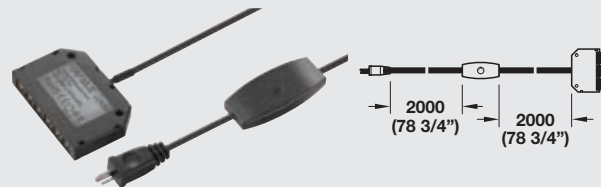

Secondary lead 12 V, Plastic, black with dimmer and 6-way distributor

- > Item No. 833.74.709 **SRP \$30.00**

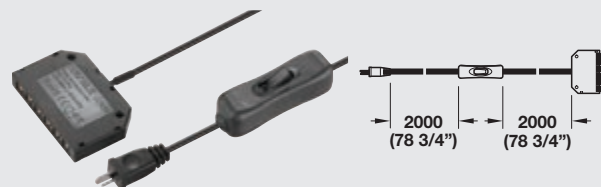

Secondary lead 12 V, Plastic, black with rocker switch and 6-way distributor

- > Item No. 833.74.746 **SRP \$24.00**