


LED 3010

RECESS/SURFACE MOUNTED LIGHT



24 V SYSTEM

IP20

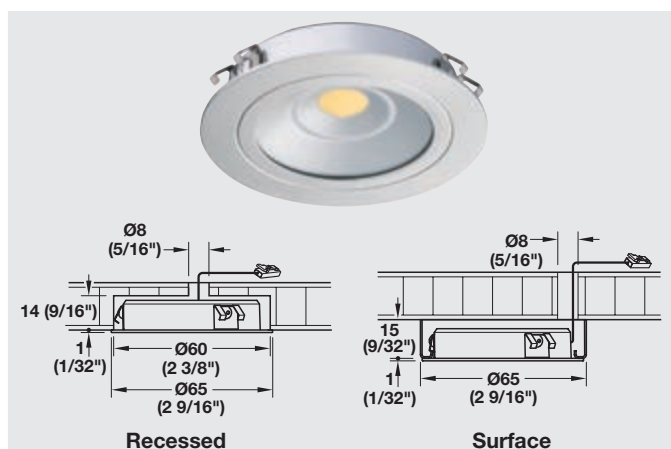

Item No.	833.75.062	833.75.063	833.75.064
SRP	\$36.00	\$36.00	\$36.00
Light Color (K)	2700 (warm white)	3000 (warm white)	4000 (cool white)
Drill hole	Ø60 mm (2 3/8")		
Ø x H	65 x 13 mm (2 9/16" x 17/32")		
Wattage	3.25		
LEDs	1 (COB)		
Lumen	250	267	271
Lumen per watt	77	82	83
CRI	90*		
Energy Efficiency class	A+		
Weighted energy consumption	3.58		
Material/Finish	Aluminum, silver colored anodized		
Supplied with	2 m (78 3/4") lead, clear glass lens, frosted replacement glass lens, mounting hardware		
Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"			

- > *CRI 90 lights are Title 24 Compliant
- > *CRI 90 lights offer more vibrant, true color rendering than lower CRI products
- > Bright, even luminosity
- > 3 installation options
- > Dimmable only with Loox driver



- > Driver see page 88
- > Components see page 127
- > Drill bit see page 146




Surface mounted ring
Ø x H: Ø65 x 15 (2 9/16" x 9/16")
Steel, silver colored

- > Item No. 833.77.730 SRP \$ 4.00



Housing, for ring
Steel, silver colored

- > Item No. 833.77.731 SRP \$ 10.00

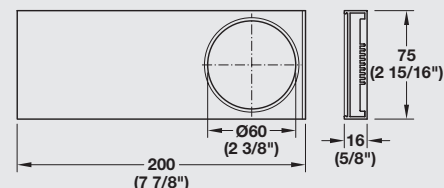

2700 K	3000 K	4000 K	105°
1240 lx	1240 lx	1325 lx	250 (9 13/16")
310 lx	310 lx	331 lx	500 (19 11/16")
138 lx	138 lx	147 lx	750 (29 1/2")
78 lx	78 lx	83 lx	1000 (39 3/8")


LOOX LED DRIVER

CONSTANT VOLTAGE 24 V

24 V SYSTEM

THIN
PROFILE

- 1 Item No. 833.77.945
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 20 \text{ W}$
- 2 Item No. 833.77.947
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 40 \text{ W}$
- 3 Item No. 833.77.949
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 90 \text{ W}$
max. 84 W per light output



Parallel connection



- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches
- > Max. 84 W per light output
- > Lead length from driver to switch: Max. 6 m (236 1/4")



- > Class 2
- > Efficiency Level VI
- > Degree of protection : IP20
- > Loxx drivers cannot be controlled by a dimmer wall switch

Item No.	833.77.945 1	833.77.947 2	833.77.949 3
SRP	\$36.00	\$60.00	\$120.00
L x W x H	140 x 50 x 16 (5 1/2" x 2" x 5/8")	190 x 60 x 16 (7 1/2" x 2 3/8" x 5/8")	316 x 70 x 16 (8 3/16" x 2 3/4" x 5/8")
Wattage	0 – 20	0 – 40	0 – 90
Standby Power Consumption Wattage	<0.1	<0.1	<0.2
Input voltage	100 – 240 V~; 50 – 60 Hz		
Output voltage	24 V DC		
Output current	0.83 A	1.67 A	3.75 A
Number of slots	6 for lights, 1 for switch, 1 for power cord		
Material/Finish	Plastic, black		
Supplied with	Mounting accessories, US power cord		
Note	Loxx Lights and Drivers are "Suitable for use within Closet Storage Spaces"		



- > Switches see pages 113 - 116
- > Extension leads see page 127



Power cord with 90° plug, Plastic, black
2 m (78 3/4")

- > Item No. 833.89.017 **SRP \$5.00**



90° Plug adapter, Plastic, black

- > Item No. 833.89.018 **SRP \$7.00**

Country-specific 2 m (78 3/4") primary leads

3 m (118")

Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00
Plug design								
Designation	UK	AU	EU	US	JP	CN	US	US
Voltage (V)	250	250	250	120	100	250	120	120