

LED 3030

SILICONE STRIP LIGHT

0  100%

24 V SYSTEM

IP20

- > *CRI 90 lights are Title 24 Compliant
- > *CRI 90 lights offer more vibrant, true color rendering than lower CRI products
- > Ideal for applications with direct illumination
- > The cut silicone strip can be re-used
- > Self-adhesive
- > The light can be shortened every 50 mm (2")
- > Max. strip light length: 5 m (16' 4 7/8")
- > Max. watts per lead: 48
- > Degree of protection: IP20



> Dimmable



> Driver see page 88



2700 K	3000 K	4000 K	5000 K	120°
1500 lx	1500 lx	1500 lx	1500 lx	250 (9 13/16")
450 lx	450 lx	450 lx	450 lx	500 (19 11/16")
220 lx	220 lx	220 lx	220 lx	750 (29 1/2")
130 lx	130 lx	130 lx	130 lx	1000 (39 3/8")

Note

The chart values apply to a strip light length of 0.5 m (19 11/16").

Item No.	833.76.220	833.76.221	833.76.222	833.76.223
SRP	\$240.00	\$240.00	\$240.00	\$240.00
Light Color (K) (LED only)	2700 (warm white)	3000 (warm white)	4000 (cool white)	5000 (cool white)
Light Color (K) (in Silicone)	3400	4090	6084	10770
L x W x H	5,000 x 8 x 2.3 mm (196 5/8" x 5/16" x 1/16")			
Wattage	48 (9.6 per meter) (3.0 per foot)			
LEDs	600 (120 per meter)			
Lumen	4600			
Lumen per watt	95			
CRI	90*			83
Energy Efficiency class	A+			
Weighted energy consumption	10.56 per meter			
Material/Finish	Plastic, white			
Supplied with	5 meter roll with 2 m (78 3/4") lead			
Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"				

LED 3030

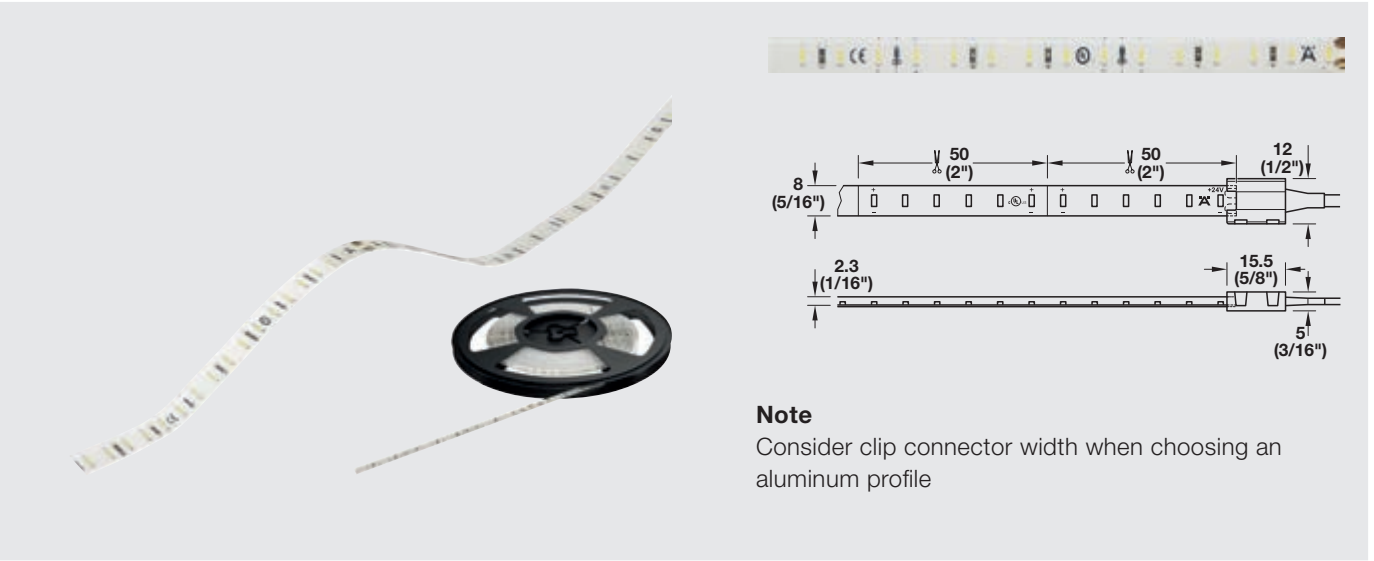

Interconnecting lead, 3.5 A/20 AWG, with clip
50 mm (2'')

> Item No. 833.73.771 **SRP \$4.00**

500 mm (19 11/16'')


> Item No. 833.73.772 **SRP \$4.00**

1000 mm (39 3/8'')

> Item No. 833.73.773 **SRP \$4.00**

2000 mm (78 3/4'')

> Item No. 833.73.774 **SRP \$4.00**



Lead, 3.5 A/20 AWG, with 24 V plug system and clip
2000 mm (78 3/4'')

> Item No. 833.77.804 **SRP \$6.00**




Clip connector, max. 3.5 A

> Item No. 833.73.730 **SRP \$2.00**



Corner connector, rigid, max. 3.5 A, left and right

> Item No. 833.73.736 **SRP \$2.00**

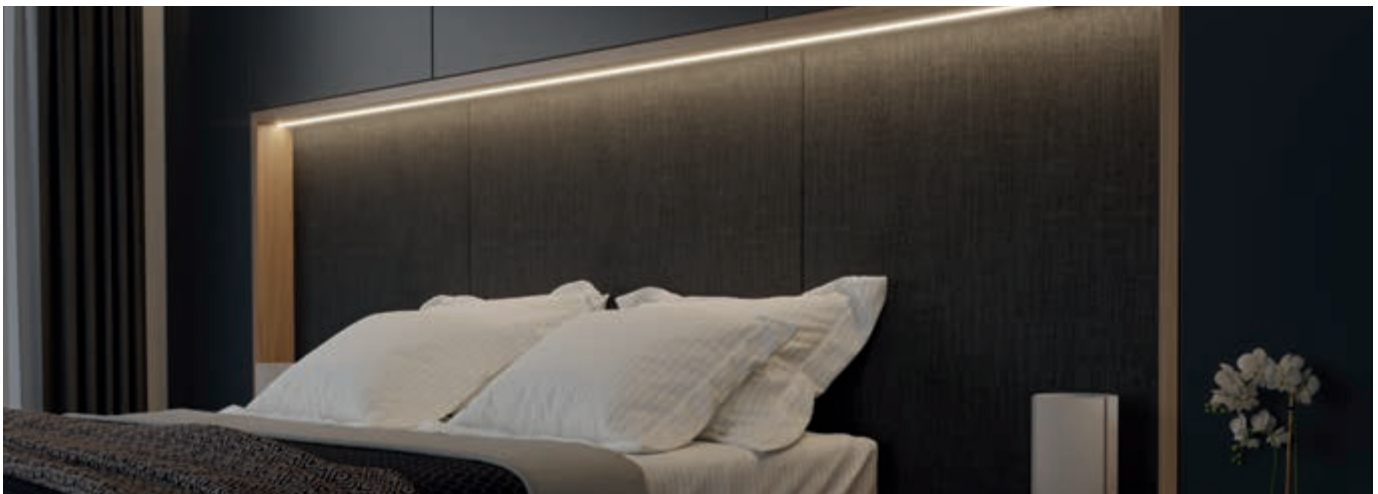


LOOX LED DRIVER

CONSTANT VOLTAGE 24 V

24 V SYSTEM

THIN
PROFILE

- 1 Item No. 833.77.945
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 20 \text{ W}$
- 2 Item No. 833.77.947
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 40 \text{ W}$
- 3 Item No. 833.77.949
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 90 \text{ W}$
max. 84 W per light output



- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches
- > Max. 84 W per light output
- > Lead length from driver to switch: Max. 6 m (236 1/4")



- > Class 2
- > Efficiency Level VI
- > Degree of protection : IP20
- > Loxx drivers cannot be controlled by a dimmer wall switch

Item No.	833.77.945 1	833.77.947 2	833.77.949 3
SRP	\$36.00	\$60.00	\$120.00
L x W x H	140 x 50 x 16 (5 1/2" x 2" x 5/8")	190 x 60 x 16 (7 1/2" x 2 3/8" x 5/8")	316 x 70 x 16 (8 3/16" x 2 3/4" x 5/8")
Wattage	0 – 20	0 – 40	0 – 90
Standby Power Consumption Wattage	<0.1	<0.1	<0.2
Input voltage	100 – 240 V~; 50 – 60 Hz		
Output voltage	24 V DC		
Output current	0.83 A	1.67 A	3.75 A
Number of slots	6 for lights, 1 for switch, 1 for power cord		
Material/Finish	Plastic, black		
Supplied with	Mounting accessories, US power cord		
Note	Loxx Lights and Drivers are "Suitable for use within Closet Storage Spaces"		



- > Switches see pages 113 - 116
- > Extension leads see page 127



Power cord with 90° plug, Plastic, black
2 m (78 3/4")

- > Item No. 833.89.017 **SRP \$5.00**



90° Plug adapter, Plastic, black
> Item No. 833.89.018 **SRP \$7.00**

Country-specific 2 m (78 3/4") primary leads

3 m (118")

Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00
Plug design								
Designation	UK	AU	EU	US	JP	CN	US	US
Voltage (V)	250	250	250	120	100	250	120	120