

# LED 3032

FLEXIBLE STRIP LIGHT, MULTI-WHITE



24 V SYSTEM



IP20

- > The perfect light color and brightness can be adjusted via multi-white mixer
- > Dimmable
- > Multi-white mixer can handle up to 60 W; Max. 10 multi-white mixers with 1-10 remote controls within a radius of 15 m (49')
- > Installation only with aluminum profile
- > Degree of Protection: IP20
- > Max. strip light length: 3.927 m (12' 10 5/8")
- > Max. watts per lead: 65




- > Driver see page 88
- > Aluminum profiles see pages 103 - 109

<b>Item No.</b>	<b>833.77.200</b>
<b>SRP</b>	<b>\$230.00</b>
Light Color (K)	2700 (warm white) to 5000 (cool white)
L x W x H	5,000 x 10 x 1.3 mm (196 5/8" x 3/8" x 1/32")
Wattage	65 (13 per meter) (4.0 per foot)
LEDs	840 (2 x 84 per meter) (2 x 26 per foot)
Lumen	6500
Lumen per watt	100
CRI	2700 K: 90; 5000 K: 83
Energy Efficiency class	A+
Weighted energy consumption	14.30 per meter
Material/Finish	Plastic, white
Supplied with	5 meter roll with 2 m (78 3/4") lead
<b>Note</b>	Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"

		120°			
2700 K	5000 K				
1750 lx	1800 lx			250 mm (9 13/16")	
590 lx	600 lx			500 mm (19 11/16")	
195 lx	200 lx			750 mm (29 1/2")	
110 lx	110 lx			1000 mm (39 3/8")	

**Note**  
The chart values apply to a strip light length of 0.5 m (19 11/16")

LED 3032

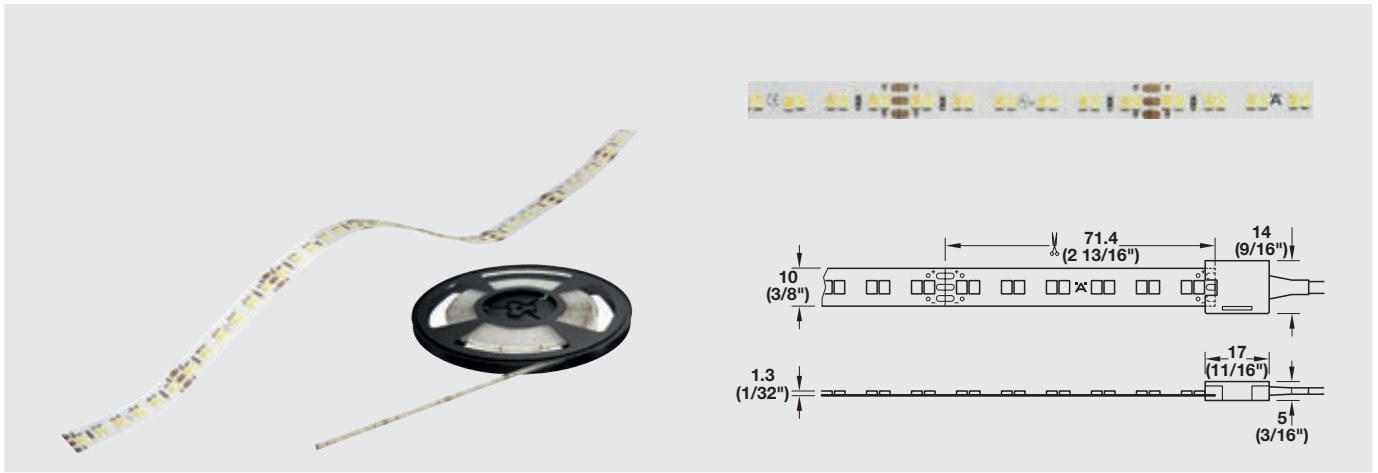



- 


Lead, 3.5 A, with clip  
2000 mm (78 3/4")  
> Item No. 833.77.757 **SRP \$5.00**
- 


Interconnecting lead, 3.5 V, with clip  
50 mm (2")  
> Item No. 833.77.809 **SRP \$4.00**  
500 mm (19 11/16")  
> Item No. 833.77.810 **SRP \$4.00**  
1000 mm (39 3/8")  
> Item No. 833.77.811 **SRP \$6.00**  
2000 mm (78 3/4")  
> Item No. 833.77.812 **SRP \$6.00**
- 

Clip connector, max. 3.5 A  
> Item No. 833.77.776 **SRP \$2.00**

- 

Corner connector, rigid, max. 3.5 A, left and right  
> Item No. 833.77.777 **SRP \$3.00**
- 

Remote control  
> Item No. 833.77.786 **SRP \$40.00**
- 

Multi-white mixer, with 8-way distributor, max. 60 W, Power consumption: 0.6 W  
> Item No. 833.77.787 **SRP \$60.00**
- 

8-way distributor  
> Item No. 833.77.721 **SRP \$12.00**





# LOOX LED DRIVER

CONSTANT VOLTAGE 24 V

24 V SYSTEM

THIN PROFILE

- 1 Item No. 833.77.945  
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 20 \text{ W}$
- 2 Item No. 833.77.947  
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 40 \text{ W}$
- 3 Item No. 833.77.949  
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 90 \text{ W}$   
**max. 84 W per light output**

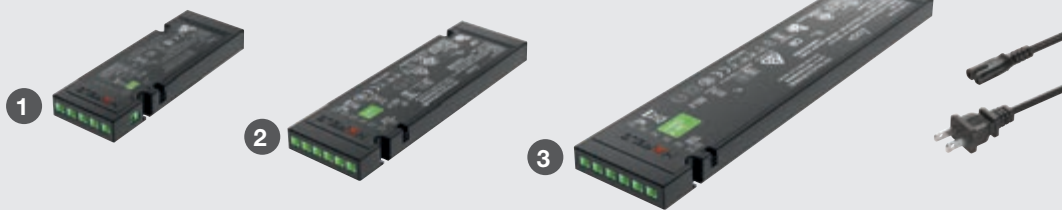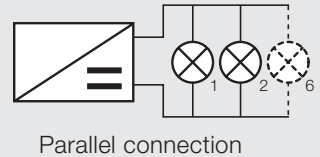

- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches
- > Max. 84 W per light output
- > Lead length from driver to switch: Max. 6 m (236 1/4")

- ! > Class 2
- > Efficiency Level VI
- > Degree of protection : IP20
- > LoOX drivers cannot be controlled by a dimmer wall switch

Item No.	833.77.945 1	833.77.947 2	833.77.949 3
SRP	\$36.00	\$60.00	\$120.00
L x W x H	140 x 50 x 16 (5 1/2" x 2" x 5/8")	190 x 60 x 16 (7 1/2" x 2 3/8" x 5/8")	316 x 70 x 16 (8 3/16" x 2 3/4" x 5/8")
Wattage	0 – 20	0 – 40	0 – 90
Standby Power Consumption Wattage	<0.1	<0.1	<0.2
Input voltage	100 – 240 V~; 50 – 60 Hz		
Output voltage	24 V DC		
Output current	0.83 A	1.67 A	3.75 A
Number of slots	6 for lights, 1 for switch, 1 for power cord		
Material/Finish	Plastic, black		
Supplied with	Mounting accessories, US power cord		
<b>Note</b>	LoOX Lights and Drivers are "Suitable for use within Closet Storage Spaces"		

- ➔ > Switches see pages 113 - 116
- > Extension leads see page 127

- + Power cord with 90° plug, Plastic, black 2 m (78 3/4")  
 > Item No. 833.89.017 **SRP \$5.00**
- 90° Plug adapter, Plastic, black  
 > Item No. 833.89.018 **SRP \$7.00**


Country-specific 2 m (78 3/4") primary leads

	Country-specific 2 m (78 3/4") primary leads								3 m (118")
Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008	
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00	
Plug design									
Designation	UK	AU	EU	US	JP	CN	US	US	
Voltage (V)	250	250	250	120	100	250	120	120	


# ACCESSORIES

## MULTI-WHITE CONTROL

### Multi-White Control 12 V/24 V

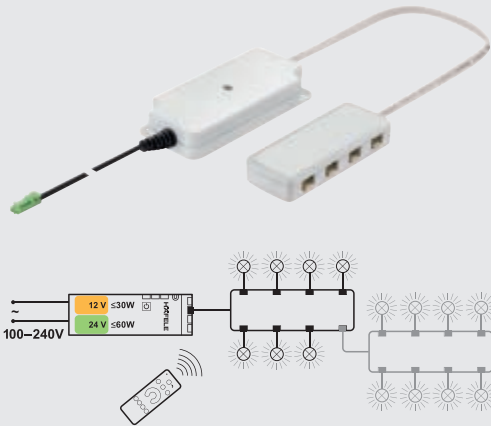


<b>Item No.</b>	<b>833.73.750</b>	<b>833.77.787</b>
<b>SRP</b>	<b>\$60.00</b>	<b>\$60.00</b>
System	12 V	24 V
Wattage	30	60
Power consumption (W)	0.3	0.6
Material/Finish	Plastic, silver colored	



 > Radio frequency 2.4 GHz

### Remote for Multi-White Control 12 V/24 V



<b>Item No.</b>	<b>833.77.786</b>
<b>SRP</b>	<b>\$40.00</b>
Drill hole Ø x Height	40 x 14.4 (1 5/8" x 9/16")
Material/Finish	Plastic, black
Supplied with	Replaceable CR 2032 button cell lithium battery

-  > Exclusively for controlling multi-white lights
- > Color control, dimming (with memory function), storage of 3 lighting scenes
- > Max. 10 multi-white mixers can be controlled with 1–10 remote controls within a radius of 15 m (49')

-   8-way distributor, for multi-white lights  
Plastic, white  
> Item No. 833.77.721  
**SRP \$12.00**
- > Coin battery see page 117