

LED 3038

RECESS/SURFACE MOUNTED LIGHT



24 V SYSTEM



- > *CRI 90 lights are Title 24 Compliant
- > *CRI 90 lights offer more vibrant, true color rendering than lower CRI products
- > Provides excellent color rendering and illumination
- > Dimmable
- > Degree of protection: IP20

Note

For mounting in drilled hole with clip fastener or for screw mounting.




Item No.	833.75.140	833.75.141	833.75.142	833.75.120	833.75.121	833.75.122	833.75.150	833.75.151	833.75.152
SRP	\$20.00	\$20.00	\$20.00	\$20.00	\$20.00	\$20.00	\$20.00	\$20.00	\$20.00
Light Color (K)	3000 (warm white)	4000 (cool white)	5000 (cool white)	3000 (warm white)	4000 (cool white)	5000 (cool white)	3000 (warm white)	4000 (cool white)	5000 (cool white)
Drill hole	Ø55 mm (2 3/16")								
Ø x H	65 x 12 mm (2 9/16" x 1/2")								
Wattage	3								
LEDs	24								
Lumen	215	225	245	215	225	245	215	225	245
Lumen per watt	72	75	82	72	75	82	72	75	82
CRI	90*		83	90*		83	90*		83
Energy Efficiency class	A+								
Weighted energy consumption	3.30								
Material	Steel								
Finish	polished chrome-plated			silver colored			stainless steel colored		
Supplied with	2 m (78 3/4") lead								

Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"

LED 3038



! > Dimmable

➔  > Driver see page 88
 > Drill bit see page 146

+ Surface mounted ring, Steel polished chrome-plated
 > Item No. 833.72.802 **SRP \$4.00** silver colored
 > Item No. 833.72.803 **SRP \$4.00** stainless steel colored
 > Item No. 833.72.804 **SRP \$4.00**





LOOX LED DRIVER

CONSTANT VOLTAGE 24 V

24 V SYSTEM

THIN PROFILE

- 1 Item No. 833.77.945
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 20 \text{ W}$
- 2 Item No. 833.77.947
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 40 \text{ W}$
- 3 Item No. 833.77.949
 $\otimes_1 + \otimes_2 + \dots + \otimes_6 < 90 \text{ W}$
max. 84 W per light output

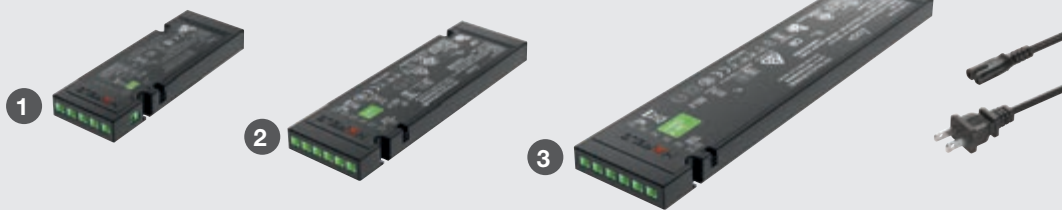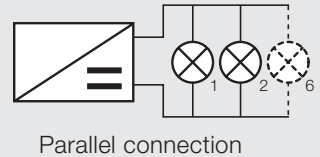

- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches
- > Max. 84 W per light output
- > Lead length from driver to switch: Max. 6 m (236 1/4")

- ! > Class 2
- > Efficiency Level VI
- > Degree of protection : IP20
- > Loox drivers cannot be controlled by a dimmer wall switch

Item No.	833.77.945 1	833.77.947 2	833.77.949 3
SRP	\$36.00	\$60.00	\$120.00
L x W x H	140 x 50 x 16 (5 1/2" x 2" x 5/8")	190 x 60 x 16 (7 1/2" x 2 3/8" x 5/8")	316 x 70 x 16 (8 3/16" x 2 3/4" x 5/8")
Wattage	0 – 20	0 – 40	0 – 90
Standby Power Consumption Wattage	<0.1	<0.1	<0.2
Input voltage	100 – 240 V~; 50 – 60 Hz		
Output voltage	24 V DC		
Output current	0.83 A	1.67 A	3.75 A
Number of slots	6 for lights, 1 for switch, 1 for power cord		
Material/Finish	Plastic, black		
Supplied with	Mounting accessories, US power cord		
Note	Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"		

- ➔ > Switches see pages 113 - 116
- > Extension leads see page 127

- + Power cord with 90° plug, Plastic, black 2 m (78 3/4")
- > Item No. 833.89.017 **SRP \$5.00**
- 90° Plug adapter, Plastic, black
- > Item No. 833.89.018 **SRP \$7.00**

Country-specific 2 m (78 3/4") primary leads

	Country-specific 2 m (78 3/4") primary leads								3 m (118")
Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008	
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00	
Plug design									
Designation	UK	AU	EU	US	JP	CN	US	US	
Voltage (V)	250	250	250	120	100	250	120	120	