

LOOX LED 4004


RECESS MOUNTED LIGHT, ROUND WITH LENS




- > Extremely small and slim design without lack of light intensity
- > Produces a nice wide beam that is not too focused

> Dimmable

> Driver see page 99
 > Drill bit see page 146

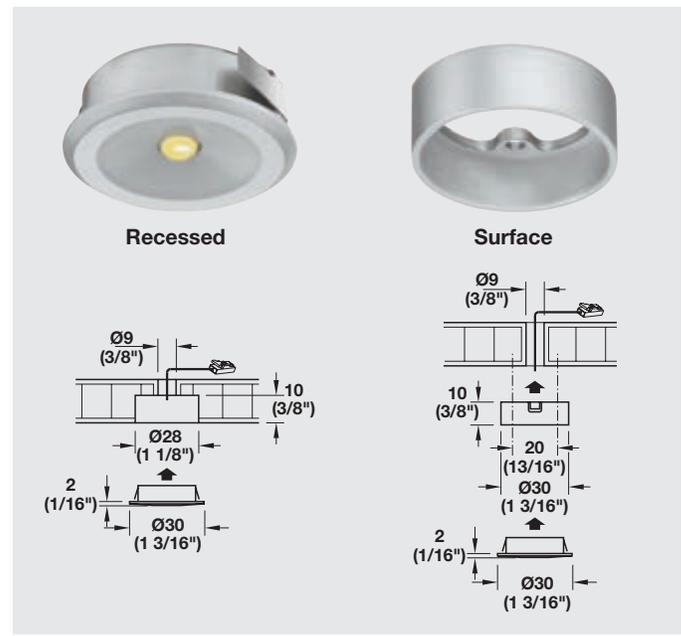

Item No.	833.78.080
SRP	\$16.00
Light Color (K)	3000 (warm white)
Drill hole	Ø28 mm (1 1/8")
Ø x H	30 x 12 mm (1 3/16" x 1/2")
Wattage	1
LEDs	1
Lumen	80
Lumen per watt	80
CRI	80
Energy Efficiency class	A+
Weighted energy consumption	1.10
Material/Finish	Plastic, silver
Supplied with	2 m (78 3/4") lead, surface mount ring

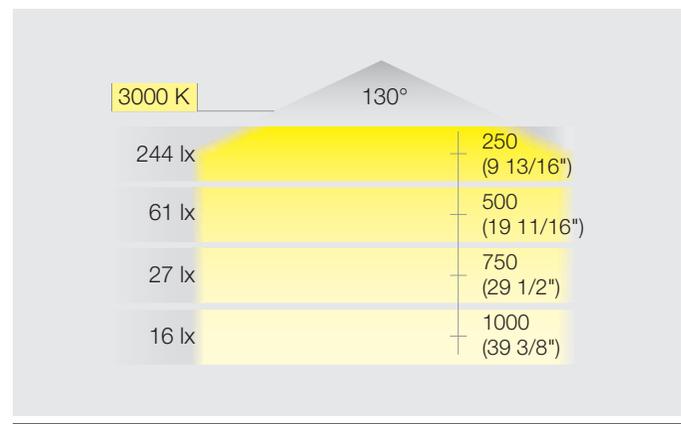


LOOX LED DRIVER

CONSTANT VOLTAGE 350 mA DRIVER



350-mA SYSTEM

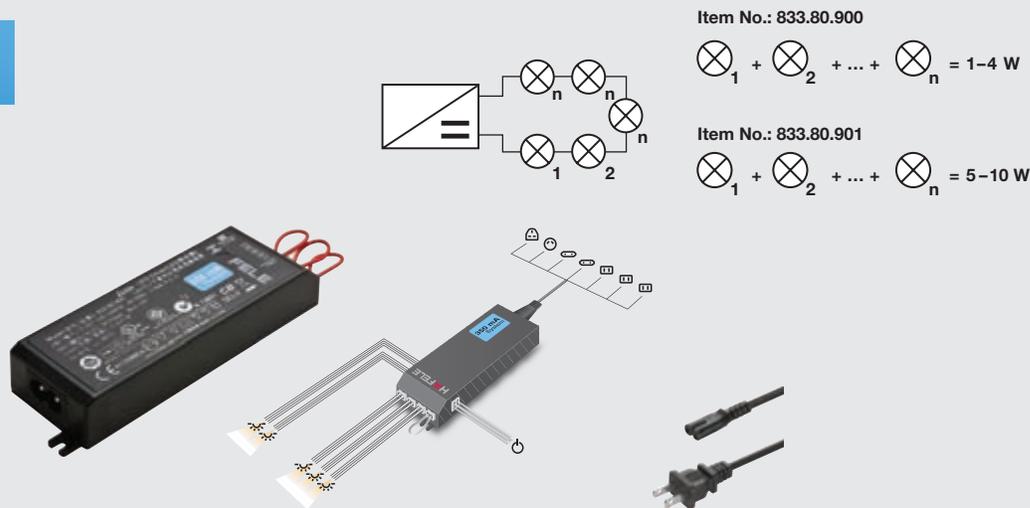

- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches

- ! > Degree of protection : IP20
- > Loox drivers cannot be controlled by a dimmer wall switch
- ➔ > Switches see pages 113 - 116
- > Extension leads see page 127

Item No.	833.80.900	833.80.901
SRP	\$30.00	\$50.00
L x W x H	140 x 43 x 20 (5 1/2" x 1 11/16" x 13/16")	195 x 43 x 28 (7 11/16" x 1 11/16" x 1 1/8")
Wattage	1 – 4	5 – 10
Input voltage	100–240 V; 50–60 Hz	
Output current	350 mA	
Number of slots	4	10
Material/Finish	Plastic, black	
Supplied with	Mounting accessories, US power cord	

- + Power cord with 90° plug
2 m (78 3/4")
> Item No. 833.89.017 **SRP \$5.00**
- 90° Plug adapter
> Item No. 833.89.018 **SRP \$7.00**
- Replacement jumper cable
> Item No. 833.80.720 **SRP \$0.50**

Country-specific 2 m (78 3/4") primary leads								3 m (118")
Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00
Plug design								
Designation	UK	AU	EU	US	JP	CN	US	US
Voltage (V)	250	250	250	120	100	250	120	120