

LOOX LED 4005

RECESS/SURFACE MOUNTED LIGHT, ROUND WITH LENS



350-mA SYSTEM



- > Can be recess or surface mounted
- > Small and flat design easily integrates into furniture designs
- > The light spot decoratively illuminates objects while the integrated lens centers and intensifies the spot




> Dimmable




> Driver see page 99
> Drill bit see page 146



Recessed

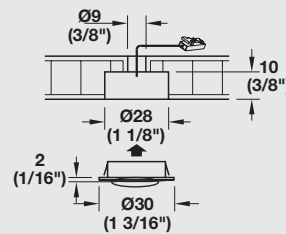

Surface

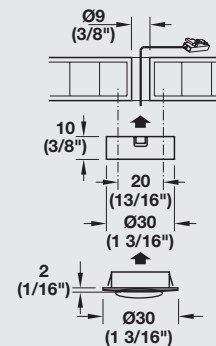

Item No.	833.78.100
SRP	\$16.00
Light Color (K)	3000 (warm white)
Drill hole	Ø28 mm (1 1/8")
Ø x H	30 x 12 mm (1 3/16" x 1/2")
Wattage	1
LEDs	1
Lumen	63
Lumen per watt	63
CRI	80
Energy Efficiency class	A+
Weighted energy consumption	1.10
Material/Finish	Plastic, silver colored anodized
Supplied with	2 m (78 3/4") lead, mounting material

3000 K

45°


444 lx	250 (9 13/16")
111 lx	500 (19 11/16")
49 lx	750 (29 1/2")
28 lx	1000 (39 3/8")

LOOX LED DRIVER

CONSTANT VOLTAGE 350 mA DRIVER



350-mA SYSTEM

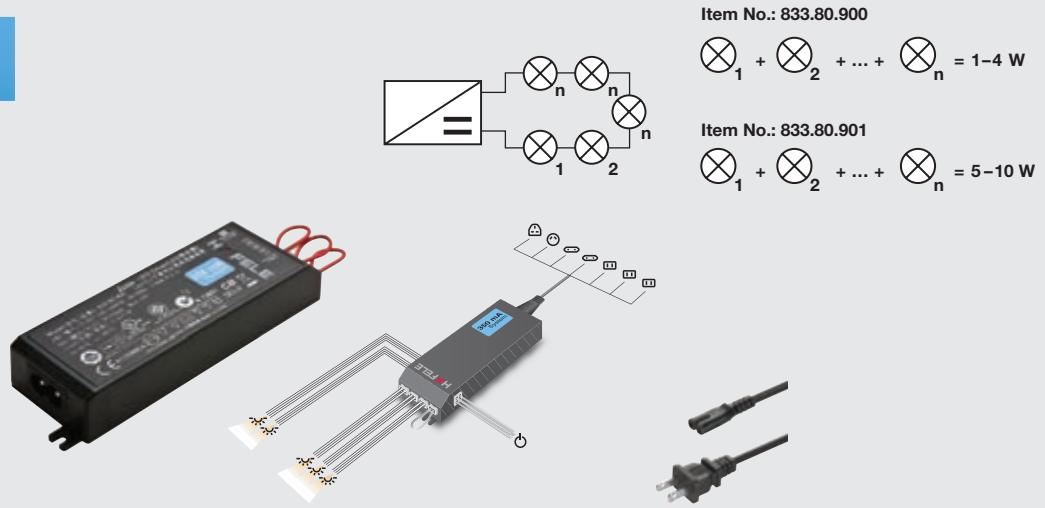

- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches

- > Degree of protection : IP20
- > LoOX drivers cannot be controlled by a dimmer wall switch
- > Switches see pages 113 - 116
- > Extension leads see page 127

- Power cord with 90° plug
2 m (78 3/4")
> Item No. 833.89.017 **SRP \$5.00**
- 90° Plug adapter
> Item No. 833.89.018 **SRP \$7.00**
- Replacement jumper cable
> Item No. 833.80.720 **SRP \$0.50**

Item No.	833.80.900	833.80.901
SRP	\$30.00	\$50.00
L x W x H	140 x 43 x 20 (5 1/2" x 1 11/16" x 13/16")	195 x 43 x 28 (7 11/16" x 1 11/16" x 1 1/8")
Wattage	1 – 4	5 – 10
Input voltage	100–240 V; 50–60 Hz	
Output current	350 mA	
Number of slots	4	10
Material/Finish	Plastic, black	
Supplied with	Mounting accessories, US power cord	

	Country-specific 2 m (78 3/4") primary leads								3 m (118")
Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008	
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00	
Plug design									
Designation	UK	AU	EU	US	JP	CN	US	US	
Voltage (V)	250	250	250	120	100	250	120	120	