

LED 4011

POST LIGHT



350-mA SYSTEM



- > Recess mounted
- > Swiveling light head
- > Height adjustable – bar can be lowered into cabinet
- > Perfect for presentation purposes




> Dimmable



> Driver see page 99

Item No.	833.80.000	833.80.001
SRP	\$60.00	\$60.00
Light Color (K)	4000 (cool white)	6000 (daylight)
Drill hole	Ø10 mm (3/8")	
Ø x L	6 x 370 mm (1/4" x 14 9/16")	
Wattage	1	
LEDs	1	
Lumen	69	97
Lumen per watt	69	97
CRI	80	
Energy Efficiency class	A++	
Weighted energy consumption	1.10	
Material/Finish	Aluminum and Steel, black	
Supplied with	2 m (78 3/4") lead, mounting material	

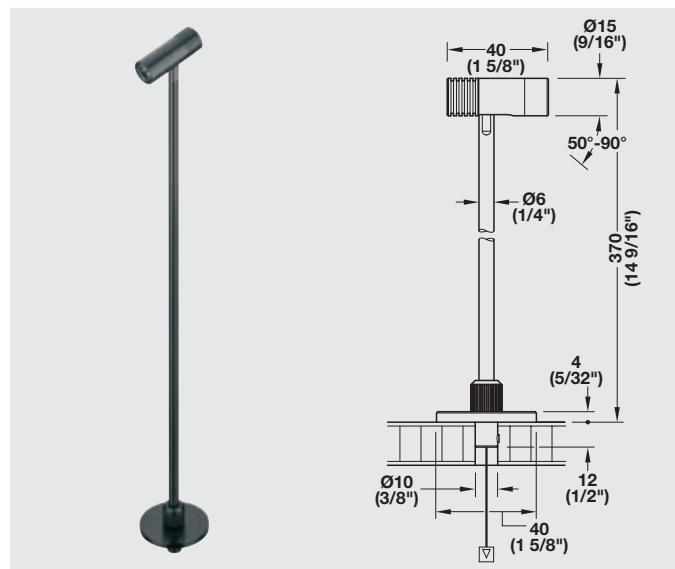


4000 K	6000 K	13°
11250 lx	13070 lx	250 (9 13/16")
2810 lx	3270 lx	500 (19 11/16")
1250 lx	1450 lx	750 (29 1/2")
700 lx	820 lx	1000 (39 3/8")

LOOX LED DRIVER

CONSTANT VOLTAGE 350 mA DRIVER

0 100%

350-mA SYSTEM

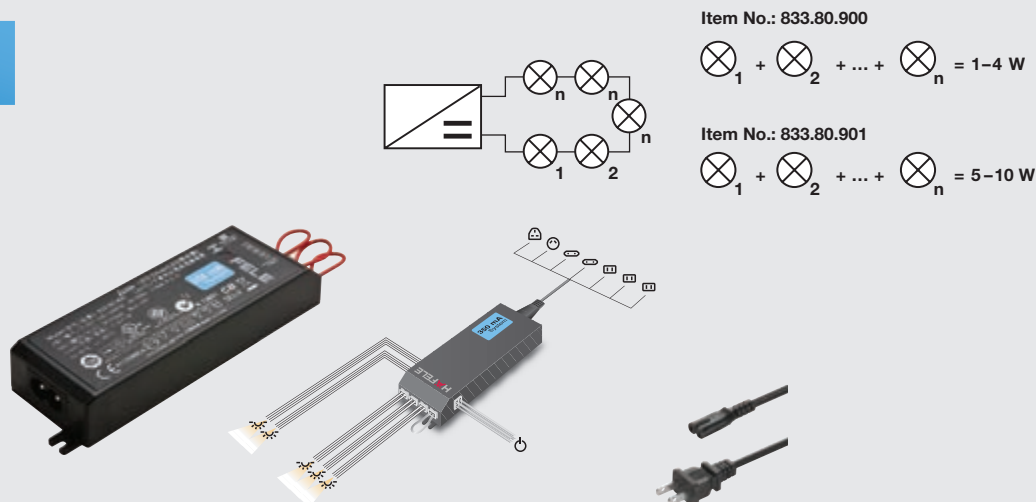

- > Suitable for all of the world's power systems
- > With an integrated port for a wide selection of switches



- > Degree of protection : IP20
- > Loox drivers cannot be controlled by a dimmer wall switch



- > Switches see pages 113 - 116
- > Extension leads see page 127



Power cord with 90° plug
 2 m (78 3/4")
 > Item No. 833.89.017 **SRP \$5.00**



90° Plug adapter
 > Item No. 833.89.018 **SRP \$7.00**

Replacement jumper cable
 > Item No. 833.80.720 **SRP \$0.50**

Item No.	833.80.900	833.80.901
SRP	\$30.00	\$50.00
L x W x H	140 x 43 x 20 (5 1/2" x 1 11/16" x 13/16")	195 x 43 x 28 (7 11/16" x 1 11/16" x 1 1/8")
Wattage	1 - 4	5 - 10
Input voltage	100-240 V; 50-60 Hz	
Output current	350 mA	
Number of slots	4	10
Material/Finish	Plastic, black	
Supplied with	Mounting accessories, US power cord	

Country-specific 2 m (78 3/4") primary leads

Item No.	833.89.000	833.89.001	833.89.002	833.89.003	833.89.016	833.89.005	833.89.050	833.89.008
SRP	\$10.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$4.00	\$6.00
Plug design								
Designation	UK	AU	EU	US	JP	CN	US	US
Voltage (V)	250	250	250	120	100	250	120	120