


# Flexible LED Strip 14.4 Watt / M, IP 65, 24 V

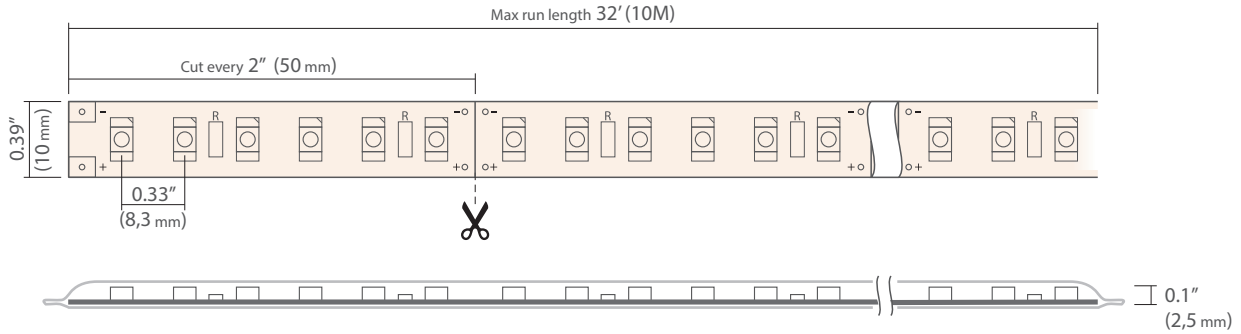

Product code No.	Color Temp.	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
<b>WP-K-27-1275-24V</b>	2700K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1055 L/M 330 L/F	90+	Epistar 2835	120°	24V
<b>WP-K-30-1275-24V</b>	3000K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1055 L/M 330 L/F	90+	Epistar 2835	120°	24V
<b>WP-K-35-1275-24V</b>	3500K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1160 L/M 360 L/F	90+	Epistar 2835	120°	24V
<b>WP-K-40-1275-24V</b>	4000K	14.4 W/M 4.5 W/F	120 LEDs/M 38 LEDs/F	1270 L/M 400 L/F	90+	Epistar 2835	120°	24V

-22°F to 122°F  
OPERATING TEMPERATURE

IP65  
IP

~~LEAD  
MERCURY~~  
CONTENT

24V DC  
POWER OUT

DIMMABLE

OUTDOOR

~~UV  
IR~~  
RADIATION

CE


E

RoHS  
COMPLIANT

## Water and dust resistant – IP 65

Protects against:

- Rain and humidity
- Water splash
- Dust and dirt
- Water jets
- Particles



## Wire options:

36"-72" wire leads (20 gauge jacketed wire)

