


Flexible LED Strip 4.8 Watt / M, IP 65, 24 V

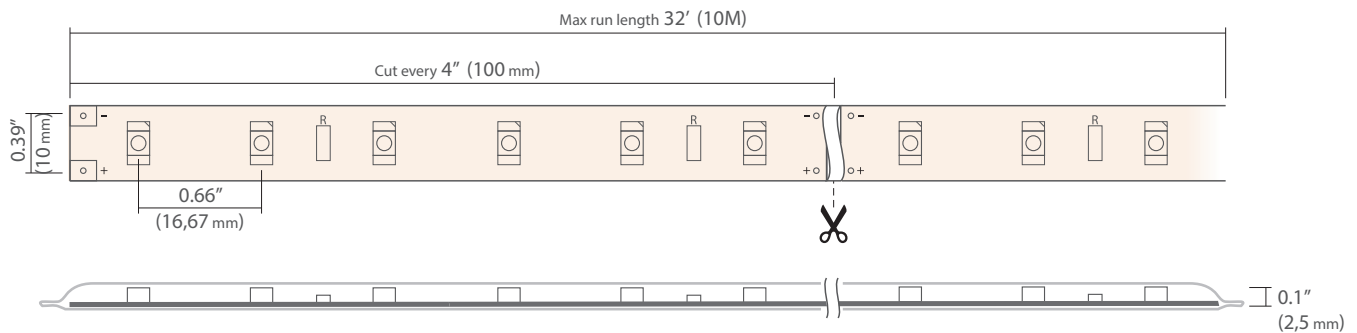

Product code No.	Color Temp.	Watts/ Meter Watts/ Foot	LEDs/ Meter LEDs/ Foot	Lumens / Meter Lumens/ Foot	CRI	LED Chip Type	Beam Angle	Input Voltage
WP-K-27-1210-24V	2700K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	300 L/M 95 L/F	90+	Epistar 3528	140°	24V
WP-K-30-1210-24V	3000K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	320 L/M 100 L/F	90+	Epistar 3528	140°	24V
WP-K-35-1210-24V	3500K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	345 L/M 105 L/F	90+	Epistar 3528	140°	24V
WP-K-40-1210-24V	4000K	4.8 W/M 1.5 W/F	60 LEDs/M 18 LEDs/F	370 L/M 125 L/F	90+	Epistar 3528	140°	24V

-22°F to 122°F
OPERATING TEMPERATURE

IP65
IP

~~LEAD
MERCURY~~
CONTENT

24V DC
POWER OUT

DIMMABLE

OUTDOOR

~~UV
IR~~
RADIATION

CE


E

RoHS
COMPLIANT

Water and dust resistant – IP 65

Protects against:

- Rain and humidity
- Water splash
- Dust and dirt
- Water jets
- Particles



Wire options:

36"-72" wire leads (20 gauge jacketed wire)

