


- UL Listed
- CRI 95
- 2-Step MacAdam's ellipse, single binning
- Only to use with PDS4-PLUS extrusion




TECHNICAL DATA

Model	Chip	IP protection	Power consumption	Color temperature	Lumen output	LED quantity	Input voltage	Beam Angle	Max run length
8K-WP-K-22-1210-24V	Epistar 3528	IP 65 (silicon sleeve)	1.5 W/ft	2200 K	73 lm/ft	18 pcs/ft	24 V	120 °	24'
8K-WP-K-25-1210-24V	Epistar 3528	IP 65 (silicon sleeve)	1.5 W/ft	2500 K	81 lm/ft	18 pcs/ft	24 V	120 °	24'
8K-WP-K-27-1210-24V	Epistar 3528	IP 65 (silicon sleeve)	1.5 W/ft	2700 k	95 lm/ft	18 pcs/ft	24 V	120 °	24'
8K-WP-K-30-1210-24V	Epistar 3528	IP 65 (silicon sleeve)	1.5 W/ft	3000 K	100 lm/ft	18 pcs/ft	24 V	120 °	24'
8K-WP-K-35-1210-24V	Epistar 3528	IP 65 (silicon sleeve)	1.5 W/ft	3500 K	105 lm/ft	18 pcs/ft	24 V	120 °	24'
8K-WP-K-40-1210-24V	Epistar 3528	IP 65 (silicon sleeve)	1.5 W/ft	4000 K	106 lm/ft	18 pcs/ft	24 V	120 °	24'
8K-WP-K-50-1210-24V	Epistar 3528	IP 65 (silicon sleeve)	1.5 W/ft	5000 K	112 lm/ft	18 pcs/ft	24 V	120 °	24'

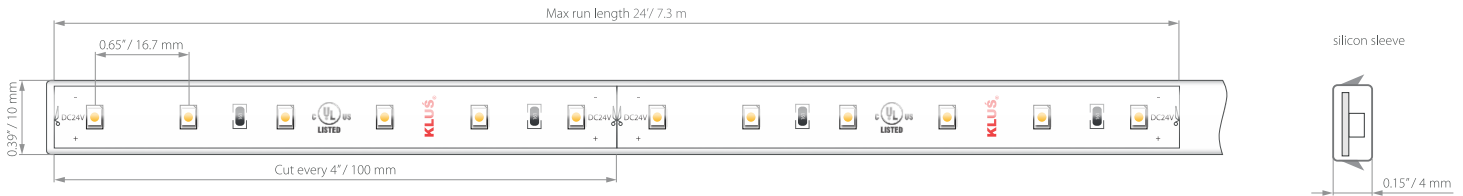

WIRE OPTIONS

36"-72" wire leads (20 gauge jacketed wire)

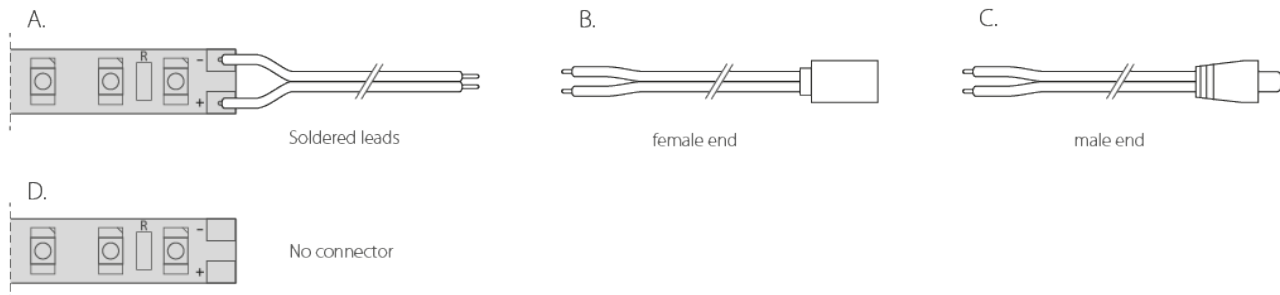

RELATED EXTRUSIONS



PDS-4-PLUS Extrusion
Ref: C1263