


- UL Listed
- CRI 90+
- 3-Step MacAdam's ellipse, single binning
- Only to use with PDS4-PLUS extrusion




TECHNICAL DATA

Model	Chip	IP protection	Power consumption	Color temperature	Lumen output	LED quantity	Input voltage	Beam Angle	Max run length
8K-WP-K-22-1220-24V	Epistar 3528	IP 65 (silicon sleeve)	3 W/ft	2200 K	158 lm/ft	38 pcs/ft	24 V	120 °	32'
8K-WP-K-25-1220-24V	Epistar 3528	IP 65 (silicon sleeve)	3 W/ft	2500 K	189 lm/ft	38 pcs/ft	24 V	120 °	32'
8K-WP-K-27-1220-24V	Epistar 3528	IP 65 (silicon sleeve)	3 W/ft	2700 k	194 lm/ft	38 pcs/ft	24 V	120 °	32'
8K-WP-K-30-1220-24V	Epistar 3528	IP 65 (silicon sleeve)	3 W/ft	3000 K	201 lm/ft	38 pcs/ft	24 V	120 °	32'
8K-WP-K-35-1220-24V	Epistar 3528	IP 65 (silicon sleeve)	3 W/ft	3500 K	209 lm/ft	38 pcs/ft	24 V	120 °	32'
8K-WP-K-40-1220-24V	Epistar 3528	IP 65 (silicon sleeve)	3 W/ft	4000 K	218 lm/ft	38 pcs/ft	24 V	120 °	32'
8K-WP-K-50-1220-24V	Epistar 3528	IP 65 (silicon sleeve)	3 W/ft	5000 K	214 lm/ft	38 pcs/ft	24 V	120 °	32'

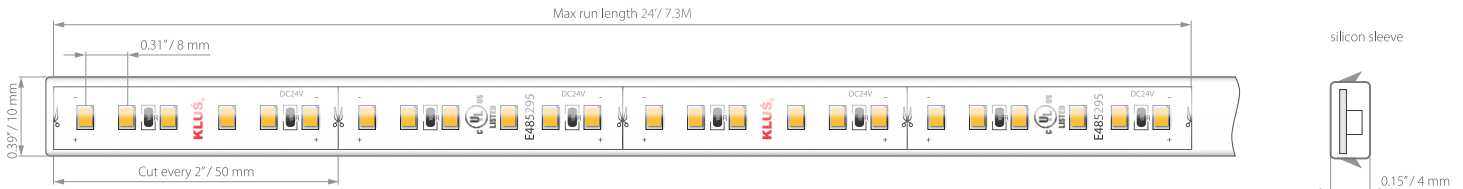


WIRE OPTIONS


36"-72" wire leads (20 gauge Jacketed wire)

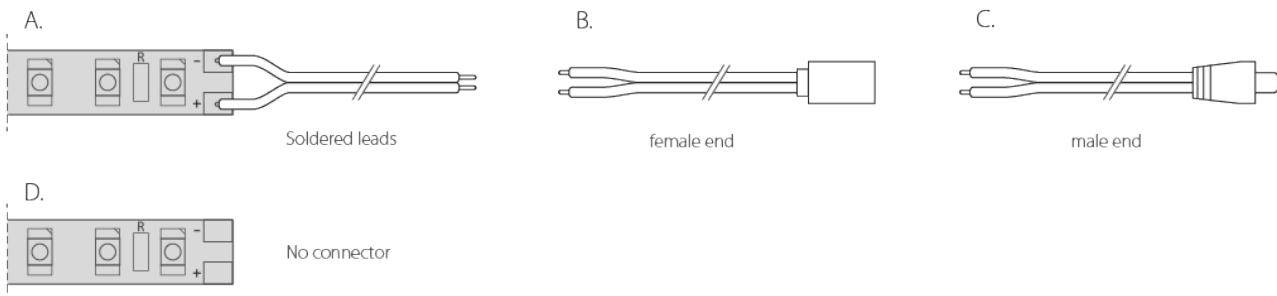

RELATED EXTRUSIONS



WERKIN Extrusion
Ref: 18025ANODA



PDS-4-PLUS Extrusion
Ref: C1263