


PrimaVolt® No Minimum Load Dimmable Drivers w/Junction Box



- Short circuit and over current protection
- Air-cooled for long life operation
- Compatible with leading edge and trailing edge TRIAC dimmers [see Dimmer Compatibility sheet for a full list of tested dimmers]
- Wide-range compatibility, flicker-free dimming

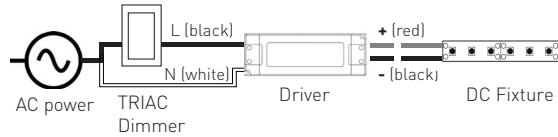

Item #	AL-98-03-24200-NM	
Output	DC Voltage	24V DC
	Voltage Accuracy	±0.5V
	Rated current	8.33A
	Rated power	200W
	Minimum Load	0%
	Maximum Load	100%
Input	Voltage Range	90~135V AC/180~240V AC
	Frequency Range	47~63HZ
	Power Factor (Avg.)	≥0.73/110V ; ≥0.76/220V
	Full Load Efficiency (Avg.)	>86% (24V DC)
	AC Current (Avg.)	1.76A
	Leakage Current	<0.70mA/110VAC, <0.65mA/220VAC
Protection	Short Circuit	Short circuit protection and autorecovery
	Over Voltage	≤140V AC (90~135V) , ≤270V AC (170~265V)
Environment	Working Temp. / Humidity	-40~+60°C / -40~+140°F / 20~90%RH
	Storage Temp. Humidity	-40~+80°C, -40~176°F / 10~95%RH
Safety & EMC	Safety Standards	EN61347-1 EN61347-2-13
	Withstand Voltage	I/P-O/P: 3.75KV AC I/P-FG: 1.88KV AC O/P-FG: 0.5K VAC
	Isolation Resistance	I/P-O/P: 100MΩ/500V DC/25°C, 77°F/70%RH
	EMC Emission	Compliance to EN55015, EN61000-3-2 (≥50% load)
Other	Warranty	3 Year Limited
	Size	8.92" L x 3.05" W x 1.85" H

All parameters NOT specially mentioned are measured at 110V / 220V AC input, rated load, and 25°C, 77°F of ambient temperature.