


PrimaVolt™ Dimmable Drivers



- Compatible with leading edge and trailing edge TRIAC dimmers
- Short circuit and over current protection
- Dry location only (IP40)
- Air-cooled for long life operation
- Wide-range compatibility, flicker-free dimming

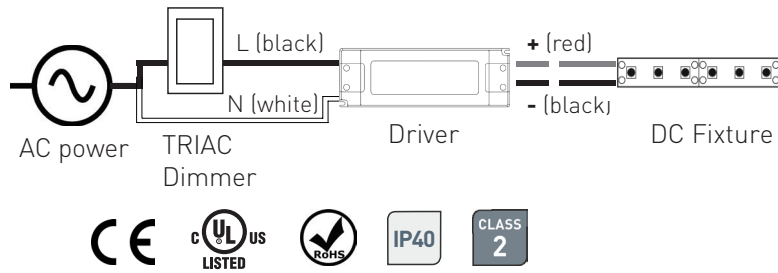

Item #		AL-98-03-12012	AL-98-03-24012
Output	DC Voltage	12V DC	24V DC
	Voltage Accuracy	±5%	±5%
	Rated current	1A	0.5A
	Rated power	12W	12W
	Minimum Load	0% (on/off switch) / 60% (w/dimmer)	0% (on/off switch) / 60% (w/dimmer)
Input	Voltage Range	90-135V AC / 170-250V AC	
	Frequency Range	47-63HZ	
	Power Factor (Avg.)	PF≥0.92/110V ; PF≥0.94/220V ; PF≥0.95/250V	
	Full Load Efficiency (Avg.)	>81% (12V DC)	>82% (24V DC)
	AC Current (Avg.)	0.17A/110V AC — 0.15A/170V AC — 0.12A/220V AC — 0.1A/265V AC	
	Leakage Current	<0.8mA/110V AC, <0.7mA/220V AC	
Protection	Short Circuit	Short circuit protection and autorecovery	
	Over Current	1.4 times output current	
Environment	Working Temp. / Humidity	-40~+60°C / -40~+140°F / 20~90%RH, non-condensing	
	Storage Temp. Humidity	-40~+80°C, -40~176°F / 10~95%RH	
Safety & EMC	Safety Standards	EN-60950-1, EN-61347-1/-2/-13	
	Withstand Voltage	I/P-O/P: 3.75KV AC	
	Isolation Resistance	I/P-O/P: 100MΩ/500V DC/25°C, 77°F/70%RH	
	EMC Emission	Compliance to EN55015, EN61000-3-2 (≥50% load)	
	EMC Immunity	Compliance to EN61000-4-2, 3, 4, 5, 6, 11, EN61547, a light industry level	
Other	Warranty	3 Year Limited	
	Size	5.52"L x 1.78"W x 1.11"H	

All parameters NOT specially mentioned are measured at 110V, 230V AC input, rated load, and 25°C of ambient temperature.