



diodeled®

# 2021

LED LIGHTING  
SOLUTIONS



MADE IN THE USA



MADE IN USA  
WITH FOREIGN PARTS

We engineer and assemble LED Lighting products in the USA at our manufacturing Facility in Reno, Nevada. By taking advantage of our extensive component inventory, we can produce factory-assembled orders with state-of-the-art equipment and a skilled workforce. Matched with strict quality control measures, we build with experience and deliver quickly from our on-site distribution team.

MADE IN USA

AlphaTECH® Encapsulated Linear LED Lighting  
LED Light Guide Panels

ASSEMBLED IN USA

Factory Assembled Fixtures with Channels

HYDROLUME® SLIM Strip Light

INFINILINE® 120V Linear Light

Factory Assembled Tape Light

NEON BLAZE™ LED Lighting

Driver Junction Box Combos

MANUFACTURING & OPERATIONS FACILITY LOCATED IN RENO, NV



CERTIFICATIONS & COMPLIANCE



Title 24, Part 6  
2019 building energy efficiency standards for residential and non-residential buildings.

JA8

Provides qualification requirements for high efficacy light sources certified by the Energy Commission. Qualification requirements include: Luminous Efficacy, Color Characteristics, Life Testing, and Power Factor, among others.

JA10

Quantifies flicker from lighting systems by measuring the fluctuation of light from lighting systems. Tested with a driver, light source, and dimmer at various frequencies dimmed down to certain levels.



Complete Product Line at  
[www.DiodeLED.com](http://www.DiodeLED.com)

This catalog features the latest and most popular products available from Diode LED, but there is so much more. Visit us online and get access to everything we have available for every lighting application.

TABLE OF CONTENTS

<b>Linear LED Lighting</b>		DAZZLE® 24 RGB Color Changing LED Tape Light	38	REFLECTOR	51
Linear Lighting Comparison Charts	4	Connectors	40	90° SIDEVIEW	51
VALENT® X Tight-Pitch LED Tape Light	10	<b>Aluminum Channel Profiles</b>		WAVEFORM	51
VALENT® X Tight-Pitch Wet Location LED Strip Light	12	Factory Assembly	42	MUD-IN 1 in.	52
BLAZE™ X LED Tape Light	14	Tape Light Channel Compatibility Chart	44	MUD-IN 2 in.	52
BLAZE™ X Wet Location LED Strip Light	16	SLIM	45	<b>Specialty Lighting</b>	
BLAZE™ LED Tape Light	18	CANAL	45	LED Light Guide Panels	54
BLAZE™ WET Location LED Strip Light	20	SQUARE	45	GRAZE™ X Fixture	56
INFINILINE® Driverless 120VAC LED Strip Light	22	DUO	46	<b>Switches &amp; Dimmers</b>	
ALPHATECH® X Linear LED Lighting	24	ROD	46	Color Controllers	58
STREAMLITE™ Diffused COB Linear Light	26	GRAZER Narrow	47	REIGN® Low Voltage LED Dimmer	59
HYDROLUME® SLIM LED Strip Light	28	45°	47	<b>Power Supplies</b>	
NEON BLAZE™ Linear Light	30	16mm	47	OMNIDRIVE® X Electronic Dimmable Drivers	60
BLAZE™ SELECT Tunable White LIGHT SYSTEM	34	SCONCE	48	Magnetic Dimmable Drivers	62
DAZZLE® 24 RGBW 4D QUAD-CHIP LED Tape Light	36	10mm SQUARE Corner	48	MikroDIM™ Electronic Dimmable Driver	64
		20mm SQUARE Corner	48	SWITCHEX® Driver + Dimmer Switch	66
		45° DECO	49	<b>SKU INDEX</b>	
		10mm ROUNDED Corner	49		<b>68</b>
		20mm ROUNDED Corner	49		
		SLIM Recessed	50		
		RECESSED	50		
		S1	50		

# QUICK START GUIDE TO diodeled®

## 1 PICK YOUR LIGHT

24V BLAZE™ 100  
for **ACCENT LIGHTING**  
≤ 55 ft. tape light run per 100W driver



24V BLAZE™ 200  
for **TASK LIGHTING**  
≤ 40 ft. tape light run per 100W driver

24V BLAZE™ 300  
for **COVE LIGHTING**  
≤ 22 ft. tape light run per 100W driver



See pages 18-19 for more details

## 2 PICK YOUR CONNECTOR

TAPE LIGHT TERMINAL  
BLOCK CONNECTOR

TAPE TO WIRE

Screw onto tape light; connect to 18 AWG  
Options: Connector only; 60" lead wire with  
connector

See page 40 for complete options



TAPE TO TAPE

Screw onto tape light

Options: Connector only; 6" jumper;  
60" jumper

See page 40 for complete options



## 3 PICK YOUR DRIVER

DI-MLV (Magnetic)  
Default

See pages 62-63 for  
more details




OMNIDRIVE® X (Electronic/0-10V)



See pages 60-61 for more details

SWITCHEX®  
DIMMER+DRIVER IN ONE

2 in 1 for faster install

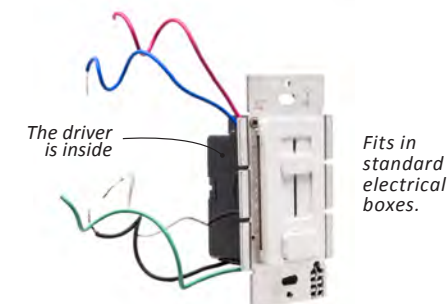

See pages 66-67 for more details


## 4 CHANNEL Optional

CANAL




See page 45 for more details

SLIM

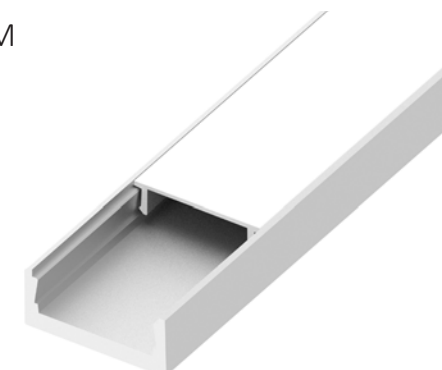

See page 45 for more details

16 mm

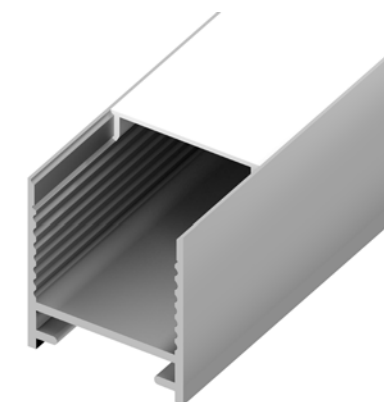

See page 47 for more details




Credit: Integrity Design Services / Designer: Mark Hernbroth



X-RANGE™

The precision engineered **BLAZE X** and **Valent X** are the newly enhanced LED tape light, leading the industry in lighting performance and quality.

- 12-Year warranty
- 95+ CRI/ 90+ R9
- Longer lifetime of consistent color fidelity
- Lumen range 100–800
- Spec-Ready

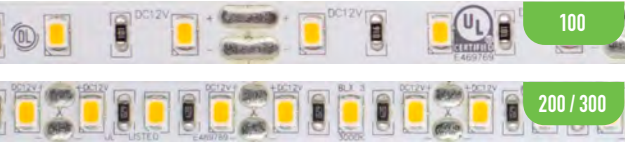

BLAZE™ X LED Tape Light Page 14

100 LUMEN RANGE	12VDC	24VDC
	Max. Run: 37 ft. Cut Points: 2 in. Wattage: 1.54W/ft.	Max. Run: 70 ft. Cut Points: 4 in. Wattage: 1.54W/ft.
CCT	LUMENS / FT.	LUMENS / FT.
2000K	–	92
2400K	110	114
2700K	109	112
3000K	122	126
3500K	126	131
4200K	127	133
5000K	128	135
6300K	121	123

200 LUMEN RANGE	12VDC	24VDC
	Max. Run: 22 ft. Cut Points: 1 in. Wattage: 3.1W/ft.	Max. Run: 45 ft. Cut Points: 2 in. Wattage: 3.1W/ft.
CCT	LUMENS / FT.	LUMENS / FT.
2000K	–	181
2400K	225	226
2700K	221	224
3000K	247	253
3500K	241	254
4200K	254	264
5000K	262	264
6300K	273	276

300 LUMEN RANGE	12VDC	24VDC
	Max. Run: 20 ft. Cut Points: 1 in. Wattage: 4.3W/ft.	Max. Run: 40 ft. Cut Points: 2 in. Wattage: 4.3W/ft.
CCT	LUMENS / FT.	LUMENS / FT.
2000K	–	261
2400K	318	322
2700K	305	318
3000K	339	360
3500K	352	357
4200K	349	365
5000K	358	378
6300K	380	393



BLAZE™ X Wet Location LED Tape Light

Page 16



100 LUMEN RANGE	12VDC	24VDC
	Max. Run: 37 ft. Cut Points: 2 in. Wattage: 1.54W/ft.	Max. Run: 70 ft. Cut Points: 4 in. Wattage: 1.54W/ft.
CCT	LUMENS / FT.	LUMENS / FT.
2400K	99	103
2700K	101	108
3000K	110	117
3500K	109	116

200 LUMEN RANGE	12VDC	24VDC
	Max. Run: 22 ft. Cut Points: 1 in. Wattage: 3.1W/ft.	Max. Run: 45 ft. Cut Points: 2 in. Wattage: 3.1W/ft.
CCT	LUMENS / FT.	LUMENS / FT.
2400K	203	204
2700K	199	212
3000K	211	226
3500K	217	235

300 LUMEN RANGE	12VDC	24VDC
	Max. Run: 20 ft. Cut Points: 1 in. Wattage: 4.3W/ft.	Max. Run: 40 ft. Cut Points: 2 in. Wattage: 4.3W/ft.
CCT	LUMENS / FT.	LUMENS / FT.
2400K	290	285
2700K	277	304
3000K	310	321
3500K	308	320

X-RANGE™



VALENT® X LED Tape Light

Page 10

100 LUMEN RANGE	24VDC
	Max. Run: 80 ft. Cut Points: 1.32 in. Wattage: 1.0W/ft.
CCT	LUMENS / FT.
2400K	104
2700K	101
3000K	106
3500K	108
4200K	112
5000K	116
6300K	112

200 LUMEN RANGE	24VDC
	Max. Run: 53 ft. Cut Points: 1.32 in. Wattage: 1.9W/ft.
CCT	LUMENS / FT.
2400K	194
2700K	207
3000K	218
3500K	218
4200K	228
5000K	242
6300K	244

300 LUMEN RANGE	24VDC
	Max. Run: 41 ft. Cut Points: 1.32 in. Wattage: 2.8W/ft.
CCT	LUMENS / FT.
2400K	299
2700K	311
3000K	323
3500K	328
4200K	342
5000K	365
6300K	363

- Tight-pitch LEDs
- 95+ CRI/ 95 R9
- High output lumen range

500 LUMEN RANGE	24VDC
	Max. Run: 30 ft. Cut Points: 1.32 in. Wattage: 4.6W/ft.
CCT	LUMENS / FT.
2400K	469
2700K	495
3000K	557
3500K	586
4200K	550
5000K	592
6300K	578

800 LUMEN RANGE	24VDC
	Max. Run: 19 ft. Cut Points: 1.32 in. Wattage: 7.2W/ft.
CCT	LUMENS / FT.
2400K	730
2700K	782
3000K	853
3500K	906
4200K	850
5000K	840
6300K	924

VALENT® X Wet Location LED Tape Light

Page 12



500 LUMEN RANGE	24VDC
	Max. Run: 30 ft. Cut Points: 1.32 in. Wattage: 4.6W/ft.
CCT	LUMENS / FT.
2400K	466
2700K	437
3000K	469
3500K	492






LINEAR LED LIGHTING COMPARISON CHART

BLAZE™

The new value engineered tape light leveraging the advances in efficient, cleaner technology, newer circuit design, streamlined manufacturing, and economies of scale.

- 7-Year warranty
- 90+ CRI
- General lighting
- Competitively priced

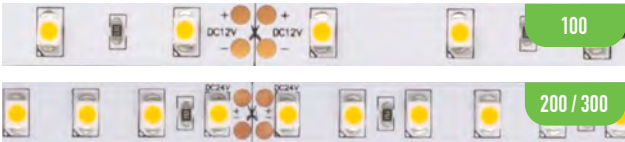

BLAZE™ LED Tape Light  
Page 18

100 LUMEN RANGE	12VDC	24VDC
	Max. Run: 27 ft. Cut Points: 2 in. Wattage: 1.46W/ft.	Max. Run: 55 ft. Cut Points: 4 in. Wattage: 1.46W/ft.
CCT	LUMENS / FT.	LUMENS / FT.
2700K	117	113
3000K	121	117
3500K	117	126
4200K	131	133
5000K	130	132
6300K	121	123

200 LUMEN RANGE	12VDC	24VDC
	Max. Run: 20 ft. Cut Points: 1 in. Wattage: 2.93W/ft.	Max. Run: 40 ft. Cut Points: 2 in. Wattage: 2.93W/ft.
CCT	LUMENS / FT.	LUMENS / FT.
2700K	212	233
3000K	221	237
3500K	236	249
4200K	252	265
5000K	256	261
6300K	272	266

300 LUMEN RANGE	24VDC
	Max. Run: 22 ft. Cut Points: 2 in. Wattage: 4.5W/ft.
CCT	LUMENS / FT.
2000K	290
2700K	338
3000K	344
3500K	329
4200K	344
5000K	338
6300K	341

BLAZE™ Wet Location  
LED Strip Light  
Page 20



100 LUMEN RANGE	12VDC	24VDC
	Max. Run: 27 ft. Cut Points: 2 in. Wattage: 1.46W/ft.	Max. Run: 55 ft. Cut Points: 4 in. Wattage: 1.46W/ft.
CCT	LUMENS / FT.	LUMENS / FT.
2700K	107	106
3000K	116	114
5000K	116	114

200 LUMEN RANGE	12VDC	24VDC
	Max. Run: 20 ft. Cut Points: 1 in. Wattage: 2.93W/ft.	Max. Run: 40 ft. Cut Points: 2 in. Wattage: 2.93W/ft.
CCT	LUMENS / FT.	LUMENS / FT.
2700K	206	209
3000K	221	226
5000K	227	224

300 LUMEN RANGE	24VDC
	Max. Run: 22 ft. Cut Points: 2 in. Wattage: 4.5W/ft.
CCT	LUMENS / FT.
2700K	331
3000K	337
5000K	329
6300K	335

LINEAR LED LIGHTING COMPARISON CHART

BLAZE™



BLAZE™ COLORS LED Tape Light  
Page 18

Bright and vibrant, solid color LED light lighting.

12VDC		24VDC
Max. Run: 20 ft. Cut Points: 1 in. Wattage: 3.0/ft.		Max. Run: 40 ft. Cut Points: 2 in. Wattage: 3.0/ft.
CCT	LUMENS / FT.	LUMENS / FT.
Red	95	98
Green	300	310
Blue	75	71

SPECIALTY LIGHTING



STREAMLITE™ DIFFUSED COB  
LED Tape Light  
Page 26



Low profile COB linear lighting, featuring uniform illumination without the need for diffusion covers.

ALPHATECH® X  
LINEAR LED LIGHTING  
Page 24

Elegant, diffused lighting for outdoor applications exposed to sunlight (UV), saltwater, heat, chemicals, and other environmental extremes

100 LUMEN RANGE TOP BEND	24VDC
	Max. Run: 16 ft. Wattage: 6.2W/ft.
CCT	LUMENS / FT.
RGBW	122

250 LUMEN RANGE TOP BEND	24VDC
	Max. Run: 16 ft. Wattage: 5.6W/ft.
CCT	LUMENS / FT.
2400K	248
2700K	266
3000K	314

400 LUMEN RANGE TOP BEND	24VDC
	Max. Run: 16 ft. Wattage: 4.6W/ft.
CCT	LUMENS / FT.
2400K	380
2700K	409
3000K	393

INDOOR -IP20	WET LOCATION -IP65	
	12VDC	24VDC
	Max. Run: 16.4 ft. Cut Points: 2.5 in. Wattage: 3.3W/ft.	Max. Run: 16.4 ft. Cut Points: 2.5 in. Wattage: 3.3W/ft.
CCT	LUMENS / FT.	LUMENS / FT.
2700K	288	221
3000K	292	256
4000K	323	271
Red	42	38
Green	236	205

LINEAR LED LIGHTING COMPARISON CHART



Our patented INFINILINE LED Strip Light is a complete and robust solution for large-scale and commercial applications. *Plug-in or hard-wired connections available.*

INFINILINE® 120V LED Strip Light	
Page 28	
Value engineered for ambient or accent lighting.	
Voltage: 120VAC Max Run: 164 ft Wattage: 3.7W/ft. Length Increments: Every 7.87 in. CRI: 90+	
LUMENS / FT.	
2700K	289
3000K	300
3500K	308
4200K	351



**HYDROLUME® SLIM LED Strip Light**  
Page 28  
HYDROLUME® SLIM and SLIM HD LED Strip Light are the ultimate lighting solution for harsh environments. IP65 or IP68 options (UL 676 pool rated).

CCT	HYDROLUME® SLIM		HYDROLUME® SLIM HD	
	24VDC Max. Run: 65 ft. Cut Points: 9.84 in. Wattage: 1.22W/ft.		24VDC Max. Run: 32 ft. Cut Points: 6.88 in. Wattage: 2.44W/ft.	
2700K	113		226	
3000K	113		226	
4000K	122		244	
6500K	122		244	
RGB			Wattage: 3W/ft. Max Run: 26 ft. Factory Custom Lengths Only	

LINEAR LED LIGHTING COMPARISON CHART

NEON BLAZE™ LED Linear Light



Page 30  
Bring the ultimate accent lighting into your project. With Zero Line Diffusion™ technology, you get complete color saturation from end to end.

TOP BENDING			SIDE BENDING			
						
CCT	24VDC Max Run: 65 ft. Wattage Power: 1.22W/ft.	24VDC Max Run: 32 ft. Wattage Power: 2.44W/ft.	24VDC Max Run: 16 ft. Wattage Power: 4.4W/ft.	24VDC Max Run: 65 ft. Wattage Power: 1.22W/ft.	24VDC Max Run: 32 ft. Wattage Power: 2.44W/ft.	24VDC Max Run: 16 ft. Wattage Power: 4.4W/ft.
 2700K	86	173	248	62	134	208
 3000K	102	219	317	65	146	198
 3500K	89	178	273	60	120	195
 6300K	88	174	266	59	116	173
 Green	88	148	151	30	48	78
 Blue	18	30	37	6	12	18
 Pink	39	93	110	17	37	53
 Red	31	61	64	11	21	34
 Gold	70	157	184	31	61	84
 RGB				Max Run: 65.6 ft. Wattage Power: 1.22W / ft. Factory Custom Lengths Only		Max Run: 16.4 ft. Wattage Power: 4.4W / ft. Factory Custom Lengths Only



DAZZLE® Color Changing LED Light

Page 36-39  
Color Changing LED lighting has never been this dependable or easy to install.

DAZZLE® RGB		DAZZLE® RGBW 4D	
 RGB	24VDC	24VDC	
	<b>Max. Run:</b> 16.4 ft. <b>Cut Points:</b> 4 in. <b>Wattage:</b> 4.32W/ft.		
 RGBW		<b>Max. Run:</b> 16.4 ft. <b>Cut Points:</b> 4 in. <b>Wattage:</b> 6.4W/ft.	





ACTUAL SIZE

VALENT® X  
Shake Shack, Fulton Center, NY

# VALENT® X

## TIGHT-PITCH

### LED TAPE LIGHT

New and improved design with optimal performance and now field-cuttable! VALENT X LED Lighting is a linear lighting solution designed and engineered to provide high quality natural LED light with 95+ CRI and high performing R-values that provides precision color rendering.

#### FEATURES & BENEFITS

- Dense LED placement for uninterrupted linear light
- 100, 200, 300, 500, and 800 lumen outputs
- 95+ CRI: Superior color rendering
- New and improved, field cuttable design
- 90+ R9 values color rendering

#### QUICK SPECS

Voltage	24VDC
CRI	95+
Warranty	12-Year Warranty
Dimming	Yes
Environment	Indoor / Damp Location / IP20
Certification	UL Listed 2108

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.



## VALENT® X LED TAPE LIGHT

### SPECIFICATIONS & SKU BUILDER

DI	-	VOLTAGE	-	MODEL	-	CCT	-	LENGTH
DI	-	24V (24VDC)	-	VLX1 (100 Lumen Range)	-	24 (2400K)	-	016 (16.4 ft.) 100 (100 ft.)
				VLX2 (200 Lumen Range)		27 (2700K)		
				VLX3 (300 Lumen Range)		30 (3000K)		
				VLX5 (500 Lumen Range)		35 (3500K)		
				VLX8 (800 Lumen Range)		42 (4200K)		
						50 (5000K)		
						63 (6300K)		


EXAMPLE: 24V VALENT X 800 LUMENS 5000K 16.4 FT. SPOOL

DI	-	24V	-	VLX8	-	50	-	016
DI-24V-VLX8-50-016								


	100 LUMEN RANGE	200 LUMEN RANGE	300 LUMEN RANGE	500 LUMEN RANGE	800 LUMEN RANGE
	- 24V - - VLX1 -	- 24V - - VLX2 -	- 24V - - VLX3 -	- 24V - - VLX5 -	- 24V - - VLX8 -
	Max. Run: 80 ft. Cut Points: 1.32 in. Wattage: 1.0W/ft.	Max. Run: 53 ft. Cut Points: 1.32 in. Wattage: 1.9W/ft.	Max. Run: 41 ft. Cut Points: 1.32 in. Wattage: 2.8W/ft.	Max. Run: 30 ft. Cut Points: 1.32 in. Wattage: 4.6W/ft.	Max. Run: 19 ft. Cut Points: 1.32 in. Wattage: 7.2W/ft.
CCT	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.
2400K	104	194	299	469	730
2700K	101	207	311	495	782
3000K	106	218	323	557	853
3500K	108	218	328	586	906
4200K	112	228	342	550	850
5000K	116	242	365	592	840
6300K	112	244	363	578	924

Other  
Lumen  
Outputs  
available  
upon  
request

FACTORY  
ASSEMBLED  
LIGHTING  
FIXTURES  
Install jobs faster and  
work more efficiently  
with lighting that arrives  
ready to install.  
CALL FOR DETAILS



CONNECTORS  
PAGE 41



CAN BE USED TO COMPLY WITH  
JA8 HIGH EFFICACY LED LIGHTING UNDER  
2019 TITLE 24, PART 6

For a full list of Diode LED products visit the  
CALIFORNIA ENERGY COMMISSION DATABASE  
<https://cacertappliances.energy.ca.gov/Pages/ApplianceSearch.aspx>  
(search for 'DIODE LED' under the 'COMPANY' tab)



ACTUAL SIZE

Echo Electric  
La Vista, NE

# VALENT® X

## WET LOCATION

### TIGHT-PITCH

#### LED TAPE LIGHT

If you need tight-pitch, high lumen lighting for wet locations, VALENT X is the solution. Designed and engineered to provide high quality natural and diffused flexible linear lighting for any project. VALENT X Wet Location has 95+ CRI and high performing R-values that provide precision color rendering, and is suitable for applications that are prone to splashing, spraying, or rain. Field-cutable and available in the Diode LED Tailored Lighting Program.


#### FEATURES & BENEFITS

- Dense LED placement for uninterrupted linear light
- 500 lumen output
- 95+ CRI: Superior color rendering
- New and improved, field cuttable design
- High R9–R13 values
- Ultra high lumen output

#### QUICK SPECS

Voltage	24VDC
CRI	95+
Warranty	12-Year Warranty
Dimmable	Yes
Environment	Outdoor / Wet Location / IP65
Certification	UL Listed 2108

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.



## LINEAR LED LIGHTING



# VALENT® X WET LOCATION LED TAPE LIGHT

## SPECIFICATIONS & SKU BUILDER

DI	-	VOLTAGE	-	MODEL	-	CCT	-	LENGTH
DI	-	24V (24VDC)	-	VLX5 (500 Lumen Range)	-	24 (2400K) 27 (2700K) 30 (3000K) 35 (3500K)	-	W016 (16.4 ft.) W100 (100 ft.)

EXAMPLE: 24V VALENT X 500 LUMENS 3500K WET LOCATION 16.4 FT. SPOOL

DI	-	24V	-	VLX5	-	35	-	W016
DI-24V-VLX5-35-W016								

500  
LUMEN RANGE

- 24V -



- VLX5 -

Max. Run: 30 ft.  
Cut Points: 1.32 in.  
Wattage: 4.6W/ft.

CCT	LUMENS / FT.
2400K	466
2700K	437
3000K	469
3500K	492

FACTORY  
ASSEMBLED  
LIGHTING  
FIXTURES

Install jobs faster and work more efficiently with lighting that arrives ready to install.  
CALL FOR DETAILS



CAN BE USED TO COMPLY WITH  
JAB HIGH EFFICACY LED LIGHTING UNDER  
2019 TITLE 24, PART 6

For a full list of Diode LED products visit the  
**CALIFORNIA ENERGY COMMISSION DATABASE**  
<https://cacertappliances.energy.ca.gov/Pages/ApplianceSearch.aspx>  
(search for 'DIODE LED' under the 'COMPANY' tab)





Broll Wine Tasting Room,  
Murphys, CA



# BLAZE™ X LED TAPE LIGHT

The precision engineered BLAZE X is the enhanced LED tape light, leading the industry in lighting performance and quality. BLAZE X has 95+ CRI and higher R-values that provides precision color rendering, superior long-lasting performance, and all with the Diode LED 12-year warranty. BLAZE X comes in a variety of higher efficiency lumen outputs for any application.

- ### FEATURES & BENEFITS
- 95+ CRI
  - 12V and 24V platforms
  - Heavy-duty copper PCB for long lasting performance
  - 90+ values for R9 color render

### QUICK SPECS

Voltage	12VDC & 24VDC
CRI	95+
Warranty	12-Year Warranty
Dimming	Dimmable
Environment	Indoor / Damp Location / IP20
Certification	UL Listed 2108

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.



## BLAZE™ X LED TAPE LIGHT SPECIFICATIONS & SKU BUILDER

DI	-	VOLTAGE	-	MODEL	-	CCT	-	LENGTH
DI	-	12V (12VDC) 24V (24VDC)	-	BLX1 (100 Lumen Range) BLX2 (200 Lumen Range) BLX3 (300 Lumen Range)	-	20 (2000K)	-	016 (16.4 ft.) 100 (100 ft.)
						24 (2400K)		
						27 (2700K)		
						30 (3000K)		
						35 (3500K)		
						42 (4200K)		
						50 (5000K)		
						63 (6300K)		

EXAMPLE: 24V BLAZE® X 300 LUMENS 5000K 16.4 FT. SPOOL


DI	-	24V	-	BLX3	-	50	-	016
DI-24V-BLX3-50-016								

100 LUMEN RANGE		200 LUMEN RANGE		300 LUMEN RANGE	
- 12V - - BLX1 -	- 24V - - BLX1 -	- 12V - - BLX2 -	- 24V - - BLX2 -	- 12V - - BLX3 -	- 24V - - BLX3 -
Max. Run: 37 ft. Cut Points: 2 in. Wattage: 1.54W/ft.	Max. Run: 70 ft. Cut Points: 4 in. Wattage: 1.54W/ft.	Max. Run: 22 ft. Cut Points: 1 in. Wattage: 3.1W/ft.	Max. Run: 45 ft. Cut Points: 2 in. Wattage: 3.1W/ft.	Max. Run: 20 ft. Cut Points: 1 in. Wattage: 4.3W/ft.	Max. Run: 40 ft. Cut Points: 2 in. Wattage: 4.3W/ft.
CCT	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.
2000K	-	92	-	181	-
2400K	110	114	225	226	318
2700K	109	112	221	224	305
3000K	122	126	247	253	339
3500K	126	131	241	254	352
4200K	127	133	254	264	349
5000K	128	135	262	264	358
6300K	121	123	273	276	380

FACTORY  
ASSEMBLED  
LIGHTING  
FIXTURES

Install jobs faster and work more efficiently with lighting that arrives ready to install.

CALL FOR DETAILS



CONNECTORS  
PAGE 40



CAN BE USED TO COMPLY WITH  
JAB8 HIGH EFFICACY LED LIGHTING UNDER  
2019 TITLE 24, PART 6

For a full list of Diode LED products visit the  
**CALIFORNIA ENERGY COMMISSION DATABASE**  
<https://cacertappliances.energy.ca.gov/Pages/ApplianceSearch.aspx>  
(search for 'DIODE LED' under the 'COMPANY' tab)





# BLAZE™ X

## WET LOCATION


### LED TAPE LIGHT

At the center of this wet location linear lighting is the precision engineered BLAZE X LED light engine. BLAZE X wet location has 95+ CRI and high R-values that provides precision color rendering, and is suitable for applications that are prone to splashing, spraying, or rain. Field-cutttable and available in the Diode LED Tailored Lighting Program.

- #### FEATURES & BENEFITS
- 95+ CRI
  - 12V and 24V platforms
  - Heavy-duty copper PCB for long lasting performance
  - 90+ values for R9 color render

QUICK SPECS	
Voltage	12VDC & 24VDC
CRI	95+
Warranty	12-Year Warranty
Dimming	Yes
Environment	Outdoor / Wet Location / IP65
Certification	UL Listed 2108

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.



## BLAZE® X WET LOCATION LED TAPE LIGHT

### SPECIFICATIONS & SKU BUILDER

DI	-	VOLTAGE	-	MODEL	-	CCT	-	LENGTH
DI	-	12V (12VDC) 24V (24VDC)	-	BLX1 (100 Lumen Range) BLX2 (200 Lumen Range) BLX3 (300 Lumen Range)	-	24 (2400K) 27 (2700K) 30 (3000K) 35 (3500K)	-	W016 (16.4 ft.) W100 (100 ft.)


EXAMPLE: 24V BLAZE X 300 LUMENS 3500K WET LOCATION 16.4 FT. SPOOL

DI	-	24V	-	BLX3	-	35	-	W016
DI-24V-BLX3-35-W016								

100 LUMEN RANGE		200 LUMEN RANGE		300 LUMEN RANGE	
- 12V - - BLX1 -	Max. Run: 37 ft. Cut Points: 2 in. Wattage: 1.54W/ft.	- 24V - - BLX1 -	Max. Run: 70 ft. Cut Points: 4 in. Wattage: 1.54W/ft.	- 12V - - BLX2 -	Max. Run: 22 ft. Cut Points: 1 in. Wattage: 3.1W/ft.
- 24V - - BLX2 -	Max. Run: 45 ft. Cut Points: 2 in. Wattage: 3.1W/ft.	- 12V - - BLX3 -	Max. Run: 20 ft. Cut Points: 1 in. Wattage: 4.3W/ft.	- 24V - - BLX3 -	Max. Run: 40 ft. Cut Points: 2 in. Wattage: 4.3W/ft.
CCT	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.
2400K	99	103	203	204	290
2700K	101	108	199	212	277
3000K	110	117	211	226	310
3500K	109	116	217	235	308

FACTORY  
ASSEMBLED  
LIGHTING  
FIXTURES

Install jobs faster and work more efficiently with lighting that arrives ready to install.  
CALL FOR DETAILS



CAN BE USED TO COMPLY WITH  
JA8 HIGH EFFICACY LED LIGHTING UNDER  
2019 TITLE 24, PART 6

For a full list of Diode LED products visit the  
**CALIFORNIA ENERGY COMMISSION DATABASE**  
<https://cacertappliances.energy.ca.gov/Pages/ApplianceSearch.aspx>  
(search for 'DIODE LED' under the 'COMPANY' tab)





Keri Swanberg, Village Home Stores  
Bettendorf, IA

# BLAZE™ LED TAPE LIGHT

BLAZE™ is the value engineered LED tape light that leverages the advances in efficient, cleaner technology, newer circuit design, streamlined manufacturing, and economies of scale. Featuring 90+ CRI, this enhanced tape light family is backed by a 7-year warranty and the well known service and support of Diode LED at an extremely attractive price point. This low voltage LED lighting for indoor task and display lighting is built on the same dependable LED tape and strip light design you are used to from Diode LED.

### FEATURES & BENEFITS

- Cost-effective, high quality tape light
- Ideal for cabinetry, toe kicks, coves, and shelving
- Compatible with all Diode LED tape light accessories including CHROMAPATH® Channels, SWITCHEX®, OMNIDRIVE®, and many more

### QUICK SPECS

Voltage	12VDC & 24VDC
CRI	90+
Warranty	7-Year Warranty 12-Year Warranty (Colors)
Dimming	Dimmable
Environment	Indoor / Damp Location / IP20
Certification	UL Listed 2108

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.

12VDC

24VDC

90+  
CRI

DIMMABLE

UL  
CERTIFIED  
SAFETY

UL Listed  
Field  
Cutttable

TITLE 24  
CAN BE USED TO COMPLY WITH  
TITLE 24 PART 6  
HIGH EFFICACY LED  
REQUIREMENTS  
JAB-2019-E

## LINEAR LED LIGHTING

BLAZE™

### SPECIFICATIONS & SKU BUILDER

DI	-	VOLTAGE	-	MODEL	LUMEN SERIES	-	CCT	-	LENGTH
DI	-	12V (12VDC) 24V (24VDC)	-	BLBSC	1 (100 Lumen Range) 2 (200 Lumen Range) 3 (300 Lumen Range)	-	27 (2700K)	-	016 (16.4 ft.) 100 (100 ft.) 400 (400 ft.)
							30 (3000K)		
							35 (3500K)		
							42 (4200K)		
							50 (5000K)		
							63 (6300K)		
				BLC	N/A		RD (Red)		016 (16.4 ft.) 100 (100 ft.)
							GN (Green)		
							BL (Blue)		

EXAMPLE: 24V BLAZE™ 100 LUMENS 5000K 100 FT. SPOOL


DI	-	24V	-	BLBSC	1	-	50	-	100
----	---	-----	---	-------	---	---	----	---	-----

DI-24V-BLBSC1-50-100

100 LUMEN RANGE		200 LUMEN RANGE		300 LUMEN RANGE	COLORS	
- 12V - -BLBSC1-	- 24V - -BLBSC1-	- 12V - -BLBSC2-	- 24V - -BLBSC2-	- 24V - -BLBSC3-	- 12V - -BLC-	- 24V - -BLC-
Max. Run: 27 ft. Cut Points: 2 in. Wattage: 1.46W/ft.	Max. Run: 55 ft. Cut Points: 4 in. Wattage: 1.46W/ft.	Max. Run: 20 ft. Cut Points: 1 in. Wattage: 2.93W/ft.	Max. Run: 40 ft. Cut Points: 2 in. Wattage: 2.93W/ft.	Max. Run: 22 ft. Cut Points: 2 in. Wattage: 4.5W/ft.	Max. Run: 20 ft. Cut Points: 1 in. Wattage: 3.0/ft.	Max. Run: 40 ft. Cut Points: 2 in. Wattage: 3.0/ft.
CCT	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.
2000K	-	-	-	290	-	-
2700K	117	113	212	233	338	-
3000K	121	117	221	237	344	-
3500K	117	126	236	249	329	-
4200K	131	133	252	265	344	-
5000K	130	132	256	261	338	-
6300K	121	123	252	266	341	-
Red	-	-	-	-	95	98
Green	-	-	-	-	300	71
Blue	-	-	-	-	75	71

FACTORY  
ASSEMBLED  
LIGHTING  
FIXTURES

Install jobs faster and  
work more efficiently  
with lighting that  
arrives ready to install.  
CALL FOR DETAILS



CONNECTORS  
PAGE 40



TITLE 24  
CAN BE USED TO COMPLY WITH  
TITLE 24 PART 6  
HIGH EFFICACY LED  
REQUIREMENTS  
JAB-2019-E

CAN BE USED TO COMPLY WITH  
JAB HIGH EFFICACY LED LIGHTING UNDER  
2019 TITLE 24, PART 6

For a full list of Diode LED products visit the  
CALIFORNIA ENERGY COMMISSION DATABASE  
<https://cacertappliances.energy.ca.gov/Pages/ApplianceSearch.aspx>  
(search for 'DIODE LED' under the 'COMPANY' tab)



100

200/300

# BLAZE™

## WET LOCATION LED STRIP LIGHT

BLAZE™ Wet Location brings moisture protection to the value engineered LED tape light. Just like standard BASICS, it delivers efficient, new circuit design, streamlined manufacturing, and economies to any scale of project. Featuring 90+ CRI, this enhanced tape light family is backed by a 7-year warranty and the well known service and support of Diode LED at an extremely attractive price point.

### FEATURES & BENEFITS

- Cost-effective
- Ideal for cabinetry, toe kicks, coves, and shelving
- Compatible with Diode LED tape light accessories like SWITCHEX®, OMNIDRIVE®, and much more

### QUICK SPECS

Voltage	12VDC & 24VDC
CRI	90+
Warranty	7-Year Warranty
Dimming	Dimmable
Environment	Outdoor / Wet Location / IP65
Certification	UL Listed 2108

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.



LINEAR LED LIGHTING



BLAZE™ WET LOCATION LED STRIP LIGHT  
SPECIFICATIONS & SKU BUILDER

DI	-	VOLTAGE	-	MODEL	LUMEN SERIES	-	CCT	-	LENGTH
DI	-	12V (12VDC) 24V (24VDC)	-	BLBSC	1 (100 Lumen Range) 2 (200 Lumen Range) 3 (300 Lumen Range)	-	27 (2700K) 30 (3000K) 50 (5000K) 63 (6300K)	-	W016 (16.4 ft.) W100 (100 ft.)


EXAMPLE: 24V BLAZE™ 100 LUMENS 5000K WET LOCATION 100 FT. SPOOL

DI	-	24V	-	BLBSC	1	-	50	-	W100
DI-24V-BLBSC1-50-W100									

100 LUMEN RANGE		200 LUMEN RANGE		300 LUMEN RANGE	
- 12V - - BLBSC1 -	Max. Run: 27 ft. Cut Points: 2 in. Wattage: 1.46W/ft.	- 24V - - BLBSC1 -	Max. Run: 55 ft. Cut Points: 4 in. Wattage: 1.46W/ft.	- 12V - - BLBSC2 -	Max. Run: 20 ft. Cut Points: 1 in. Wattage: 2.93W/ft.
- 24V - - BLBSC2 -	Max. Run: 40 ft. Cut Points: 2 in. Wattage: 2.93W/ft.	- 24V - - BLBSC3 -	Max. Run: 22 ft. Cut Points: 2 in. Wattage: 4.5W/ft.		
CCT	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.
2700K	107	106	206	209	331
3000K	116	114	221	226	337
5000K	116	114	227	224	329
6300K	-	-	-	-	335

FACTORY  
ASSEMBLED  
LIGHTING  
FIXTURES

Install jobs faster and work more efficiently with lighting that arrives ready to install.  
CALL FOR DETAILS



TITLE 24

CAN BE USED TO COMPLY WITH TITLE 24 PART 6 HIGH EFFICACY LED REQUIREMENTS JAB-2019-E

CAN BE USED TO COMPLY WITH  
JAB HIGH EFFICACY LED LIGHTING UNDER  
2019 TITLE 24, PART 6

For a full list of Diode LED products visit the  
**CALIFORNIA ENERGY COMMISSION DATABASE**  
<https://cacertappliances.energy.ca.gov/Pages/ApplianceSearch.aspx>  
(search for 'DIODE LED' under the 'COMPANY' tab)





ACTUAL SIZE

Liberty Lighting Group, Inc.  
Union, NJ



### Unparalleled UL Certification & Testing

- UL Listed flexible LED lighting
- Flame test 5VA - fire resistant
- Cold-bend tested - no cracking
- Ball impact tested
- Coil bend tested
- IP65 environmental rating

**80% SAVINGS**  
ON INSTALLATION COST OVER MOST  
LOW-VOLTAGE LIGHTING SOLUTIONS

# INFINILINE®

DRIVERLESS 120VAC  
LINEAR LED LIGHTING

Our patented INFINILINE linear LED lighting is an easy to install and robust solution for large-scale applications. The driverless AC power design brings intuitive and labor saving installation to any continuous indoor/outdoor environment up to 164 feet. INFINILINE is UL Listed to meet updated and new UL standards; making this flexible LED strip light one of the safest and most advanced LED Lighting products on the market.

**PLUG-IN & HARD-WIRED  
CONNECTIONS AVAILABLE**

### FEATURES & BENEFITS

- IP65 & UV Resistant
- Optional Jumpers for tight corners

### QUICK SPECS

Voltage	120VAC
Max. Run	164 ft.
Warranty	5-Year Warranty
Dimming	See specification sheet for dimming recommendations
Environment	Outdoor / Wet Location / IP65
Certification	UL Listed 2388 : Plug-in Installations UL Listed 1598; ETL Certified, CANADA : Hard-Wired Installations

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.



## LINEAR LED LIGHTING

# Designed, Developed, and Patented by Diode LED

- **PLUG-IN OR HARD-WIRED CONNECTION**  
Your choice for easy installation
- **SAFETY AND SECURITY IS #1**  
Safe to the touch and rigorously tested to the latest UL standards
- **PATENTED ON-BOARD RECTIFIER**  
No bulky external transformer or surge protector to get in the way of installation
- **IP65 & UV RESISTANT**  
Backed-up by strict internal development



**Mounting Channel & Adjustable Brackets**  
When ordering INFINILINE, ask about our mounting options for your unique project.

### WHEN YOU ORDER INFINILINE, YOU GET...

- » 5 Year limited warranty for the best high voltage LED Tape light on the market
- » Optional factory-sealed jumpers for safely and easily maneuvering sharp corners
- » Floating stress-relief on all connections for durability & reliability

INFINILINE IS MADE TO ORDER FROM OUR NEVADA OPERATIONS CENTER  
E-MAIL OUR QUOTES DEPARTMENT TODAY - [QUOTES@DIODELED.COM](mailto:QUOTES@DIODELED.COM)



## INFINILINE®

Value engineered for ambient or accent lighting.

Voltage: 120VAC  
Max Run: 164 ft  
Length Increments: Every 8 in.  
Wattage: 3.7W/ft.  
CRI: 90+

CCT*		LUMENS / FT.
	2700K	289
	3000K	300
	3500K	308
	4200K	351

Product specs subject to change. Contact your account manager for current technical/warranty specifications.  
\* CCT range +/- 300K



# ALPHATECH® X

## LINEAR LED LIGHTING

The AlphaTECH series is professional grade, fully diffused linear LED lighting for outdoors and indoors. Made in America\*, AlphaTECH delivers reliably beautiful light in harsh environments including direct sunlight, wet locations, and even submerged in fountains, swimming pools, and saunas. Top and side-bending versions feature seamless end-to-end linkability and multiple mounting options.

AlphaTECH delivers diffused, flawless light with none of the color shifting and tint problems often associated with wet-location linear light. There is no need to sacrifice performance for durability.

\*With foreign components

### FEATURES & BENEFITS

- UL 676 - Pool and spa certified
- NSF component approved
- UV and Chemical resistant, sauna rated
- Lightweight, durable, and flexible
- Fully diffused with end-to-end, seamless light
- Impact resistant

### QUICK SPECS

Voltage	24VDC
CRI	95+
Warranty	5-Year Warranty
Dimming	Dimmable
Environment	Indoor / Outdoor, IP69, Sauna
Certification	UL 2108, UL 676, NSF

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.



# ALPHATECH® X LINEAR LED LIGHTING






## SPECIFICATIONS & SKU BUILDER

DI	-	VOLTAGE	-	BEND STYLE	-	MODEL	-	LUMENS/FT	-	CCT
	DI	24V (24VDC)	-	TE (Top Bend) SE (Side Bend)	-	ATX	-	100 (TE, RGBW Only)	-	24 (2400K)
								250 (SE Only)		27 (2700K)
								400 (TE Only)		30 (3000K, Top Bend Only)
										35 (3500K, Top Bend Only)
										RGBW (RGBW, Top Bend Only)


EXAMPLE: 24V SIDE BEND ALPHATECH® X - 250 LUMENS - 3000K CCT

DI	-	24V	-	TE	-	ATX	-	250	-	30
DI-24V-TE-ATX-250-30										


NEW	100 LUMEN RANGE TOP BEND	250 LUMEN RANGE SIDE BEND	400 LUMEN RANGE TOP BEND
	Voltage: 24VDC Max. Run: 16 ft. Wattage: 6.2W/ft.	Voltage: 24VDC Max. Run: 16 ft. Wattage: 5.6W/ft.	Voltage: 24VDC Max. Run: 16 ft. Wattage: 4.6W/ft.

CCT			LUMENS / FT.
	2400K	-	248
	2700K	-	266
	3000K	-	314
	3500K	-	410
	RGBW	95	-

### NEW UNDER WIRE CHANNEL

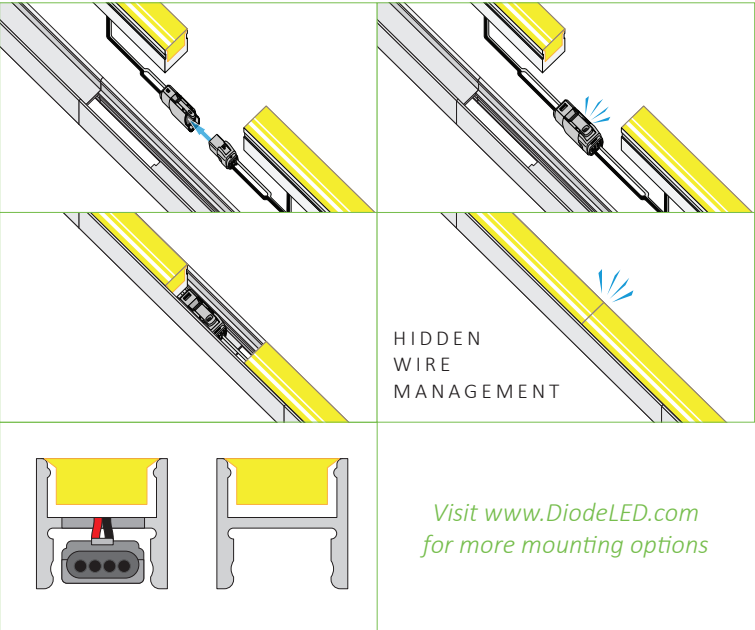

### ORIENTATION OPTIONS

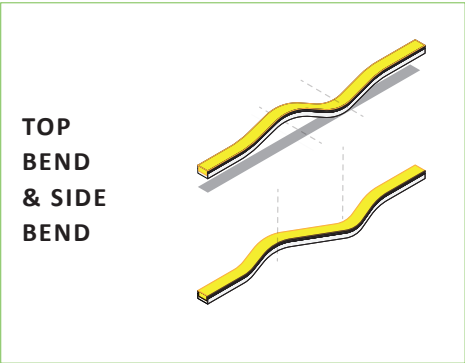

Visit [www.DiodeLED.com](http://www.DiodeLED.com) for more mounting options





ACTUAL SIZE

INDOOR

WET LOCATION

# STREAMLITE™

## DIFFUSED COB LINEAR LIGHT

Introducing the lowest profile COB linear lighting, featuring uniform illumination without the need for additional diffused covers or accessories. STREAMLITE delivers premium light quality from a solid stream of light. Perfect for areas with low clearance or reflective surfaces to eliminate spot-glare.

- Accent and task lighting
- Facade lighting
- Curved coves
- Vaulted arches and ceilings
- General architectural lighting

### FEATURES & BENEFITS

- Uniform diffusion without the need for accessories
- New COB Technology
- 180° beam angle
- Indoor and outdoor models
- Lowest profile for a diffused linear light

### QUICK SPECS

Voltage	24VDC
CRI	90+
Max. Run	16.4 ft.
Environment	Indoor / Outdoor - IP65
Dimmable	Yes
Warranty	5-Year Warranty

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.



## LINEAR LED LIGHTING

# STREAMLITE™ LED STRIP LIGHT

## SPECIFICATIONS & SKU BUILDER

DI	-	VOLTAGE	-	MODEL	-	CCT	-	LENGTH
DI	-	12V (12VDC, 3000K & 4000K only)	-	STMLT	-	27 (2700K) 30 (3000K) 40 (4000K) RD (Red) GN (Green)	-	016 (16.4 ft. Indoor) W016 (16.4 ft. Wet location)
24V (24VDC)								

EXAMPLE: STREAMLITE™ 3000K WET LOCATION 16.4 FOOT SPOOL

DI	-	24V	-	STMLT	-	30	-	W016
DI-24V-STMLT-30-W016								

### INDOOR-IP20

- 24V -  
- STMLT -

Max. Run: 16.4 ft.  
Cut Points: 2.5 in.  
Wattage: 3.3W/ft.

### WET LOCATION-IP65

- 12V -  
- STMLT - \*\* - W

Max. Run: 16.4 ft.  
Cut Points: 1.4 in.  
Wattage: 3.3W/ft.

- 24V -  
- STMLT - \*\* - W

Max. Run: 16.4 ft.  
Cut Points: 2.5 in.  
Wattage: 3.3W/ft.

CCT	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.
2700K	288	-	221
3000K	292	251	256
4000K	323	266	271
Red	42	-	38
Green	236	-	205

## INDOOR STREAMLITE CONNECTORS


IMAGE	SKU	PRODUCT DESCRIPTION
	DI-STMLT-CKT-SPL24-1	STREAMLITE Tape-to-Wire Connector, 24 in. (Splice)
	DI-STMLT-CKT-TTT-EXT	STREAMLITE Tape-to-Tape Connector, 12 in. Wire (Jumper)
	DI-STMLT-CKT-TTT-1	STREAMLITE Tape-to-Tape connector, No Wire (Tape-to-Tape)

Wet Location Connectors can be Factory Assembled for specific lengths

FACTORY  
ASSEMBLED  
LIGHTING  
FIXTURES

Install jobs faster and work more efficiently with lighting that arrives ready to install.

CALL FOR DETAILS





c **UL** <sup>us</sup>  
LISTED  
**676**  
RATED FOR POOLS  
& FOUNTAINS

NOW AVAILABLE  
HYDROLUME® SLIM RGB



PLACE YOUR ORDER TODAY

El Gee Lighting  
Pompano Beach, FL

# HYDROLUME® SLIM

HYDROLUME® SLIM and SLIM HD LED Strip Light are the ultimate lighting solutions for harsh environments. The HYDROLUME family is resistant to saltwater, water treatment chemicals like chlorine, and is UV resistant for outdoor applications.

Available in your choice of IP ratings..

### FIELD CUTTABLE - IP65

A diverse assortment of accessories support field cutting with multiple mounting options that support most outdoor environments.

### FACTORY FINISHED - IP68 SUBMERSIBLE

Diode LED uses its own patented process to customize and seal HYDROLUME to meet the highest demands of **UL 676** for use in pools and fountains. Call for details and availability.

### FEATURES & BENEFITS

- Wet location rated - IP65 and optional IP68
- UL field cuttable
- Quick and easy installation
- White light & RGB versions

### QUICK SPECS

Voltage	24VDC
Wattage	1.22W/ft. (HYDROLUME SLIM) 2.44W/ft. (HYDROLUME SLIM HD) 3W/ft. (HYDROLUME RGB)
CCT (Color)	2700K, 3000K, 4000K, 6500K, RGB
Dimming	Dimmable, Color Changing
Environment	IP65 - Field cuttable IP68 - Call for details

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.



## LINEAR LED LIGHTING



## HYDROLUME® SLIM LED TAPE LIGHT

### SPECIFICATIONS & SKU BUILDER

DI	-	VOLTAGE	-	MODEL	-	CCT	-	LENGTH	-	IP RATING
DI	-	24V (24VDC)	-	HLS (Standard) HLSP (High Density)	-	27 (2700K) 30 (3000K) 40 (4000K) 65 (6500K)	-	65 (65.6 ft. - Standard Only) 32 (32.8 ft. - High Density Only)	-	IP65 IP68

EXAMPLE: HYDROLUME® SLIM HD 3000K 32.8 FT. SPOOL

DI	-	24V	-	HLSP	-	30	-	32	-	IP65
DI-24V-HLSP30-32-IP65										

## HYDROLUME® SLIM LED TAPE LIGHT

### HYDROLUME SLIM

- 24V -

- HLS-\*\* -

Max Run: 65.5 ft.  
Cut Point: 9.84 in.  
Chip Density: 8 / ft.  
Wattage: 1.22W / ft.

### HYDROLUME SLIM HD

- 24V -

- HLSP-\*\* -

Max Run: 32.8 ft.  
Cut Point: 6.88 in.  
Chip Density: 12 / ft.  
Wattage: 2.44W / ft.

CCT	LUMENS / FT.	LUMENS / FT.
2700K	113	226
3000K	113	226
4000K	122	244
6500K	122	244



IP65 CONNECTORS FOR THIS PRODUCT  
AT RIGHT. FOR TAILORED IP68 & UL 676  
LENGTHS PLEASE CALL 877.817.6028

RGB (IP68)

Lumens/ft.: 96 Max.  
Max Run: 25.29 ft.  
Wattage: 3W/ft.

HYDROLUME RGB is only  
available in factory made lengths  
that are IP68 & UL 676 rated.  
Call for details 877.817.6028

## HYDROLUME® CONNECTORS & ACCESSORIES (IP65)

IMAGE	SKU	PRODUCT DESCRIPTION
	DI-HLS-EC-10	End Cap White 10 Pack
	DI-HLS-IC	I-Connector White
	DI-HLS-JP4	Cable Jumper 4"
	DI-HLS-JP6	Cable Jumper 6"
	DI-HLS-JP12	Cable Jumper 12"
	DI-HLS-JP24	Cable Jumper 24"
	DI-HLS-LC	L Connector White
	DI-HLS-SP24	Splice Connector
	DI-HLS-TC	T-Connector White
	DI-HLS-XC	X-Connector White
	DI-HLS-MTBR	Mounting Bracket Clear - 10 pack
	DI-HLS-MTCH	Mounting Channel - 2 pack




DIFFUSED, SATURATED,  
AND VIBRANT WHITE  
OR POPULAR COLORS  
FROM END TO END



# NEON BLAZE™

Bring the ultimate accent lighting into your project. With Zero Line Diffusion™ technology, color is saturated from end to end. Choose from multiple outputs in lengths up to 65 feet in the most popular colors. Field cuttable and easy to install with multiple mounting options.

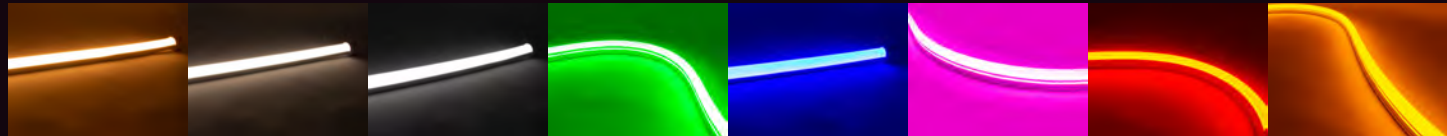

### FEATURES & BENEFITS

- Tight bend radius
- Mimics traditional neon
- Lettering or accent lighting
- Two flexible styles

### QUICK SPECS

Voltage	24VDC
Wattage	See chart on next page
Dimmable	Yes
Max. Run	Up to 65.6 ft.
Environment	Indoor / Outdoor - IP65
Warranty	5-Year Warranty
Field Cuttable	Single color - Yes RGB - No
Certification	UL Listed 2108

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.













## NEON BLAZE™ LINEAR LIGHTING

### SPECIFICATIONS & SKU BUILDER

DI	-	VOLTAGE	-	BEND STYLE	-	MODEL	-	CCT	-	LENGTH
DI	-	24V (24VDC)	-	SE TE	-	NBL1 NBL2 NBL4	-	27 30 35 63 GN	-	BL PK RD GL RGB (SE Only)
										16 (16 ft. - 4.4W) 32 (32 ft. - 2.4W) 65 (65 ft. - 1.22W)

EXAMPLE: 24V NEON BLAZE™ 4.4W SIDE EMITTING RED 16.4 FT SPOOL

DI	-	24V	-	SE	-	NBL4	-	RD	-	16
DI-24V-SE-NBL4-RD-16										


BEND STYLE	TOP BEND -TE-			SIDE BEND -SE-			
							
POWER OPTIONS ~ LENGTHS	1.22W / ft.	2.44W / ft.	4.4W / ft.	1.22W / ft.	2.44W / ft.	4.4W / ft.	
	-NBL1-	-NBL2-	-NBL4-	-NBL1-	-NBL2-	-NBL4-	
	Max run/ spool length: 65 ft.	Max run/ spool length: 32 ft.	Max run/ spool length: 16 ft.	Max run/ spool length: 65 ft.	Max run/ spool length: 32 ft.	Max run/ spool length: 16 ft.	
	-65-	-32-	-16-	-65-	-32-	-16-	
	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	LUMENS / FT.	
-27-	2700K 	86	173	248	62	134	208
-30-	3000K 	102	219	317	65	146	198
-35-	3500K 	89	178	273	60	120	195
-63-	6300K 	88	174	266	59	116	173
-GN-	Green 	88	148	151	30	48	78
-BL-	Blue 	18	30	37	6	12	18
-PK-	Pink 	39	93	110	17	37	53
-RD-	Red 	31	61	64	11	21	34
-GL-	Gold 	70	157	184	31	61	84
-RGB-	RGB 	NEON RGB is <u>only</u> available in factory assembled lengths and is not field cuttable. Call for details.			20 lumen Maximum	NA	42 lumen Maximum
Side Bend Only							



# NEON BLAZE™ Accessories

Solid color NEON BLAZE™ is field cuttable and can by modified on the job. See accessories below and be sure to visit the website at [www.DiodeLED.com](http://www.DiodeLED.com) for full documentation and installation guidelines.

NEON BLAZE™ RGB is not field cuttable and not compatible with some accessories.

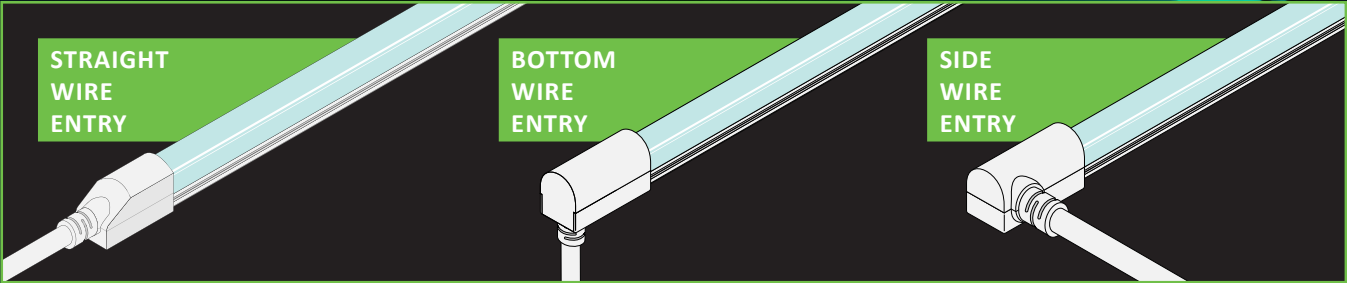

## NEON BLAZE CONNECTORS

EXPANDED CONNECTORS

SKU	DESCRIPTION	SKU	DESCRIPTION
DI-TE-NB-SDWC-EC	Top Bending Neon, Side wire entry connector and end cap pair	DI-SE-NB-SDWC-EC	Side Bending Neon Side wire entry connector and end cap pair
DI-TE-NB-BWC-EC	Top Bending Neon, Bottom wire entry connector and end cap pair	DI-SE-NB-BWC-EC	Side Bending Neon Bottom wire entry connector and end cap pair
DI-TE-NB-STWC-EC	Top Bending Neon, Straight wire entry connector and end cap pair	DI-SE-NB-STWC-EC	Side Bending Neon Straight wire entry connector and end cap pair
DI-TE-NB-3JPR	Top Bending Neon 3" Jumper with Frosted top cap and end cap	DI-SE-NB-3JPR	Side Bending Neon 3" Jumper with Frosted top cap and end cap
DI-TE-NB-6JPR	Top Bending Neon 6" Jumper with Frosted top cap and end cap	DI-SE-NB-6JPR	Side Bending Neon 6" Jumper with Frosted top cap and end cap
DI-TE-NB-12JPR	Top Bending Neon 12" Jumper with Frosted top cap and end cap	DI-SE-NB-12JPR	Side Bending Neon 12" Jumper with Frosted top cap and end cap
DI-TE-NB-24JPR	Top Bending Neon 24" Jumper with Frosted top cap and end cap	DI-SE-NB-24JPR	Side Bending Neon 24" Jumper with Frosted top cap and end cap
DI-TE-NB-TTT-2	Top Bending Neon Strip-to-strip Connector	DI-SE-NB-TTT-2	Side Bending Neon Strip-to-strip Connector

DI-NB-96M-CNCT Neon male extension connector with 8ft lead

## NEON BLAZE MOUNTING HARDWARE

EXPANDED MOUNTING HARDWARE

SKU	DESCRIPTION	SKU	DESCRIPTION
DI-TE-NB-TUC-16	Top Bending Neon top u-clip, bag of 16	DI-SE-NB-TUC-16	Side Bending Neon Top u-clip, bag of 16
DI-TE-NB-BUC-16	Top Bending Neon bottom u-clip, bag of 16	DI-SE-NB-BUC-16	Side Bending Neon Bottom u-clip, bag of 16
DI-TE-NB-MTCH	Top Bending Neon channel 35 in.	DI-SE-NB-MTCH	Side Bending Neon 35" inch channel
DI-TE-NB-FLCH-WH	Top Bending Neon Flexible Spine Channel 39 in.	DI-SE-NB-FLCH-WH	Side Bending Neon Flexible Spine Channel 39 in.



Halper Lighting Solutions  
Ohio






Bloomingdales  
New York, NY

# TOTALLY DIFFUSED FLEXIBLE WHITE LIGHT NEON BLAZE™

With high output white NEON BLAZE™, it has never been easier to create a professional, seamlessly illuminated environment. Total diffusion and quality light output are easily achieved without the complicated use of diffusion covers. It is also dimmable and field cuttable.

- High quality light
- UL Listed (2108)
- Dimmable
- Indoor & outdoor use
- Field cuttable
- Up to 65ft. runs

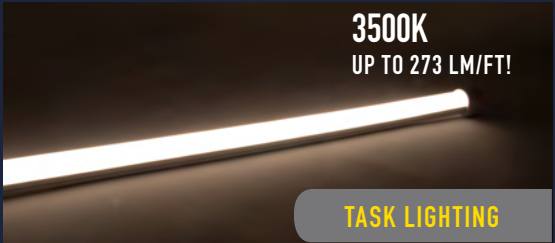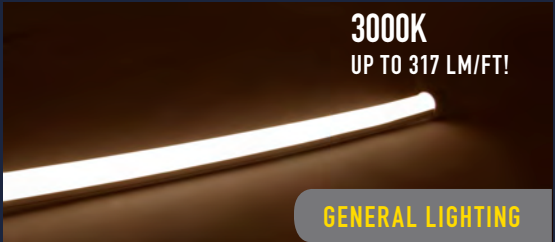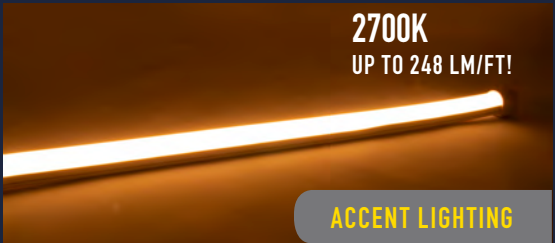





2400K ← → 6000K

# BLAZE™ SELECT TUNABLE WHITE LIGHTING SYSTEM

Dynamic and tunable white light at the push of a button delivers an impressive range of warm light with the BLAZE SELECT Dynamic White Light System. Offered in a range of 2400K to 6000K, you'll get rich color-rendering and 95+ CRI.

Control: Choose from three control types to find the one that works best with your application

- Mobile
- Standalone Remote
- Wall-mounted

## FEATURES & BENEFITS

- Tunable white light range
- Wide kelvin range from 2400K-6000K
- High performance lumen output - up to 580+ lm/ft.
- Controllable from a variety of technology choices

## QUICK SPECS

Voltage	24VDC
CRI	95+
Warranty	12-Year Warranty
Dimming	Dimmable, Color Tuning
Environment	Indoor / Damp Location / IP20
Certification	UL Listed 2108

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.



## LINEAR LED LIGHTING

# BLAZE™ SELECT TUNABLE WHITE LIGHT SYSTEM

## SPECIFICATIONS & SKU BUILDER

DI	-	VOLTAGE	-	MODEL	-	CCT	-	LENGTH
DI	-	24V (24VDC)	-	BLSEL	-	TW2460	-	016 (16.4 ft.) 100 (100 ft.)

EXAMPLE: BLAZE™ SELECT 24V 16.4 FT SPOOL

DI	-	24V	-	BLSEL	-	TW2460	-	016
DI-24V-BLSEL-TW2460-016								

## BLAZE™ SELECT -BLSEL- TW2460 -


Max. Run: 16.4 ft.  
Cut Points: 4 in.  
Wattage: 5.3W/ft.

CCT	LUMENS / FT.
2400K	270
6000K	336
Combined	586

## Tunable White Light Controllers

PRODUCT IMAGE	PRODUCT NAME	SKU
	<b>TOUCHDIAL™ REMOTE Tunable White CONTROL</b> (Use with the TOUCHDIAL Receiver-REQUIRED)	DI-RF-REM-TW-4 (DI-RF-REC-CV-A)
	<b>Dual Color/Tunable White DMX512 Controller</b>	DI-DMX-WIFI-WMDC-1ZWH
	<b>Casambi - PWM4</b>	CBU-PWM4

**FACTORY  
ASSEMBLED  
LIGHTING  
FIXTURES**  
Install jobs faster and  
work more efficiently  
with lighting that arrives  
ready to install.  
CALL FOR DETAILS



**FOR OPTIMAL PERFORMANCE  
CUSTOM CONFIGURATION IS RECOMMENDED.  
CALL CUSTOMER SERVICE FOR DETAILS**





ACTUAL SIZE

INDOOR

Acropolis Lighting  
San Luis Obispo, CA

# DAZZLE® 24 RGBW 4D

## QUAD-CHIP COLOR WITH WHITE LIGHT

Our most advanced color changing linear light features a new quad-chip capable of billions of colors.

- Density** - Tighter LED population for the brightest output
- Diffusion** - Works with CHROMAPATH Premium Diffusion Covers
- Distribution** - The best light distribution RGBW product available
- Dynamics** - Best color-mixing for exact color-matching

### FEATURES & BENEFITS

- 4 billion color combinations
- Increased LED density for enhanced color saturation, blending and brightness
- Diode LED controller or DMX compatible

### QUICK SPECS

Voltage	24VDC
Wattage	6.4W / ft.
Max. Run	16.4 ft.
Field Cuttable	Every 4 in.
Certification	UL Listed 2108

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.



## DAZZLE® 24 RGBW 4D LED TAPE LIGHT

### SPECIFICATIONS & SKU BUILDER

DI	-	VOLTAGE	-	MODEL	-	LENGTH
DI	-	24V (24VDC)	-	RGBW4	-	0016 (16.4 ft. Indoor) W016 (16.4 ft. Wet Location)

EXAMPLE: DAZZLE® RGBW 4D 16.4 FOOT INDOOR POOL

DI	-	24V	-	RGBW4	-	0016
DI-24V-RGBW4-0016						

### INDOOR-IP20

- 24V -  
- RGBW4 -

Max. Run: 16.4 ft.  
Cut Points: 4 in.  
Wattage: 6.4 W/ft.

#### CCT

RGB  
(W) 3000K

#### LUMENS / FT.

275

### WET LOCATION-IP65

- 24V -  
- RGBW4 - W


Max. Run: 16.4 ft.  
Cut Points: 4 in.  
Wattage: 6.4 W/ft.

#### LUMENS / FT.

239

### FACTORY ASSEMBLED LIGHTING FIXTURES

Install jobs faster and work more efficiently with lighting that arrives ready to install.  
CALL FOR DETAILS



Indoor-IP20  
CONNECTORS  
PAGE 40



### Wet Location RGB Connector & Accessories

**Connector Note:** Class 2 maximum load limit on all strip light connectors.

PRODUCT IMAGE	PRODUCT NAME	SKU
	RGBW Wet Location Extension Cable - 39 in	DI-RGBW-WEXT
	RGBW Wet Location Accessories Pack Includes: 10x mounting clips, 20x screws, 2x open end caps, 2x closed end caps, 1x splice cable pair (M/F)	DI-RGBW-WACY
	Silicone Sealant (1 tube)	DI-WPSL





WET LOCATION

# DAZZLE® 24 RGB

## Color Changing LED TAPE LIGHT

DAZZLE 24® RGB LED Tape Light is an excellent solution for full color dynamic effects. DAZZLE 24 transforms any space into a special event and adds excitement to retail and commercial spaces. Engineered with our high performance flexible circuit boards for heat management and electrical distribution, DAZZLE 24 provides over 16 million color options and evenly distributes the light throughout creating just the lighting effect you want.

FEATURES & BENEFITS

- Indoor & outdoor options
- 16 million color combinations
- Dynamic and versatile accent lighting
- Compatible with Diode LED Color Controllers or Nicolaudio® DMX

QUICK SPECS

Voltage	24VDC
Wattage	4.32W / ft.
Max. Run	16.4 ft.
Field Cuttable	Every 4 in.
Certification	UL Listed 2108

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.



LINEAR LED LIGHTING

DAZZLE® 24 RGB TAPE LIGHT  
SPECIFICATIONS & SKU BUILDER

DI	-	VOLTAGE	-	MODEL	-	LENGTH
DI	-	24V (24VDC)	-	DRGB	-	0016 (16.4 ft. Indoor) 0100 (100 ft. Indoor) W016 (16.4 ft. Wet Location)
EXAMPLE: DAZZLE® RGB WET LOCATION 16.4 FT. SPOOL						
DI	-	24V	-	DRGB	-	W016
DI-24V-DRGB-W016						

INDOOR-IP20	WET LOCATION-IP65
<div>- 24V - - DRGB -</div> <div>Max. Run: 16.4 ft. Cut Points: 4 in. Wattage: 4.32W/ft.</div>	<div>- 24V - - DRGB - W</div> <div>Max. Run: 16.4 ft. Cut Points: 4 in. Wattage: 4.32W/ft.</div>
<div>CCT</div> <div>RGB</div>	<div>LUMENS / FT.</div> <div>160</div>
<div>LUMENS / FT.</div> <div>160</div>	

FACTORY ASSEMBLED LIGHTING FIXTURES

Install jobs faster and work more efficiently with lighting that arrives ready to install.  
CALL FOR DETAILS

CONNECTORS

PAGE 40

PRODUCT IMAGE	PRODUCT NAME	SKU
	Wet Location RGB Splice Connector Pair	DI-0766
	Wet Location RGB Extension Cable	DI-0778

					
MOUNTING CLIPS		RGB WET LOCATION END-CAPS		SILICONE SEALANT	
SKU	DESCRIPTION	SKU	DESCRIPTION	SKU	DESCRIPTION
DI-WLMC-RGB	Pack of 10	DI-0842-25	Pack of 25	DI-WPSL	One tube of sealant



8mm Tape Light Terminal Block Connector

60W on 12V circuits  
96W on 24V circuits

Connector Note: Class 2 maximum load limit on all tape light connectors.

Terminal Tape Light Connector Compatibility

BLAZE™ X

BLAZE™

BLAZE™ COLORS

View product page for full compatibility and installation guidelines

NEW

0.23 in.  
0.50 in.  
0.58 in.

90° Corner Connector, 8mm

NEW

0.23 in.  
0.50 in.  
0.63 in.

Wire Range: 16-20AWG

8mm Tape-To-Tape Terminal Connectors

SKU	BUNDLE OPTIONS
DI-TB8-CONN-TTT-1	Single
DI-TB8-CONN-TTT-5	Pack of 5, bulk
DI-TB8-CONN-TTT-25	Pack of 25, individually bagged
DI-TB8-CONN-TTT-25-BULK	Pack of 25, bulk
DI-TB8-90-TTT-1	Tape Light 90 Degree Corner Connector With Attached 8mm Tape-to-Tape Terminal Blocks - Pack of 1



8mm Tape-To-Tape Terminal Connectors w/ Jumper Cables

SKU	BUNDLE OPTIONS
DI-TB8-60JPR-TTT-1	Single, Jumper Cable, 60 in. 20 AWG Wire Lead
DI-TB8-60JPR-TTT-25	Pack of 25, singles, Jumper Cable, 60 in. 20 AWG WireLead
DI-TB8-60JPR-TTT-25B	Pack of 25, bulk, Jumper Cable, 60 in. 20 AWG Wire Lead
DI-TB8-6JPR-TTT-1	Single, Jumper Cable, 6 in. 20 AWG Wire Lead
DI-TB8-6JPR-TTT-25	Pack of 25, singles, Jumper Cable, 6 in. 20 AWG Wire Lead
DI-TB8-6JPR-TTT-25B	Pack of 25, bulk, Jumper Cable, 6 in. 20 AWG Wire Lead

8mm Tape-To-Wire Terminal Connectors

SKU	BUNDLE OPTIONS
DI-TB8-CONN-TTW-1	Single
DI-TB8-CONN-TTW-5	Pack of 5
DI-TB8-CONN-TTW-25	Pack of 25, individually bagged
DI-TB8-CONN-TTW-25-BULK	Pack of 25, bulk



8mm Tape-To-Wire Terminal Connectors w/ Splice Cable Leads

SKU	BUNDLE OPTIONS
DI-TB8-60SPL-TTW-1	Single, Lead Wire Attached, 60 in. 20 AWG Splice Wire
DI-TB8-60SPL-TTW-25	Pack of 25, singles, Lead Wire Attached, 60 in. 20 AWG Splice Wire
DI-TB8-60SPL-TTW-25B	Pack of 25, bulk, Lead Wire Attached, 60 in. 20 AWG Splice Wire



12mm Tape Light Terminal Block Connector

60W on 12V circuits  
96W on 24V circuits

Connector Note: Class 2 maximum load limit on all tape light connectors.

Terminal Tape Light Connector Compatibility

For use with VALENT® X tight-pitch LED tape light only

View product page for full compatibility and installation guidelines

90° Corner Connector, 12mm

0.26 in.  
0.59 in.  
0.62 in.

Wire Range: 14-20AWG

12mm Tape-To-Tape Terminal Connectors

SKU	BUNDLE OPTIONS
DI-TB12-CONN-TTT	Single
DI-TB12-CONN-TTT-5	Pack of 5
DI-TB12-CONN-TTT-25	Pack of 25, individually bagged
DI-TB12-CONN-TTT-25-BULK	Pack of 25, bulk
DI-TB12-90-TTT-1	Tape Light 90 Degree Corner Connector With Attached 12mm Tape-to-Tape Terminal Blocks - Pack of 1

12mm Tape-To-Wire Terminal Connectors

SKU	BUNDLE OPTIONS
DI-TB12-CONN-TTW	Single
DI-TB12-CONN-TTW-5	Pack of 5
DI-TB12-CONN-TTW-25	Pack of 25, individually bagged
DI-TB12-CONN-TTW-25	Pack of 25, bulk

CLICKTIGHT® Color Changing Tape Light Connectors

CLICKTIGHT® connectors are an easy way to install your color changing LED tape light out in the field.

Connector Note: Class 2 maximum load limit on all CLICKTIGHT® tape light connectors.


96W on 24V circuits

LED TAPE LIGHT COMPATIBILITY

PRODUCT	SKU (SINGLE UNITS)	SKU (PACK OF 5)	SKU (PACK OF 25)	LENGTH	DAZZLE® RGB	DAZZLE® RGBW & RGBW 4D
 CLICKTIGHT TAPE LINK CONNECTOR	DI-0895	DI-0895-5	DI-0895-25	N/A	●	
	DI-RGBW-CKT-LNK	DI-RGBW-CKT-LNK-5	DI-RGBW-CKT-LNK-25	N/A		●
 CLICKTIGHT SPLICE CONNECTOR	DI-0885	DI-0885-5	DI-0885-25	3 in.	●	
	DI-0886	DI-0886-5	DI-0886-25	24 in.	●	
	DI-0887	DI-0887-5	DI-0887-25	48 in.	●	
	DI-RGBW-CKT3-SPLE	DI-RGBW-CKT3-SPLE-5	DI-RGBW-CKT3-SPLE-25	3 in.		●
	DI-RGBW-CKT24-SPLE	DI-RGBW-CKT24-SPLE-5	DI-RGBW-CKT24-SPLE-25	24 in.		●
	DI-0890	DI-0890-5	DI-0890-25	3 in.	●	
 CLICKTIGHT FLEXIBLE EXTENSION CONNECTOR	DI-1090	DI-1090-5	DI-1090-25	6 in.	●	
	DI-1091	DI-1091-5	DI-1091-25	12 in.	●	
	DI-0891	DI-0891-5	DI-0891-25	24 in.	●	
	DI-0892	DI-0892-5	DI-0892-25	48 in.	●	
	DI-RGBW-CKT3-EXT	DI-RGBW-CKT3-EXT-5	DI-RGBW-CKT3-EXT-25	3 in.		●
	DI-RGBW-CKT24-EXT	DI-RGBW-CKT24-EXT-5	DI-RGBW-CKT24-EXT-25	24 in.		●
	DI-0895	DI-0895-5	DI-0895-25	N/A	●	



# BUILT YOUR WAY & READY TO INSTALL



SAVE INSTALL TIME  
OPTIMIZED ILLUMINATION  
FACTORY-CERTIFIED CUSTOMIZATION

## FACTORY TASK • ACCENT • DISPLAY ASSEMBLY

Large commercial or retail applications & small residential projects

### FACTORY CUT LINEAR LIGHTING

Factory made lengths of all BLAZE X, VALENT X, DAZZLE, and HYDROLUME Linear lighting families. Complete with lead wire and connectors.  
**Recommended for large projects or high-unit-volume installations.**


### FACTORY CUT CHANNEL PROFILES

Custom cut channel profiles to precise measurements.  
**Recommended for installers who prefer field-cut installations with stocked Diode LED tape lighting.**


### FULLY ASSEMBLED CHANNELS

Premium creation of a complete, ready-to-install low-voltage lighting fixture (tape light and channel combined).  
**Recommended for precision projects that need fast, frustration-free installation.**

## FACTORY ASSEMBLY

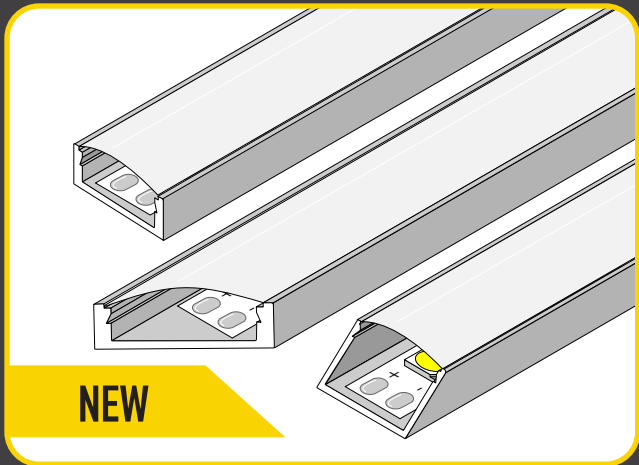

MITER CUTS ON CHANNELS

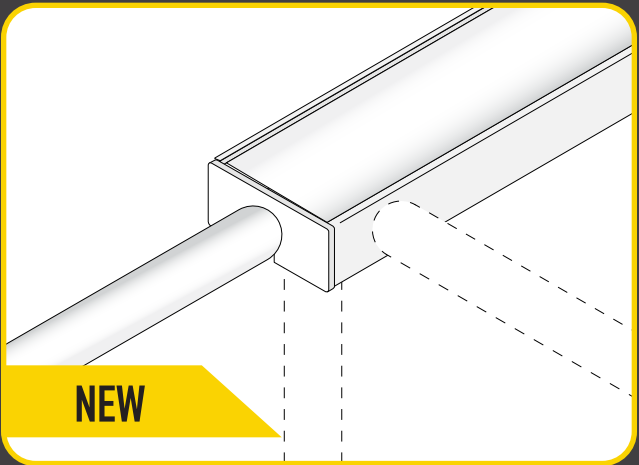

ALTERNATE WIRE ENTRY

FACTORY CUT  
LINEAR  
LIGHTING

FACTORY CUT  
CHANNEL  
PROFILES

FULLY  
ASSEMBLED  
CHANNELS

### FACTORY SOLUTIONS

●	●	<b>LUMEN OUTPUT &amp; COLOR</b> Choose from available CCTs or color changing options.
●	●	<b>LENGTH AND CONNECTION</b> Your choice of wire and connection to integrate seamlessly with your environment.
●	●	<b>CHANNEL PROFILE</b> Select from over a dozen proven and reliable channel options, the ideal style for your project.
●	●	<b>MITER CUTS *</b> Directional 45 degree end-cuts can be made for multi-axis lighting projects.
	●	<b>ALTERNATE WIRE ENTRY *</b> Choose an <i>Alternate Wire Entry</i> for cleaner installations requiring side or back wire entry.
	●	<b>MOUNTING OPTIONS *</b> Pressure-fit clips, adhesives, suspension cables, and magnetic alternatives.

\* Not available on all profiles. See specifications at [www.DiodeLED.com](http://www.DiodeLED.com) or call Customer Service for details.




TAPE LIGHT CHANNEL COMPATIBILITY CHART

	TAPE LIGHT													
CHANNELS	BLAZE™ BLAZE™ X BLAZE™ COLORS	VALENT® X	DAZZLE 24° RGB	DAZZLE 24° RGBW DAZZLE 24° RGBW 4D	STREAM- LITE™	BLAZE™ SELECT	BLAZE™ MINI	SQUIGGLY™ 200	WET LOCATION BLAZE™ BLAZE™ X	WET LOCATION VALENT® X	WET LOCATION DAZZLE 24° RGB	WET LOCATION DAZZLE 24° RGBW 4D	WET LOCATION STREAM- LITE™	
	SLIM	●	●	●	●	●	●	●	●	-	-	-	●	
	CANAL	●	●	●	●	●	●	●	●	-	-	-	●	
	SQUARE	●	●	●	●	●	●	●	●	-	-	-	●	
	DUO	●	-	-	●	●	●	●	-	-	-	-	-	
	ROD	●	●	●	-	●	●	●	●	-	-	-	-	-
	GRAZER Narrow	●	-	●	-	●	●	●	●	-	-	-	-	-
	45°	●	●	●	●	●	●	●	●	-	-	-	-	●
	16mm	●	●	●	●	●	●	●	●	●	●	●	-	●
	SCONCE	●	-	-	-	●	●	●	●	●	-	●	-	●
	10mm SQUARE CORNER	●	-	●	-	●	●	●	●	-	-	-	-	-
	20mm SQUARE CORNER	●	●	●	●	●	●	●	●	-	●	-	-	-
	45° DECO	●	●	●	-	●	●	●	●	-	-	-	-	-
	10mm ROUNDED CORNER	●	-	●	-	●	●	●	●	-	-	-	-	-
20mm ROUNDED CORNER	●	●	●	●	●	●	●	●	-	●	-	-	-	
SLIM RECESSED	●	-	●	-	●	●	●	●	-	-	-	-	-	
RECESSED	●	●	●	●	●	●	●	●	●	-	●	-	●	
S1	●	●	●	-	●	●	●	●	●	-	-	-	●	
REFLECTOR	●	●	●	●	●	●	●	●	●	-	-	-	●	
90° SIDEVIEW	●	●	●	●	●	●	●	●	●	-	-	-	●	
WAVEFORM	●	●	●	-	●	●	●	●	●	-	●	-	●	
MUD-IN 1 INCH	●	●	●	●	●	●	●	●	●	●	●	●	●	
MUD-IN 2 INCH	●	●	●	●	●	●	●	●	●	●	●	●	●	



NOTE: Channel Bundles are not interchangeable with each other. Check online specification sheet for connector compatibility.

CHANNEL BUNDLE  
SLIM



TAPE LIGHT COMPATIBILITY:

BLAZE™ X  
BLAZE™  
VALENT® X


See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-SL-48(*)	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>1 set of end-caps</li><li>2 mounting clips with screws</li></ul>
DI-CPCHB-SL-96(*)	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>1 set of end-caps</li><li>4 mounting clips with screws</li></ul>

See SLIM accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)  
\*See Finish Options to the right for SKU add-on for color options  
Example: SLIM Channel in White: DI-CPCHB-SL-48W



CHANNEL BUNDLE  
CANAL



TAPE LIGHT COMPATIBILITY:

BLAZE™ X  
BLAZE™  
VALENT® X


See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-CAN-48(*)	<ul style="list-style-type: none"><li>48 in. channel &amp; Opal cover - Aluminum</li><li>1 set of end-caps &amp; mounting clips</li></ul>
DI-CPCHB-CAN-96(*)	<ul style="list-style-type: none"><li>96 in. channel &amp; Opal cover - Aluminum</li><li>2 sets of end-caps &amp; mounting clips</li></ul>

See CANAL accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)  
\*See Finish Options to the right for SKU add-on for color options  
Example: CANAL Channel in White: DI-CPCHB-CAN-48W



CHANNEL BUNDLE  
SQUARE




TAPE LIGHT COMPATIBILITY:

BLAZE™ X  
BLAZE™  
VALENT® X

See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-SQ-48(*)	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>1 set of end-caps</li><li>2 mounting clips</li></ul>
DI-CPCHB-SQ-96(*)	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>2 set of end-caps</li><li>4 mounting clips</li></ul>

See SQUARE accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)  
\*See Finish Options to the right for SKU add-on for color options  
Example: SQUARE Channel in White: DI-CPCHB-SQ-48W

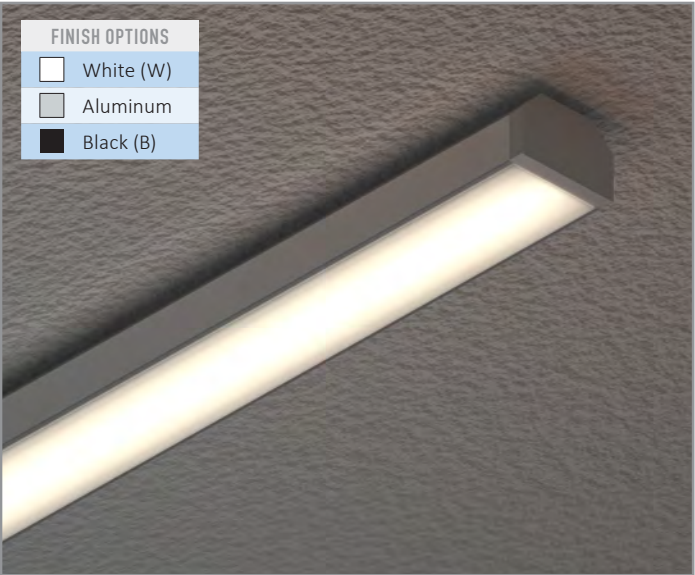




TAPE LIGHT MOUNTING CHANNELS

NOTE: Channel Bundles are not interchangeable with each other. Check online specification sheet for connector compatibility.

CHANNEL BUNDLE  
DUO

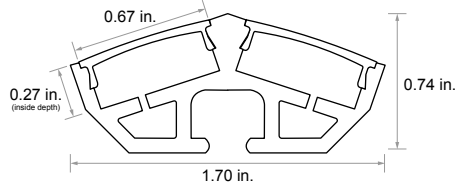

TAPE LIGHT COMPATIBILITY:


BLAZE™ X  
BLAZE™  
VALENT® X

See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-DU-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>1 sets of end-caps &amp; 2 mounting clips</li></ul>

See DUO accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)

CHANNEL BUNDLE  
ROD




TAPE LIGHT COMPATIBILITY:

BLAZE™ X  
VALENT® X  
BLAZE™

See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHPB-RDCL-79	<ul style="list-style-type: none"><li>78 in. closet channel &amp; frosted cover</li><li>1 set of end-caps</li><li>2 closet lighting brackets</li><li>180° swivel bracket</li></ul>
DI-CPCHB-RDART-79	<ul style="list-style-type: none"><li>78 in. art channel &amp; frosted cover</li><li>1 set of end-caps</li><li>2 art lighting brackets</li><li>180° swivel bracket</li></ul>
DI-CPCHB-RDWAL-79	<ul style="list-style-type: none"><li>78 in. wall channel &amp; frosted cover</li><li>1 set of end-caps</li><li>2 wall lighting brackets</li><li>180° swivel bracket</li></ul>

See ROD accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)

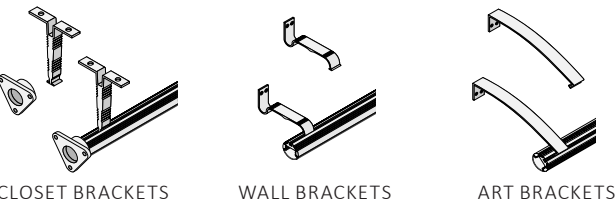


CLOSET BRACKETS      WALL BRACKETS      ART BRACKETS



TAPE LIGHT MOUNTING CHANNELS

NOTE: Channel Bundles are not interchangeable with each other. Check online specification sheet for connector compatibility.

CHANNEL BUNDLE  
GRAZER  
NARROW



TAPE LIGHT COMPATIBILITY:


BLAZE™ X  
BLAZE™  
VALENT® X

See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-GZRN-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>1 set of end-caps</li><li>2 mounting clips</li></ul>
DI-CPCHB-GZRN-96	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>2 set of end-caps</li></ul>

See GRAZER NARROW accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)

CHANNEL BUNDLE  
45°



TAPE LIGHT COMPATIBILITY:


BLAZE™ X  
BLAZE™  
VALENT® X

See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-45-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>1 set of end-caps</li><li>2 mounting clips</li></ul>
DI-CPCHB-45-96	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>2 sets of end-caps</li><li>4 mounting clips</li></ul>

See 45° accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)

CHANNEL BUNDLE  
16mm



TAPE LIGHT COMPATIBILITY:

BLAZE™ X  
BLAZE™  
VALENT® X

See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-16MM-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>2 sets of end-caps &amp; opal lens</li><li>2 mounting clips</li></ul>
DI-CPCHB-16MM-96	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>2 sets of end-caps &amp; opal lens</li><li>4 mounting clips</li></ul>

See 16mm accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)






TAPE LIGHT MOUNTING CHANNELS

NOTE: Channel Bundles are not interchangeable with each other. Check online specification sheet for connector compatibility.

CHANNEL BUNDLE  
SCONCE



TAPE LIGHT COMPATIBILITY:


BLAZE™ X  
BLAZE™ See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-SCNC-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>
DI-CPCHB-SCNC-96	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>

See SCONCE accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)



CHANNEL BUNDLE  
10mm  
SQUARE  
CORNER



TAPE LIGHT COMPATIBILITY:


BLAZE™ X  
BLAZE™ See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-SQC10-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>
DI-CPCHB-SQC10-96	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>

See 10mm SQUARE CORNER accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)



CHANNEL BUNDLE  
20mm  
SQUARE  
CORNER



TAPE LIGHT COMPATIBILITY:

BLAZE™ X  
VALENT® X  
BLAZE™ See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-SQC20-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>
DI-CPCHB-SQC20-96	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>


See 20mm SQUARE CORNER accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)



TAPE LIGHT MOUNTING CHANNELS

NOTE: Channel Bundles are not interchangeable with each other. Check online specification sheet for connector compatibility.

CHANNEL BUNDLE  
45° DECO



TAPE LIGHT COMPATIBILITY:


BLAZE™ X  
BLAZE™ See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-45DCO-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>
DI-CPCHB-45DCO-96	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>

See 45° DECO accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)



CHANNEL BUNDLE  
10mm  
ROUNDED  
CORNER



TAPE LIGHT COMPATIBILITY:


BLAZE™ X  
BLAZE™ See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-RC10-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>
DI-CPCHB-RC10-96	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>

See 10mm ROUNDED CORNER accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)



CHANNEL BUNDLE  
20mm  
ROUNDED  
CORNER



TAPE LIGHT COMPATIBILITY:

BLAZE™ X  
VALENT® X  
BLAZE™ See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-RC20-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>
DI-CPCHB-RC20-96	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>

See 20mm ROUNDED CORNER accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)






TAPE LIGHT MOUNTING CHANNELS

NOTE: Channel Bundles are not interchangeable with each other. Check online specification sheet for connector compatibility.

CHANNEL BUNDLE  
SLIM  
RECESSED




TAPE LIGHT COMPATIBILITY:


BLAZE™ X  
BLAZE™ See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHA-SLR-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>1 set of end-caps</li></ul>
DI-CPCHA-SLR96	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>1 set of end-caps</li></ul>

See SLIM RECESSED accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)

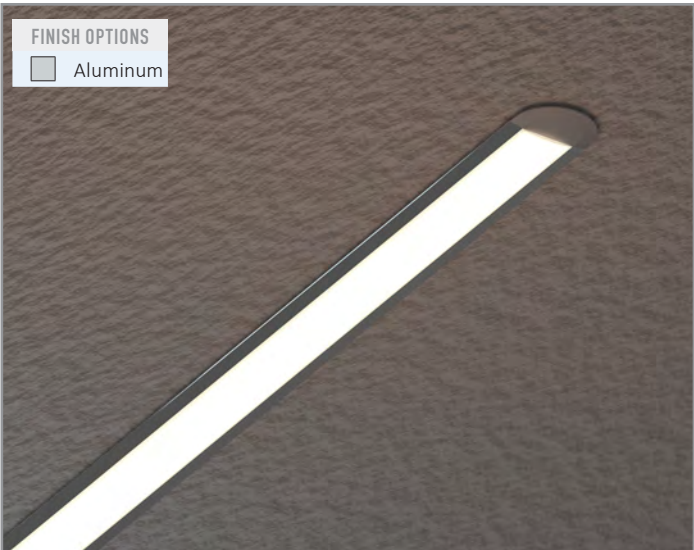

CHANNEL BUNDLE  
RECESSED

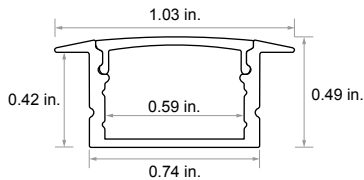


TAPE LIGHT COMPATIBILITY:


BLAZE™ X  
VALENT® X  
BLAZE™ See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-REC-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>1 set of end-caps</li><li>1 set of mounting clips</li></ul>
DI-CPCHB-REC-96	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>2 sets of end-caps</li><li>2 sets of mounting clips</li></ul>

See 10mm ROUNDED CORNER accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)

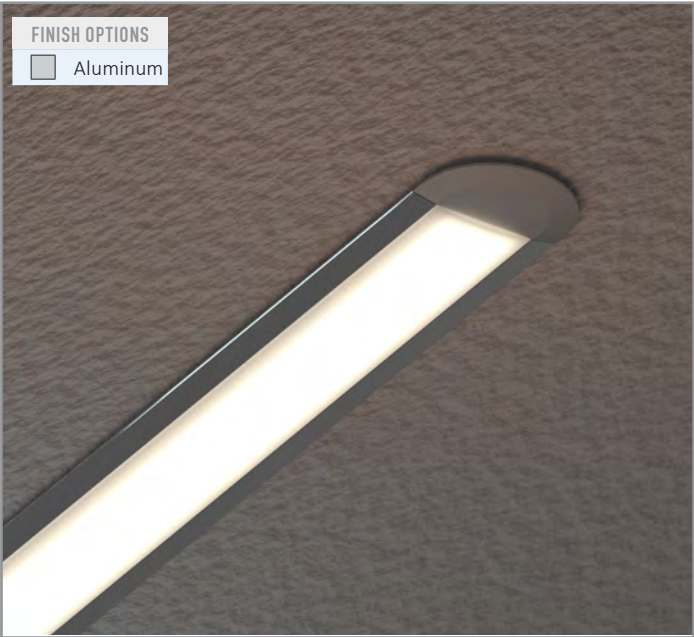

CHANNEL BUNDLE  
S1



TAPE LIGHT COMPATIBILITY:

BLAZE™ X  
VALENT® X  
BLAZE™ See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-S1-48AL	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>
DI-CPCHB-S1-90AL	<ul style="list-style-type: none"><li>90 in. channel &amp; frosted cover</li><li>End-caps &amp; mounting clips</li></ul>


See S1 accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)



TAPE LIGHT MOUNTING CHANNELS

NOTE: Channel Bundles are not interchangeable with each other. Check online specification sheet for connector compatibility.

CHANNEL BUNDLE  
REFLECTOR

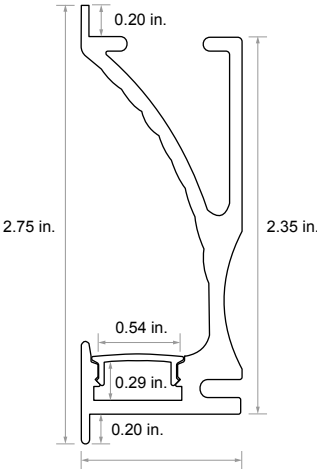

TAPE LIGHT COMPATIBILITY:


BLAZE™ X  
BLAZE™ See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-RFCTR-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>End-caps</li></ul>
DI-CPCHB-RFCTR-96	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>End-caps</li></ul>

See REFLECTOR accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)



CHANNEL BUNDLE  
90° SIDEVIEW



TAPE LIGHT COMPATIBILITY:


BLAZE™ X  
BLAZE™ See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-90SD-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>
DI-CPCHB-90SD-96	<ul style="list-style-type: none"><li>96 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>

See 90° SIDEVIEW accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)



CHANNEL BUNDLE  
WAVEFORM



TAPE LIGHT COMPATIBILITY:

BLAZE™ X  
BLAZE™ See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-WF-48	<ul style="list-style-type: none"><li>48 in. channel &amp; frosted cover</li><li>End-caps &amp; hardware</li></ul>

See WAVEFORM accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)






TAPE LIGHT MOUNTING CHANNELS

NOTE: Channel Bundles are not interchangeable with each other. Check online specification sheet for connector compatibility.

CHANNEL BUNDLE  
MUD-IN 1 INCH  
& 2 INCH

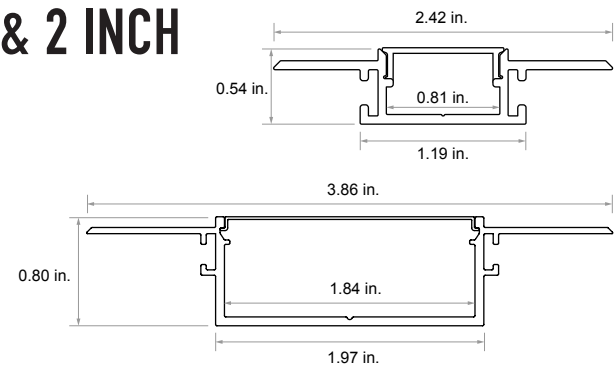

TAPE LIGHT COMPATIBILITY:

BLAZE™ X  
VALENT® X  
BLAZE™


See chart on page 44 for full compatibility list

SKU	PRODUCT INCLUDES
DI-CPCHB-MUD1-96	<ul style="list-style-type: none"><li>• 96 in. channel &amp; frosted cover</li><li>• End-caps &amp; hardware</li></ul>
DI-CPCHB-MUD2-96	<ul style="list-style-type: none"><li>• 96 in. channel &amp; frosted cover</li><li>• End-caps &amp; hardware</li></ul>

See MUD-IN 1 IN. & 2 IN. accessories on our website [www.DiodeLED.com](http://www.DiodeLED.com)

NEW

FINISH OPTIONS  
Aluminum

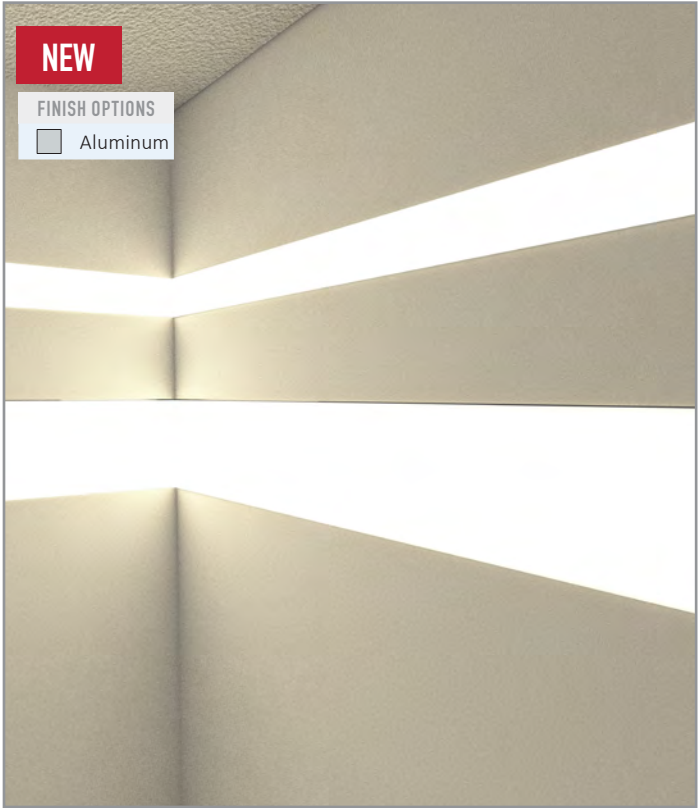

HYDROLOGIC Showroom  
Sarasota, Florida  
VALENT® X mounted in SLIM Channel



AdventHealth Rehabilitation Center  
Winter Park, Florida  
RLF Architecture Engineering Interiors  
DAZZLE® RGBW mounted in a Channel





# LED LIGHT GUIDE PANELS

## Display & General Illumination

Built to order in Reno, Nevada, Diode LED Light Guide Panels provide even, diffused light in a thin form factor due to a unique etched diffusion pattern. We customize the LED panel based on your specifications and dimensions. Light Guide Panels are equally useful for backlighting graphics, retail product displays, wall art, bars, stretch fabric ceilings, or translucent architectural elements such as walls.

- Cosmetics
- Product displays
- Wall Art
- Retail Displays
- Advertisement
- Signage


### COLOR

Popular CCTs & color changing options

- 2400K
- 2700K
- 3000K
- 3500K
- 4000K
- 5000K
- 6500K
- RGB
- RGBW
- TUNABLE


### CUSTOM SIZES

Up to 54 x 94 in. panels



### EDGE ILLUMINATION

Single or Double-Edge lighting options



MANUFACTURED BY  
**DIODE LED**  
IN RENO, NEVADA



**MADE IN USA**  
WITH FOREIGN PARTS

BACKLIGHTING  
RETAIL/SIGNAGE  
DISPLAY  
EXHIBITION  
ACCENT  
ARCHITECTURE  
INTERIOR DESIGN

### FEATURES & BENEFITS

- Made in USA with foreign parts
- Low-profile form factor
- Diffused and consistent lighting
- Customized dimensions

### QUICK SPECS

Voltage	12VDC & 24VDC
Dimming	Dimmable
Environment	Indoor
Warranty	5-Years
Certification	UL Listed

Visit the product page on the website for install guides, specification sheets, and photometric reports.



## LUXURY

Use architecture to create impactful, high-end environments and bring ambient lighting from unexpected areas.



## RETAIL

Highlight product and draw customer attention with encompassing light that improves the visual appeal of the retail environment.



## OFFICE

Impress customers, clients, and employees with clean, modern design.



## HOME

Get creative in a residential application by bringing light to every aspect of the living space.



## HOSPITALITY

Deliver inspiration to guests and visitors of an environment that promises a quality experience.

PRECISION-MADE TO YOUR  
CUSTOM SPECIFICATIONS


LET OUR EXPERIENCED TEAM HELP YOU BUILD  
YOUR NEXT LIGHT GUIDE PANEL PROJECT.

CALL  
877.490.4897

EMAIL  
solutions@elementalld.com



See spec sheet for products available as  
Made in USA with Foreign Parts






# GRAZE X™ FIXTURE

## THE PROMISE OF LINEAR OPTICS


Contemporary architectural design often features linear light, increasingly as the primary light source. Beam control and shaping of light is important to allow for nuanced lighting design. As linear LED technology advanced and adoption increased, expectations also increased for the optical performance of linear light.

The discreet form factor of low-voltage linear light has always been one of its major appeals.

Now, optical performance is the new focus.

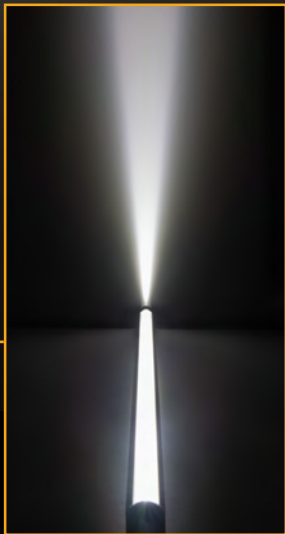


Typical Imported Optic

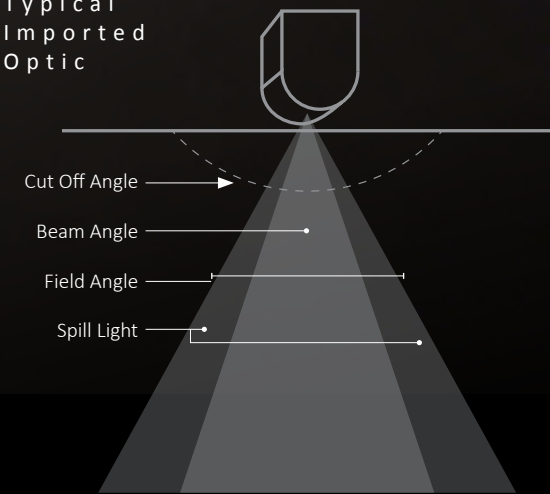

CELTECH™ Optic

Beams are internally collected & projected

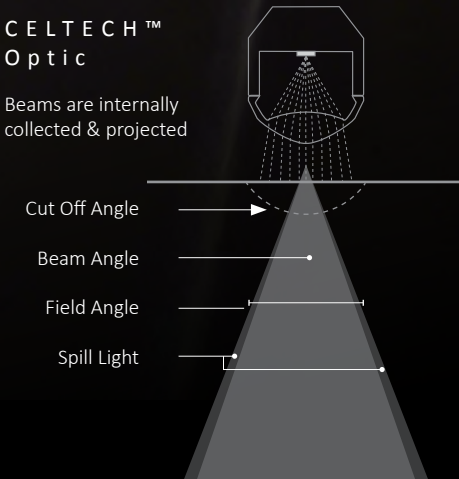

Our new patented CelTECH™ technology is a fixture design that creates a clean, precise beam by collimating light immediately after it leaves the light engine, which also increases overall efficiency of the fixture and requires less materials. This results in a beam with an exceptional aesthetic, delivered from a physically compact, modular fixture that can be manufactured domestically at a reasonable cost.



DI	-	VOLTAGE	-	SERIES	-	CCT	-	LENGTH	-	MODEL	-	MOUNT	-	COLOR	-	DRIVERS
DI	-	24V	-	300	-	24 (2400K) 27 (2700K) 30 (3000K) 35 (3500K) 42 (4200K) 50 (5000K) 63 (6300K)	-	Length option Example: 20 = 20 ft.	-	GRZX10	-	MC (Mounting Clip) AIM (Aiming Bracket)	-	AL (Aluminum) BLK (Black) WH (White)	-	MAG (Magnetic) LUT (Lutron) ELV (Electronic) 010 (0-10V) ND (Non-Dimming) SWX (Switchex)

EXAMPLE: 24V GRAZE™ X 300 SERIES 2400K 16 FT. FIXTURE WHITE COLOR WITH AIMING BRACKET AND SWITCHEX DRIVER																
DI	-	24V	-	300	-	24	-	16	-	GRZX10	-	AIM	-	WH	-	SWITCHEX
DI-24V-300-24-16-GRZX10-AIM-WH-SWITCHEX																

### FEATURES & BENEFITS

- Crisp optical performance with 10° beam spread
- Built to length, daisy-chain capable for long runs
- Pair with any Diode LED driver

### SPECIFICATIONS

Series	300	500	800
Wattage	2.8W/ft.	4.6W/ft.	7.2W/ft.
Max Run Length (per power feed)	41 Feet	30 Feet	19 Feet
Foot Candles			
1 Foot*	283	580	804
5 Feet*	11	23	32
10 Feet*	3	6	8
Peak Center Beam Candle Power	3965	6037	7917
Voltage	24VDC		
Warranty	12-year		
Environment	Indoor / Damp Location		
Certification	UL Listed 2108		

Visit the [product page](#) on the website for specification sheets, install guides, IES files, and photometric reports.



GRAZE X fixture with rotating aiming bracket





## HOW TO Choose Your Color Controller

### For app-based control projects


#### CASAMBI PWM4



DIMMER & COLOR CONTROLLER

Instructional videos for CASAMBI PWM4 can be found at [www.DiodeLED.com/video/casambi-video-series](http://www.DiodeLED.com/video/casambi-video-series)

- ✓ Home automation
- ✓ Dim white light
- ✓ Color changing - RGB(W)
- ✓ Tunable white
- ✓ Single color dimming
- ✓ Bluetooth control
- ✓ iOS/Android mobile app
- ✓ Programmable

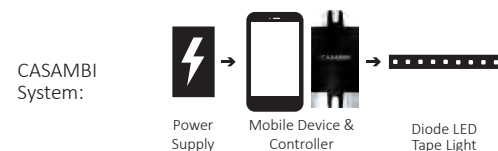

More accessories can be found online at [www.DiodeLED.com](http://www.DiodeLED.com)

#### SKU

CBU-PWM4


### For small to medium-scale applications

#### TOUCHDIAL™ CONTROL SYSTEM



REMOTE RGB(W) CONTROL & TUNABLE WHITE REMOTE

- ✓ Color changing - RGB(W)
- ✓ Tunable white
- ✓ Single color dimming
- ✓ Control up to 8 lighting zones
- ✓ Integrates with WiFi network
- ✓ iOS/Android mobile app

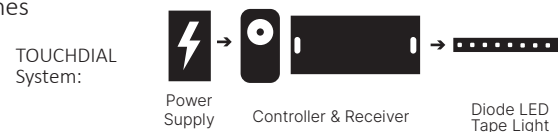

More accessories can be found online at [www.DiodeLED.com](http://www.DiodeLED.com)

#### SKU

DI-RF-REM-RGBW-4


DI-RF-REM-TW-4

### For professional commercial, residential & retail applications DMX SYSTEM



WALL MOUNT CONTROLLER & NICOLAUDIE STICK-DE3 DMX LED CONTROLLER

- ✓ Color changing - RGB(W)
- ✓ Single color dimming
- ✓ 3 zones (Wall Mount Controller)
- ✓ 10 zones (Nicolaudie)
- ✓ iOS/Android mobile app
- ✓ Programmable

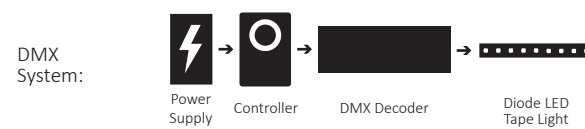

More accessories can be found online at [www.DiodeLED.com](http://www.DiodeLED.com)

#### SKU

DI-DMX-WIFI-WMUS-3Z-WH

DI-DMX-DE3

## REIGN® Low Voltage LED Dimmer

REIGN Wall Mount LED Dimmer Switches are the stylish companion for in-line dimming capability from non-dimmable drivers. REIGN Switches are easy to install, provide smooth dimming and fit right into a standard gang box for easy installation.

### FEATURES & BENEFITS


- 12V-24V PWM Dimmers
- Easy upgrade from a single on/off switch



VIEW FULL SPECIFICATION SHEETS AT [www.DiodeLED.com](http://www.DiodeLED.com)

SKU	VOLTAGE	FINISH	DIMENSIONS
DI-REIGN-WH	12-24VDC	Gloss White	2.15 x 4.15 x 1.47 IN.

### REIGN® Standard System Diagram

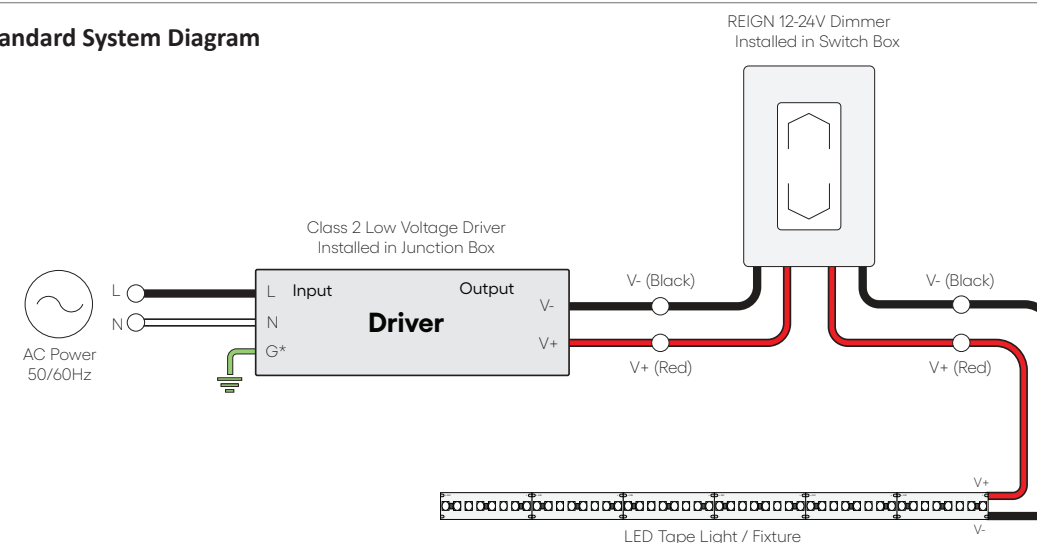



OMNIDRIVE® X Dimmable Drivers

Versatile driver for most high-performance dimming applications. Reduce complexity with universal input voltage and multiple dimming protocols in a single driver.

COMPATIBILITY NOTE


This driver is NOT COMPATIBLE with Pulse Width Modulation (PWM) dimmers such as our REIGN® Wall Mount LED Dimmer Switches or In-line LED Dimmer Switches. Visit [www.DiodeLED.com](http://www.DiodeLED.com) for a full compatibility guide.

FEATURES & BENEFITS

- ELV, Triac, and 0-10V dimming in a single driver
- 110-277VAC universal input
- No minimum load
- Minimum dimming level of 1-5%, depending on dimmer
- UL listed and Title 24 compliant
- 5-year warranty


QUICK SPECS

Environment	Indoor/Outdoor/Wet Location
Input Voltage	110-277VAC
Output Voltage	12VDC & 24VDC models
Connection Type	Hard-wired
Dimming	Forward Phase, Reverse Phase Dimming, and 0-10V Dimming
Certification	UL Listed & JA8 Compliant



12VDC

24VDC

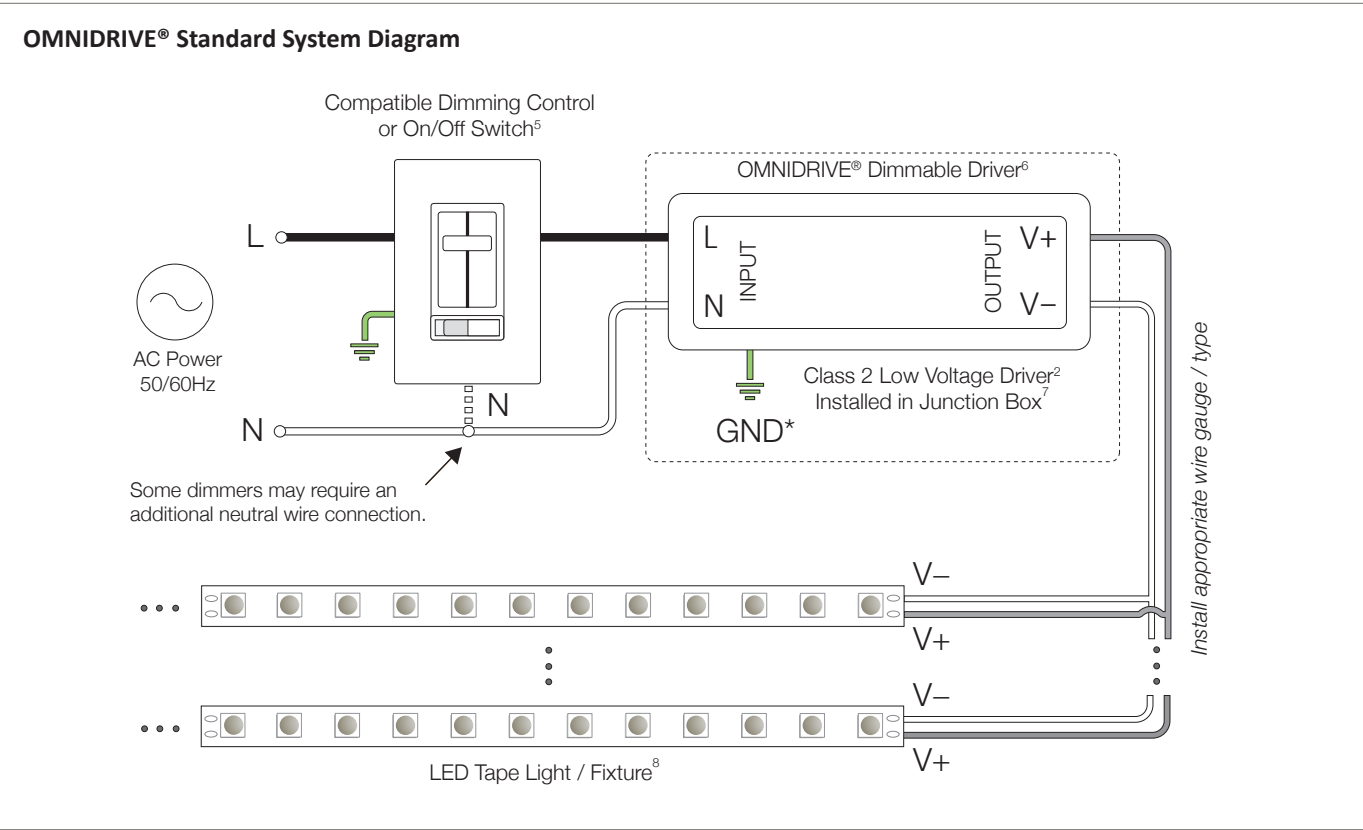

OMNIDRIVE® X Driver Model Options



12V OMNIDRIVE® X

VIEW FULL SPECIFICATION SHEETS AT [www.DiodeLED.com](http://www.DiodeLED.com)

OUTPUT	SKU	WATTAGE	CLASS 2	ENVIRONMENT	DIMENSIONS W/O J-BOX	DIMENSIONS W/ J-BOX (-J)
12VDC	DI-ODX-12V30W(-J)	30W	Yes	Indoor/Outdoor	2.1 x 6.1 x 0.8 in.	11.25 x 3.75 x 1.8 in.
	DI-ODX-12V60W(-J)	60W	Yes	Indoor/Outdoor	2.4 x 7 x 0.9 in.	13.5 x 4.5 x 2.25 in.
	DI-ODX-12V100W-J	100W	No	Indoor/Outdoor	2.7 x 9 x 1.7 in.	
	DI-ODX-12V120W-J	120W	No	Indoor/Outdoor		15 x 3.1 x 2.3 in.
	DI-ODX-12V200W-J	200W	No	Indoor/Outdoor	N/A	16 x 3.4 x 2.4 in.

24V OMNIDRIVE® X

VIEW FULL SPECIFICATION SHEETS AT [www.DiodeLED.com](http://www.DiodeLED.com)

OUTPUT	SKU	WATTAGE	CLASS 2	ENVIRONMENT	DIMENSIONS	DIMENSIONS W/ J-BOX (-J)
24VDC	DI-ODX-24V30W(-J)	30W	Yes	Indoor/Outdoor	2.1 x 6.1 x 0.8 in.	11.25 x 3.75 x 1.8 in.
	DI-ODX-24V60W(-J)	60W	Yes	Indoor/Outdoor	2.4 x 7 x 1 in.	13.5 x 4.5 x 2.25 in.
	DI-ODX-24V96W(-J)	96W	Yes	Indoor/Outdoor		9 x 2.8 x 1.8 in.
	DI-ODX-24V120W-J	120W	No	Indoor/Outdoor	N/A	15 x 3.1 x 2.3 in.
	DI-ODX-24V200W-J	200W	No	Indoor/Outdoor		16 x 3.4 x 2.4 in.



# Magnetic Dimmable Drivers

All-purpose dimmable driver for everyday tape light projects.

Diode LED has always made the most competitive tape light in the market. Now, we are manufacturing magnetic LED drivers that are just as competitive. Magnetic drivers are still the default, all-purpose dimmable driver for everyday tape light projects. There is no need to go to two different manufacturers to buy components for one light system.

### COMPATIBILITY NOTE


This driver is NOT COMPATIBLE with Pulse Width Modulation (PWM) dimmers such as our REIGN® Wall Mount LED Dimmer Switches or In-line LED Dimmer Switches. Visit [www.DiodeLED.com](http://www.DiodeLED.com) for a full compatibility guide.

### FEATURES & BENEFITS


- Compatible with many dimmers, on/off switches
- 5-year warranty
- Recommended with Diode LED tape light

### QUICK SPECS

Environment	Indoor/Outdoor
Input Voltage	120VAC & 277VAC models
Output Voltage	12VDC & 24VDC models
Connection Type	Hard-wired
Dimming	Forward Phase Dimming
Certification	ETL Listed

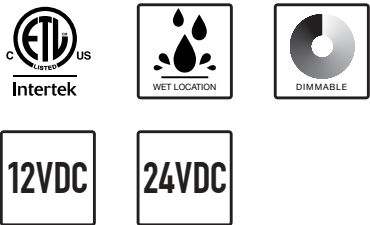

Magnetic Dimmable Driver Diagram

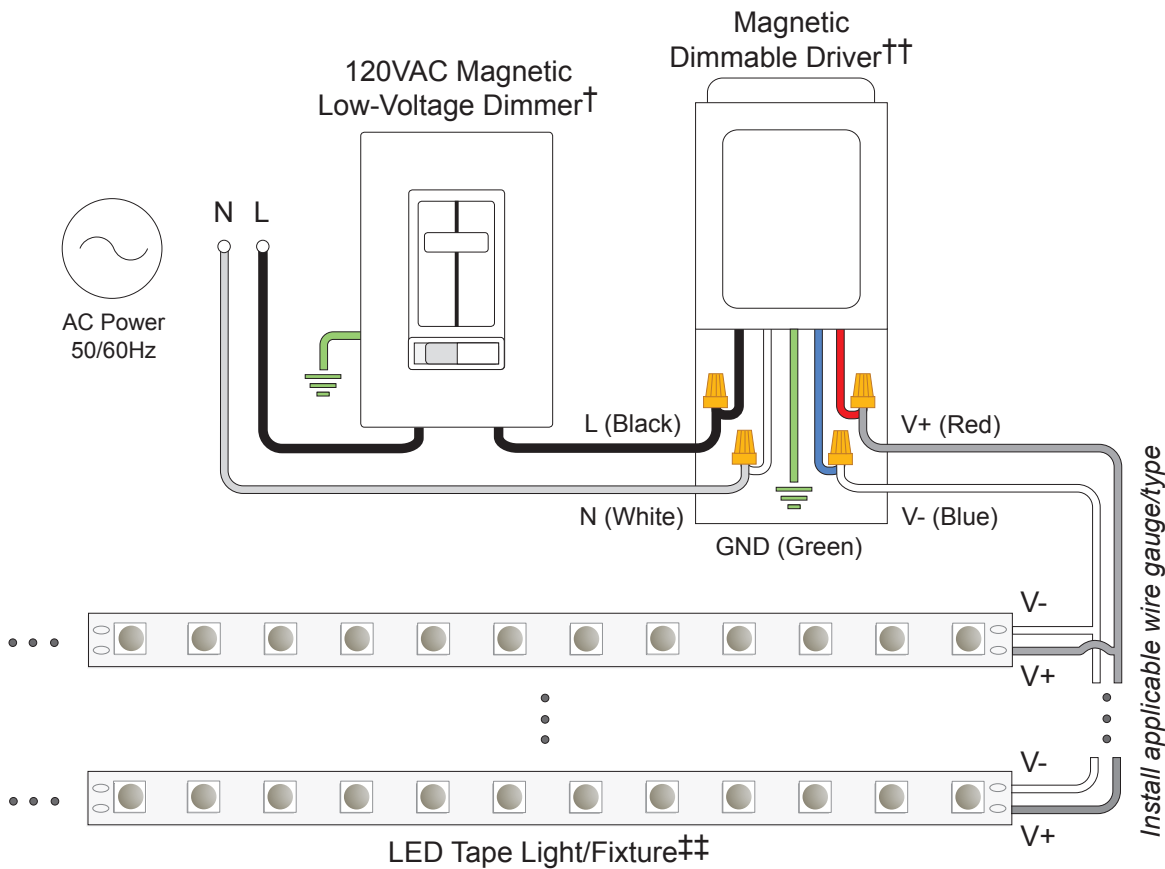

# Magnetic Dimmable Driver Model Options



### 12V Magnetic Dimmable Driver

VIEW FULL SPECIFICATION SHEETS AT [www.DiodeLED.com](http://www.DiodeLED.com)

INPUT VOLTAGE	OUTPUT	SKU	WATTAGE	CLASS 2	ENVIRONMENT	DIMENSIONS
120VAC	12VDC	DI-MLV-12V20W	20W	Yes	Outdoor/Indoor	2.2 x 2.2 x 5.7 in.
		DI-MLV-12V40W	40W	Yes	Outdoor/Indoor	2.2 x 2.2 x 5.7 in.
		DI-MLV-12V60W	60W	Yes	Outdoor/Indoor	2.6 x 2.3 x 6.6 in.
		DI-MLV-12V100W	100W	No	Outdoor/Indoor	3.1 x 2.8 x 9.9 in.
		DI-MLV-12V150W	150W	No	Outdoor/Indoor	3 x 3 x 9.8 in.
		DI-MLV-12V200W	200W	No	Outdoor/Indoor	3 x 3 x 9.8 in.
		DI-MLV-12V300W	300W	No	Outdoor/Indoor	4.2 x 3.5 x 9.8 in.
		DI-MLV-12V120W-MT	Multi-tap 120W (2x60W)	No	Outdoor/Indoor	3 x 3 x 9.8 in.
		DI-MLV-12V180W-MT	Multi-tap 180W (3x60W)	No	Outdoor/Indoor	3 x 3 x 9.8 in.
		DI-MLV-12V300W-MT	Multi-tap 300W (5x60W)	No	Outdoor/Indoor	4.2 x 3.5 x 9.8 in.
277VAC	12VDC	DI-MLV-12V20W-277	20W	Yes	Outdoor/Indoor	2.2 x 2.2 x 5.7 in.
		DI-MLV-12V60W-277	60W	Yes	Outdoor/Indoor	2.6 x 2.3 x 6.6 in.
		DI-MLV-12V100W-277	100W	No	Outdoor/Indoor	3 x 3 x 9.8 in.
		DI-MLV-12V200W-277	200W	No	Outdoor/Indoor	4.2 x 3.5 x 9.8 in.
		DI-MLV-12V300W-277	300W	No	Outdoor/Indoor	4.2 x 3.5 x 9.8 in.

### 24V Magnetic Dimmable Driver

VIEW FULL SPECIFICATION SHEETS AT [www.DiodeLED.com](http://www.DiodeLED.com)

INPUT VOLTAGE	OUTPUT	SKU	WATTAGE	CLASS 2	ENVIRONMENT	DIMENSIONS
120VAC	24VDC	DI-MLV-24V20W	20W	Yes	Outdoor/Indoor	2.2 x 2.2 x 5.7 in.
		DI-MLV-24V40W	40W	Yes	Outdoor/Indoor	2.2 x 2.2 x 5.7 in.
		DI-MLV-24V60W	60W	Yes	Outdoor/Indoor	2.6 x 2.3 x 6.6 in.
		DI-MLV-24V96W	96W	Yes	Outdoor/Indoor	2.6 x 2.3 x 6.6 in.
		DI-MLV-24V150W	150W	No	Outdoor/Indoor	3 x 3 x 9.8 in.
		DI-MLV-24V200W	200W	No	Outdoor/Indoor	3 x 3 x 9.8 in.
		DI-MLV-24V300W	300W	No	Outdoor/Indoor	4.2 x 3.5 x 9.8 in.
		DI-MLV-24V192W-MT	Multi-tap 192W (2x96W)	No	Outdoor/Indoor	4.2 x 3.2 x 9.8 in.
		DI-MLV-24V288W-MT	Multi-tap 288W (3x96W)	No	Outdoor/Indoor	4.2 x 3.2 x 9.8 in.
		DI-MLV-24V20W-277	20W	Yes	Outdoor/Indoor	2.2 x 2.2 x 5.7 in.
277VAC	24VDC	DI-MLV-24V40W-277	40W	Yes	Outdoor/Indoor	2.2 x 2.2 x 5.7 in.
		DI-MLV-24V96W-277	96W	Yes	Outdoor/Indoor	3 x 3 x 9.8 in.
		DI-MLV-24V200W-277	200W	No	Outdoor/Indoor	4.2 x 3.5 x 9.8 in.
		DI-MLV-24V300W-277	300W	No	Outdoor/Indoor	4.2 x 3.5 x 9.8 in.
		DI-MLV-24V300W-277	300W	No	Outdoor/Indoor	4.2 x 3.5 x 9.8 in.



# MikroDIM™ Electronic Dimmable Driver

A compact, dimmable power supply with no minimum load. State-of-the-art design is patented with built-in short circuit protection and industry-leading dimming performance.

### FEATURES & BENEFITS


- No minimum load
- Compact design
- ELV Dimming

### QUICK SPECS


Environment	Indoor
Input Voltage	120VAC
Output Voltage	12VDC & 24VDC models
Connection Type	Hard-wired
Dimming	ELV Dimming (See compatibility on specification sheet)
Certification	UL Component Recognized UL Listed w/ J-Box

### COMPATIBILITY NOTE

This driver is NOT COMPATIBLE with Pulse Width Modulation (PWM) dimmers such as our REIGN® Wall Mount LED Dimmer Switches or In-line LED Dimmer Switches. Visit [www.DiodeLED.com](http://www.DiodeLED.com) for a full compatibility guide.



### MikroDIM® Electronic Dimmable Driver Diagram

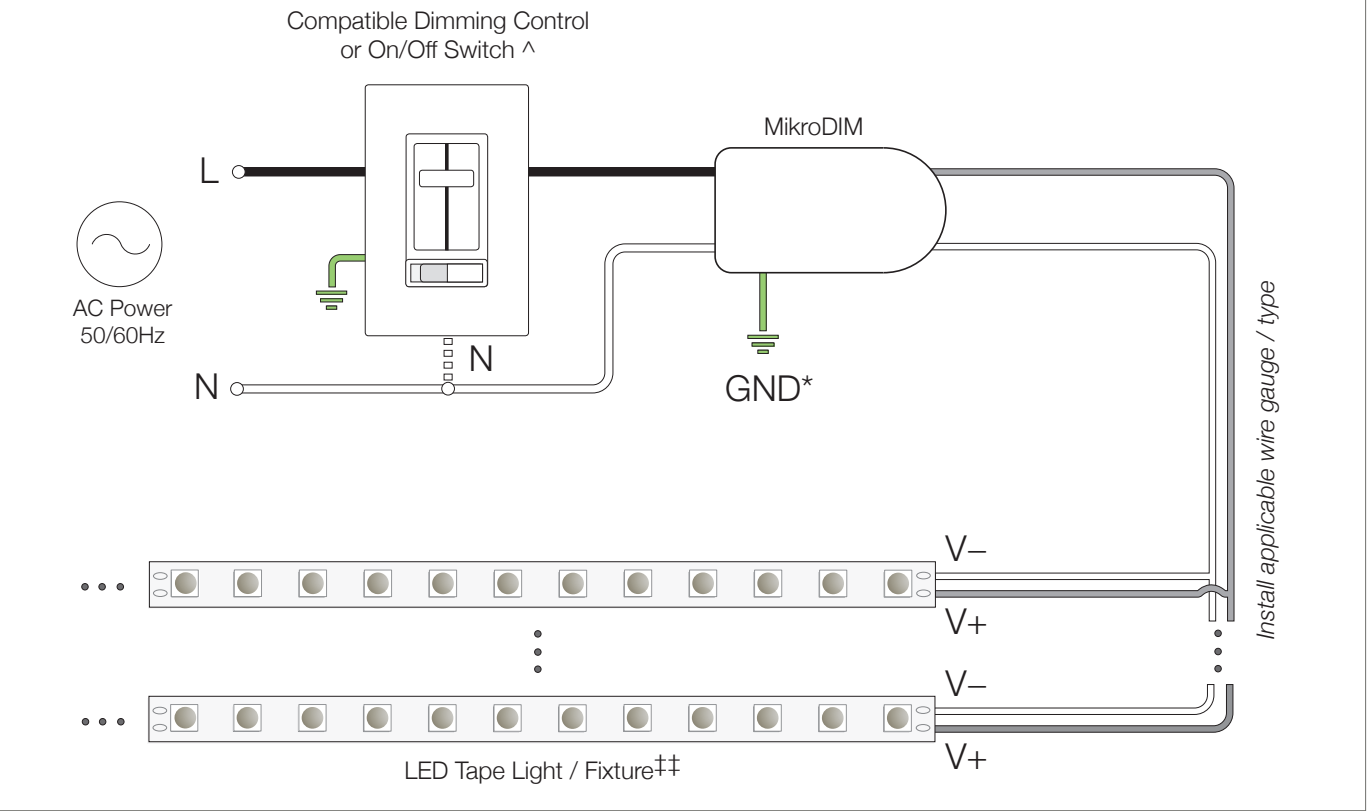

# MikroDIM™ Driver Model Options



### 12V MikroDIM™

[VIEW FULL SPECIFICATION SHEETS AT www.DiodeLED.com](http://www.DiodeLED.com)

OUTPUT	SKU (DRIVER ONLY)	WATTAGE	ENVIRONMENT	DIMENSIONS
12VDC	DI-MKD-12V60W	60W	Indoor	3.0 x 1.3 x 1.0

### 24V MikroDIM™


[VIEW FULL SPECIFICATION SHEETS AT www.DiodeLED.com](http://www.DiodeLED.com)

OUTPUT	SKU (DRIVER ONLY)	WATTAGE	ENVIRONMENT	DIMENSIONS
24VDC	DI-MKD-24V60W	60W	Indoor	3.0 x 1.3 x 1.0

# Lo-Pro Junction Box for MikroDIM



IDEAL FOR  
SMALL SPACES  
WHERE A SMALL  
FORM FACTOR  
IS REQUIRED

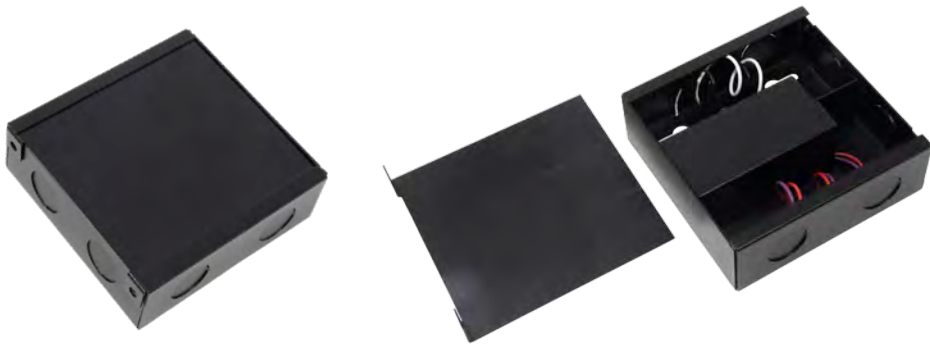


SKU	DESCRIPTION	DIMENSIONS
DI-MKD60W-12-LPMKD	Lo-Pro Junction Box with MikroDIM Driver Combo - 12V 60W	4.25 x 4.34 x 1.48
DI-MKD60W-24-LPMKD	Lo-Pro Junction Box with MikroDIM Driver Combo - 24V 60W	4.25 x 4.34 x 1.48
DI-JBOX-LPMKD	Lo-Pro Junction Box for MikroDIM (Junction box only)	4.25 x 4.34 x 1.48



# SWITCHEX® Driver + Dimmer Switch

The patented SWITCHEX combines an LED dimmer switch and LED power supply into a single integrated unit. The SWITCHEX Dimmer + Driver accepts 120 VAC and converts it to low-voltage DC, all within a standard electrical box. With power options up to 100W, it is a true revolutionary step forward for power and control of LED applications.

Fits in standard electrical boxes.

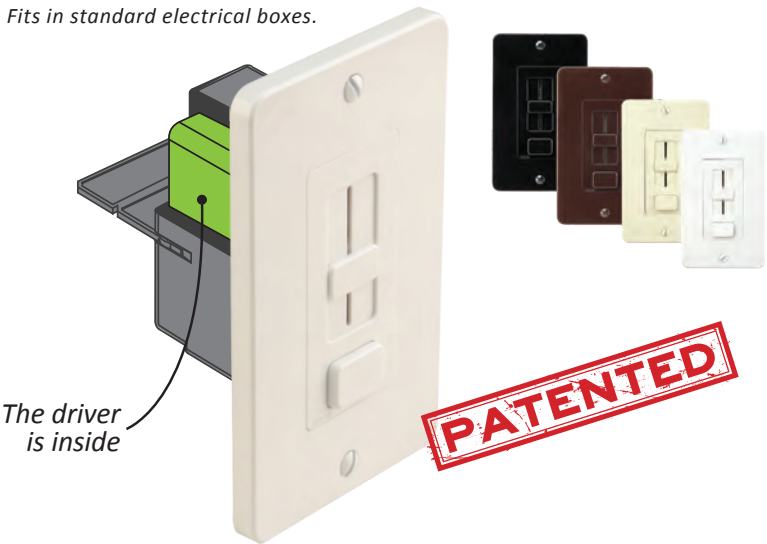

## FEATURES & BENEFITS

- Simplifies your LED installation
- Eliminates compatibility issues between drivers and switches
- Superior LED dimming performance (100% – 5%)
- Preset dimmer with on/off switch

## QUICK SPECS


Environment	Indoor
Input Voltage	120VAC
Output Voltage	12VDC & 24VDC models
Connection Type	Hard-wired
Mounting	Single-Gang Box
Certifications	UL Listed 2108




WINNER OF THE ARCHITECTURAL SSL PRODUCT INNOVATION AWARD



## SWITCHEX® Driver and Dimmer Switch Diagram

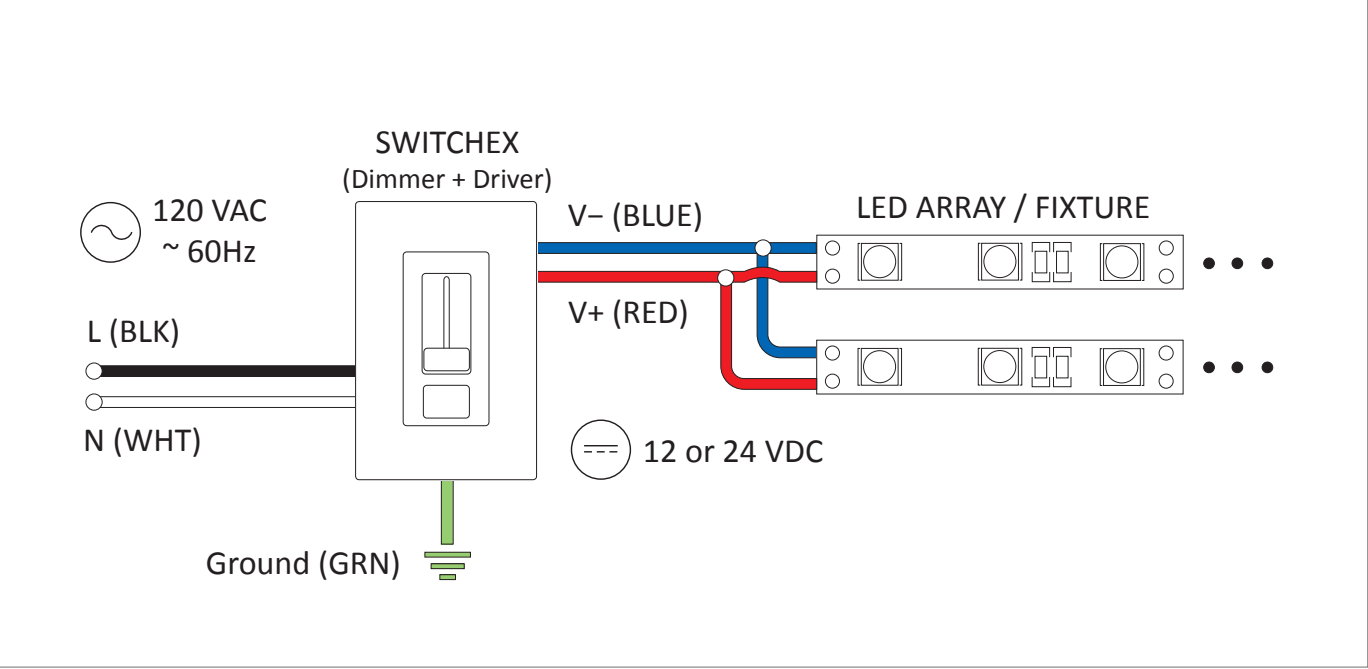

# SWITCHEX® Options

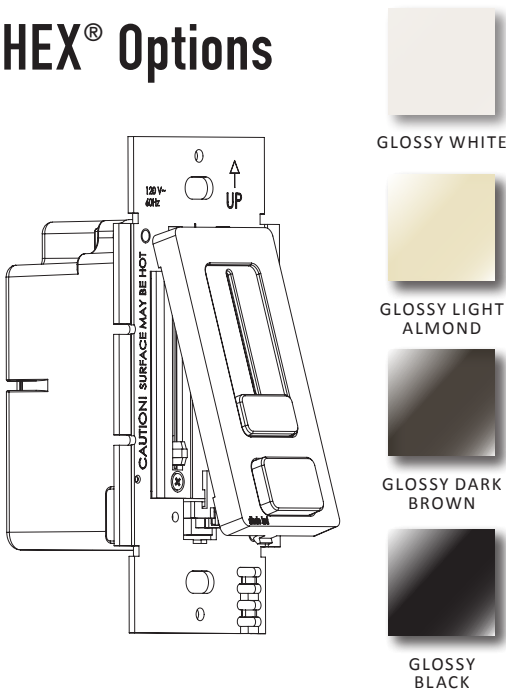

3 face plates options are included with SWITCHEX. Trim plates and the black finish option are sold separately.

## SWITCHEX Driver + Dimmer Switch

VIEW FULL SPECIFICATION SHEETS AT [www.DiodeLED.com](http://www.DiodeLED.com)

INPUT	OUTPUT	SKU	WATTAGE
120VAC	12VDC	DI-12V-SE-40W	40W
		DI-12V-SE-60W	60W
	24VDC	DI-24V-SE-60W	60W
		DI-24V-SE-100W	100W

(Four Trim Plate Color Options)



## SWITCHEX Trim Plate

SKU	FINISH
DI-SE-TP-BR	Glossy Dark Brown
DI-SE-TP-LA	Glossy Light Almond
DI-SE-TP-WH	Glossy White
DI-SE-FP-BL	Glossy Black (face plate & trim plate sold together)
DI-SE-FP-3	SWITCHEX Trim Plate Kit - White/Almond/Brown



CBU-PWM4.....	35	DI-0890.....	41	DI-HLS-MTBR.....	29
CBU-PWM4.....	58	DI-0890-5.....	41	DI-HLS-MTCH.....	29
CKT3-EXT.....	41	DI-0890-25.....	41	DI-HLS-SP24.....	29
CKT3-EXT-5.....	41	DI-0891.....	41	DI-HLS-TC.....	29
CKT3-EXT-25.....	41	DI-0891-5.....	41	DI-HLS-XC.....	29
CKT3-SPLE.....	41	DI-0891-25.....	41	DI-JBOX-LPMKD.....	65
CKT3-SPLE-5.....	41	DI-0892.....	41	DI-LGP.....	54
CKT3-SPLE-25.....	41	DI-0892-5.....	41	DI-MKD-12V60W.....	65
CKT24-EXT.....	41	DI-0892-25.....	41	DI-MKD-24V60W.....	65
CKT24-EXT-5.....	41	DI-0895.....	41	DI-MKD60W-12-LPMKD.....	65
CKT24-EXT-25.....	41	DI-0895-5.....	41	DI-MKD60W-24-LPMKD.....	65
CKT24-SPLE.....	41	DI-0895-25.....	41	DI-MLV-12V20W.....	63
CKT24-SPLE-5.....	41	DI-1090.....	41	DI-MLV-12V20W-277.....	63
CKT24-SPLE-25.....	41	DI-1090-5.....	41	DI-MLV-12V40W.....	63
DI-12V-BLBSC1-**.....	19	DI-1090-25.....	41	DI-MLV-12V60W.....	63
DI-12V-BLBSC1-**-W**.....	21	DI-1091.....	41	DI-MLV-12V60W-277.....	63
DI-12V-BLBSC2-**.....	19	DI-1091-5.....	41	DI-MLV-12V100W.....	63
DI-12V-BLBSC2-**-W**.....	21	DI-1091-25.....	41	DI-MLV-12V100W-277.....	63
DI-12V-BLX1-**.....	15	DI-CPCHA-SLR-48.....	50	DI-MLV-12V120W-MT.....	63
DI-12V-BLX2-**.....	15	DI-CPCHA-SLR96.....	50	DI-MLV-12V150W.....	63
DI-12V-BLX3-**.....	15	DI-CPCHB-16MM-48.....	47	DI-MLV-12V180W-MT.....	63
DI-12V-SE-40W.....	67	DI-CPCHB-16MM-96.....	47	DI-MLV-12V200W.....	63
DI-12V-SE-60W.....	67	DI-CPCHB-45-48.....	47	DI-MLV-12V200W-277.....	63
DI-12V-STMLT-**-W.....	27	DI-CPCHB-45-96.....	47	DI-MLV-12V300W.....	63
DI-24V-BLBSC1-**.....	19	DI-CPCHB-45DCO-48.....	49	DI-MLV-12V300W-277.....	63
DI-24V-BLBSC1-**-W**.....	21	DI-CPCHB-45DCO-96.....	49	DI-MLV-12V300W-MT.....	63
DI-24V-BLBSC2-**.....	19	DI-CPCHB-90SD-48.....	51	DI-MLV-12V4V20W.....	63
DI-24V-BLBSC2-**-W**.....	21	DI-CPCHB-90SD-96.....	51	DI-MLV-24V20W-277.....	63
DI-24V-BLBSC3-**.....	19	DI-CPCHB-CAN-48(*).....	45	DI-MLV-24V40W.....	63
DI-24V-BLBSC3-**-W**.....	21	DI-CPCHB-CAN-96(*).....	45	DI-MLV-24V40W-277.....	63
DI-24V-BLSEL-**.....	35	DI-CPCHB-DU-48.....	46	DI-MLV-24V60W.....	63
DI-24V-BLX1-**.....	15	DI-CPCHB-GZRN8-48.....	47	DI-MLV-24V96W.....	63
DI-24V-BLX2-**.....	15	DI-CPCHB-GZRN8-96.....	47	DI-MLV-24V96W-277.....	63
DI-24V-BLX3-**.....	15	DI-CPCHB-MUD1-96.....	52	DI-MLV-24V150W.....	63
DI-24V-DRGB-**.....	39	DI-CPCHB-MUD2-96.....	52	DI-MLV-24V192W-MT.....	63
DI-24V-**-***.GRZX10.....	56	DI-CPCHB-RC10-48.....	49	DI-MLV-24V200W.....	63
DI-24V-HLS-**.....	29	DI-CPCHB-RC10-96.....	49	DI-MLV-24V200W-277.....	63
DI-24V-HLSP-**.....	29	DI-CPCHB-RC20-48.....	49	DI-MLV-24V288W-MT.....	63
DI-24V-RGBW4-**.....	37	DI-CPCHB-RC20-96.....	49	DI-MLV-24V300W.....	63
DI-24V-SE-60W.....	67	DI-CPCHB-RDART-79.....	46	DI-MLV-24V300W-277.....	63
DI-24V-SE-100W.....	67	DI-CPCHB-RDWAL-79.....	46	DI-NB-96M-CNCT.....	32
DI-24V-SE-NBL1-**.....	31	DI-CPCHB-REC-48.....	50	DI-ODX-12V30W(-J).....	61
DI-24V-SE-NBL2-**.....	31	DI-CPCHB-REC-96.....	50	DI-ODX-12V60W(-J).....	61
DI-24V-SE-NBL4-**.....	31	DI-CPCHB-RFCTR-48.....	51	DI-ODX-12V100W-J.....	61
DI-24V-STMLT-**.....	27	DI-CPCHB-RFCTR-96.....	51	DI-ODX-12V120W-J.....	61
DI-24V-STMLT-**-W.....	27	DI-CPCHB-S1-48AL.....	50	DI-ODX-12V200W-J.....	61
DI-24V-TE-AT02-**.....	25	DI-CPCHB-S1-90AL.....	50	DI-ODX-24V30W(-J).....	61
DI-24V-TE-NBL1-**.....	31	DI-CPCHB-SCNC-48.....	48	DI-ODX-24V60W(-J).....	61
DI-24V-TE-NBL2-**.....	31	DI-CPCHB-SCNC-96.....	48	DI-ODX-24V96W(-J).....	61
DI-24V-TE-NBL4-**.....	31	DI-CPCHB-SL-48(*).....	45	DI-ODX-24V120W-J.....	61
DI-24V-VLX1-**.....	11	DI-CPCHB-SL-96(*).....	45	DI-ODX-24V200W-J.....	61
DI-24V-VLX2-**.....	11	DI-CPCHB-SQ-48(*).....	45	DI-REIGN-WH.....	59
DI-24V-VLX3-**.....	11	DI-CPCHB-SQ-96(*).....	45	DI-RF-REM-RGBW-4.....	58
DI-24V-VLX5-**.....	11	DI-CPCHB-SQC10-48.....	48	DI-RF-REM-TW-4.....	35
DI-24V-VLX5-**-W**.....	13	DI-CPCHB-SQC10-96.....	48	DI-RF-REM-TW-4.....	58
DI-24V-VLX8-**.....	11	DI-CPCHB-SQC20-48.....	48	DI-RGBW-CKT-LNK.....	41
DI-120V-INFBSC3-**.....	23	DI-CPCHB-SQC20-96.....	48	DI-RGBW-CKT-LNK-5.....	41
DI-0766.....	39	DI-CPCHB-WF-48.....	51	DI-RGBW-CKT-LNK-25.....	41
DI-0778.....	39	DI-CPCHPB-RDCL-79.....	46	DI-RGBW-WACY.....	37
DI-0842-25.....	39	DI-DMX-DE3.....	58	DI-RGBW-WEXT.....	37
DI-0885.....	41	DI-DMX-WIFI-WMDC-1ZWH.....	35	DI-SE-FP-3.....	67
DI-0885-5.....	41	DI-DMX-WIFI-WMUS-3Z-WH.....	58	DI-SE-FP-BL.....	67
DI-0885-25.....	41	DI-HLS-EC-10.....	29	DI-SE-NB-3JPR.....	32
DI-0886.....	41	DI-HLS-IC.....	29	DI-SE-NB-6JPR.....	32
DI-0886-5.....	41	DI-HLS-JP4.....	29	DI-SE-NB-12JPR.....	32
DI-0886-25.....	41	DI-HLS-JP6.....	29	DI-SE-NB-24JPR.....	32
DI-0887.....	41	DI-HLS-JP12.....	29	DI-SE-NB-BUC-16.....	32
DI-0887-5.....	41	DI-HLS-JP24.....	29	DI-SE-NB-BWC-EC.....	32
DI-0887-25.....	41	DI-HLS-LC.....	29	DI-SE-NB-FLCH-WH.....	32



DI-SE-NB-MTCH.....	32	DI-SE-NB-SDWC-EC.....	32
DI-SE-NB-SDWC-EC.....	32	DI-SE-NB-STWC-EC.....	32
DI-SE-NB-TTT-2.....	32	DI-SE-NB-TUC-16.....	32
DI-SE-NB-TUC-16.....	32	DI-SE-TP-BR.....	67
DI-SE-TP-BR.....	67	DI-SE-TP-LA.....	67
DI-SE-TP-LA.....	67	DI-SE-TP-WH.....	67
DI-STMLT-CKT-SPL24-1.....	27	DI-STMLT-CKT-TTT-1.....	27
DI-STMLT-CKT-TTT-1.....	27	DI-STMLT-CKT-TTT-EXT.....	27
DI-TB8-6JPR-TTT-1.....	40	DI-TB8-6JPR-TTT-25.....	40
DI-TB8-6JPR-TTT-25.....	40	DI-TB8-6JPR-TTT-25B.....	40
DI-TB8-6JPR-TTT-25B.....	40	DI-TB8-60JPR-TTT-1.....	40
DI-TB8-60JPR-TTT-1.....	40	DI-TB8-60JPR-TTT-25.....	40
DI-TB8-60JPR-TTT-25.....	40	DI-TB8-60JPR-TTT-25B.....	40
DI-TB8-60SPL-TTW-1.....	40	DI-TB8-60SPL-TTW-25.....	40
DI-TB8-60SPL-TTW-25.....	40	DI-TB8-60SPL-TTW-25B.....	40
DI-TB8-90-TTT-1.....	40	DI-TB8-90-TTT-1.....	40
DI-TB8-CONN-TTT-1.....	40	DI-TB8-CONN-TTT-1.....	40
DI-TB8-CONN-TTT-5.....	40	DI-TB8-CONN-TTT-25.....	40
DI-TB8-CONN-TTT-25.....	40	DI-TB8-CONN-TTT-25-BULK.....	40
DI-TB8-CONN-TTT-25-BULK.....	40	DI-TB8-CONN-TTW-1.....	40
DI-TB8-CONN-TTW-1.....	40	DI-TB8-CONN-TTW-5.....	40
DI-TB8-CONN-TTW-5.....	40	DI-TB8-CONN-TTW-25.....	40
DI-TB8-CONN-TTW-25.....	40	DI-TB8-CONN-TTW-25-BULK.....	40
DI-TB12-90-TTT-1.....	41	DI-TB12-CONN-TTT.....	41
DI-TB12-CONN-TTT.....	41	DI-TB12-CONN-TTT-5.....	41
DI-TB12-CONN-TTT-5.....	41	DI-TB12-CONN-TTT-25.....	41
DI-TB12-CONN-TTT-25.....	41	DI-TB12-CONN-TTT-25-BULK.....	41
DI-TB12-CONN-TTT-25-BULK.....	41	DI-TB12-CONN-TTW.....	41
DI-TB12-CONN-TTW.....	41	DI-TB12-CONN-TTW-5.....	41
DI-TB12-CONN-TTW-5.....	41	DI-TB12-CONN-TTW-25.....	41
DI-TB12-CONN-TTW-25.....	41	DI-TE-NB-3JPR.....	32
DI-TE-NB-3JPR.....	32	DI-TE-NB-6JPR.....	32
DI-TE-NB-6JPR.....	32	DI-TE-NB-12JPR.....	32
DI-TE-NB-12JPR.....	32	DI-TE-NB-24JPR.....	32
DI-TE-NB-24JPR.....	32	DI-TE-NB-BUC-16.....	32
DI-TE-NB-BUC-16.....	32	DI-TE-NB-BWC-EC.....	32
DI-TE-NB-BWC-EC.....	32	DI-TE-NB-FLCH-WH.....	32
DI-TE-NB-TTT-2.....	32	DI-TE-NB-TUC-16.....	32
DI-TE-NB-TUC-16.....	32	DI-WLMC-RGB.....	39
DI-WLMC-RGB.....	39	DI-WPSL.....	39



Little Collins, NYC



2021 CATALOG  
DI-CTLG-2021-Q4



Luke Lamp Co.  
Richard Anuszkiewicz / Monogram Appliances  
Photo credit: Padgett & Company

2021 DIODE LED



885 Trademark Drive, Suite 200  
Reno, Nevada 89521  
Ph: 877.817.6028 | Fax: 415.592.1596  
info@DiodeLED.com  
**www.DiodeLED.com**

© 2021 Elemental LED, Inc. All rights reserved.  
Specifications are subject to change without notice.