




- CRI 90+
- 2-Step MacAdam's ellipse, single binning

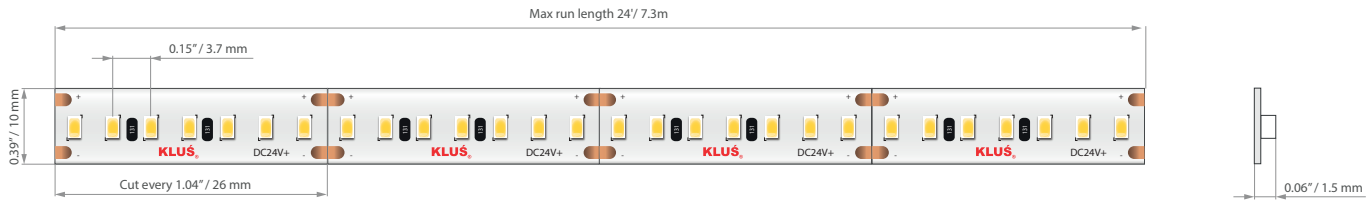

TECHNICAL DATA

Model	Volt	Color Temperature	Watts per foot / per meter	Lumen Output per foot / per meter	Beam Angle	Diodes per foot / per meter	Chip Type	CRI	Max run length (feet / meter)
K-22-0530-HD-24V	24	2200	1.6W/F 5.3W/M	92/LF 301/LM	120°	81/F 266/M	Epistar 2110	90+	24' / 7.3m
K-25-0530-HD-24V		2500		99/LF 324/LM					
K-27-0530-HD-24V		2700		142/LF 465/LM					
K-30-0530-HD-24V		3000		155/LF 508/LM					
K-35-0530-HD-24V		3500		160/LF 524/LM					
K-40-0530-HD-24V		4000		160/LF 524/LM					
K-50-0530-HD-24V		5000		170/LF 557/LM					



WIRE OPTIONS

36"-72" wire leads (20 gauge jacketed wire)

