










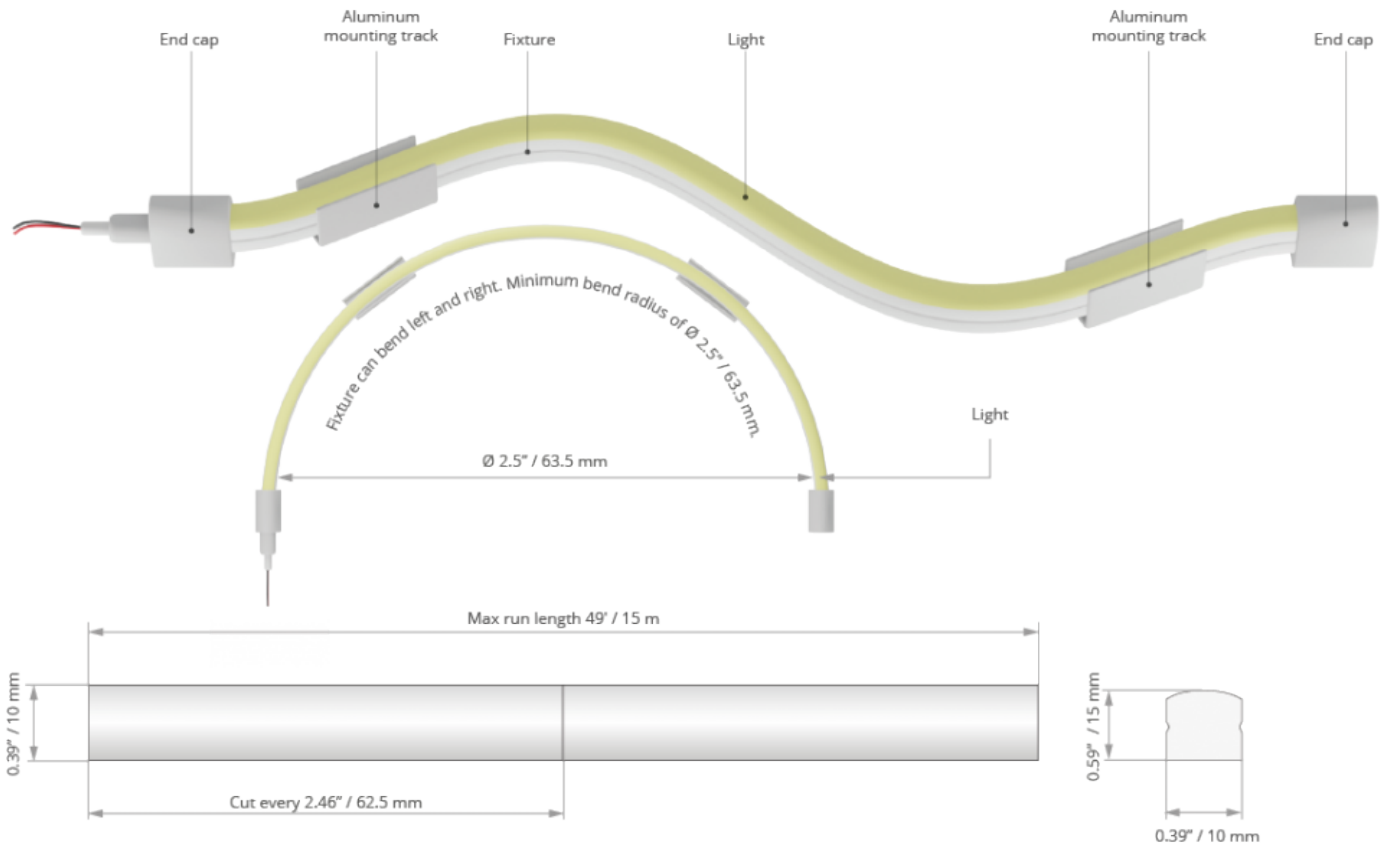









- UL Listed
- 3-Step MacAdam's ellipse, single binning
- L70- Over 40,000 hours
- Reverse voltage protection
- Minimum 2oz copper PCB




* Custom lengths must be made by the factory to maintain the UL listing


TECHNICAL DATA

Model	IP protection	Power consumption	Color temperature	Lumen output	Diode QTY per foot	Input voltage	Beam Angle	Max run length	LED width
K-NF-27-0768-24V-5M	IP 67	2.34 W/ft	2700 K	60 lm/ft	34 pcs/ft	24 V	132 °	16'4"	10 mm
K-NF-27-0768-24V-10M	IP 67	2.34 W/ft	2700 K	60 lm/ft	34 pcs/ft	24 V	132 °	32'	10 mm
K-NF-27-0768-24V-15M	IP 67	2.34 W/ft	2700 K	60 lm/ft	34 pcs/ft	24 V	132 °	49'	10 mm
K-NF-30-0768-24V-5M	IP 67	2.34 W/ft	3000 K	65 lm/ft	34 pcs/ft	24 V	132 °	16'4"	10 mm
K-NF-30-0768-24V-10M	IP 67	2.34 W/ft	3000 K	65 lm/ft	34 pcs/ft	24 V	132 °	32'	10 mm
K-NF-30-0768-24V-15M	IP 67	2.34 W/ft	3000 K	65 lm/ft	34 pcs/ft	24 V	132 °	49'	10 mm
K-NF-40-0768-24V-5M	IP 67	2.34 W/ft	4000 K	74 lm/ft	34 pcs/ft	24 V	132 °	16'4"	10 mm
K-NF-40-0768-24V-10M	IP 67	2.34 W/ft	4000 K	74 lm/ft	34 pcs/ft	24 V	132 °	32'	10 mm

Model	IP protection	Power consumption	Color temperature	Lumen output	Diode QTY per foot	Input voltage	Beam Angle	Max run length	LED width
K-NF-40-0768-24V-15M	IP 67	2.34 W/ft	4000 K 	74 lm/ft	34 pcs/ft	24 V	132 °	49'	10 mm
K-NF-50-0768-24V-5M	IP 67	2.34 W/ft	5000 K 	73 lm/ft	34 pcs/ft	24 V	132 °	16'4"	10 mm
K-NF-50-0768-24V-10M	IP 67	2.34 W/ft	5000 K 	73 lm/ft	34 pcs/ft	24 V	132 °	32'	10 mm
K-NF-50-0768-24V-15M	IP 67	2.34 W/ft	5000 K 	73 lm/ft	34 pcs/ft	24 V	132 °	49'	10 mm
K-NF-BLUE-0768-24V-5M	IP 67	2.34 W/ft	Blue 	21 lm/ft	34 pcs/ft	24 V	132 °	16'4"	10 mm
K-NF-BLUE-0768-24V-10M	IP 67	2.34 W/ft	Blue 	21 lm/ft	34 pcs/ft	24 V	132 °	32'	10 mm
K-NF-BLUE-0768-24V-15M	IP 67	2.34 W/ft	Blue 	21 lm/ft	34 pcs/ft	24 V	132 °	49'	10 mm
K-NF-GREEN-0768-24V-5M	IP 67	2.34 W/ft	Green 	338 lm/ft	34 pcs/ft	24 V	132 °	16'4"	10 mm
K-NF-GREEN-0768-24V-10M	IP 67	2.34 W/ft	Green 	338 lm/ft	34 pcs/ft	24 V	132 °	32'	10 mm
K-NF-GREEN-0768-24V-15M	IP 67	2.34 W/ft	Green 	338 lm/ft	34 pcs/ft	24 V	132 °	49'	10 mm
K-NF-RED-0768-24V-5M	IP 67	2.34 W/ft	Red 	50 lm/ft	34 pcs/ft	24 V	132 °	16'4"	10 mm
K-NF-RED-0768-24V-10M	IP 67	2.34 W/ft	Red 	50 lm/ft	34 pcs/ft	24 V	132 °	32'	10 mm
K-NF-RED-0768-24V-15M	IP 67	2.34 W/ft	Red 	50 lm/ft	34 pcs/ft	24 V	132 °	49'	10 mm
K-NF-YELLOW-0768-5M	IP 67	2.34 W/ft	Yellow 	96 lm/ft	34 pcs/ft	24 V	132 °	16'4"	10 mm
K-NF-YELLOW-0768-24V-10M	IP 67	2.34 W/ft	Yellow 	96 lm/ft	34 pcs/ft	24 V	132 °	32'	10 mm
K-NF-YELLOW-0768-24V-15M	IP 67	2.34 W/ft	Yellow 	96 lm/ft	34 pcs/ft	24 V	132 °	49'	10 mm



ACCESSORIES




Ref. 69001 End cap with hole for K-NF-0768-24V series



Ref. 69002 End cap for K-NF-0768-24V series



Ref. 69003 Plastic mounting clip for K-NF-0768-24V series



Ref. 69005 Aluminum track (1.38" / 3.5cm) for K-NF-0768-24V series, includes metal mounting clip