










- Clean line of light
- Only 3mm tall
- Narrow, 6 mm wide
- Super short cutting sections

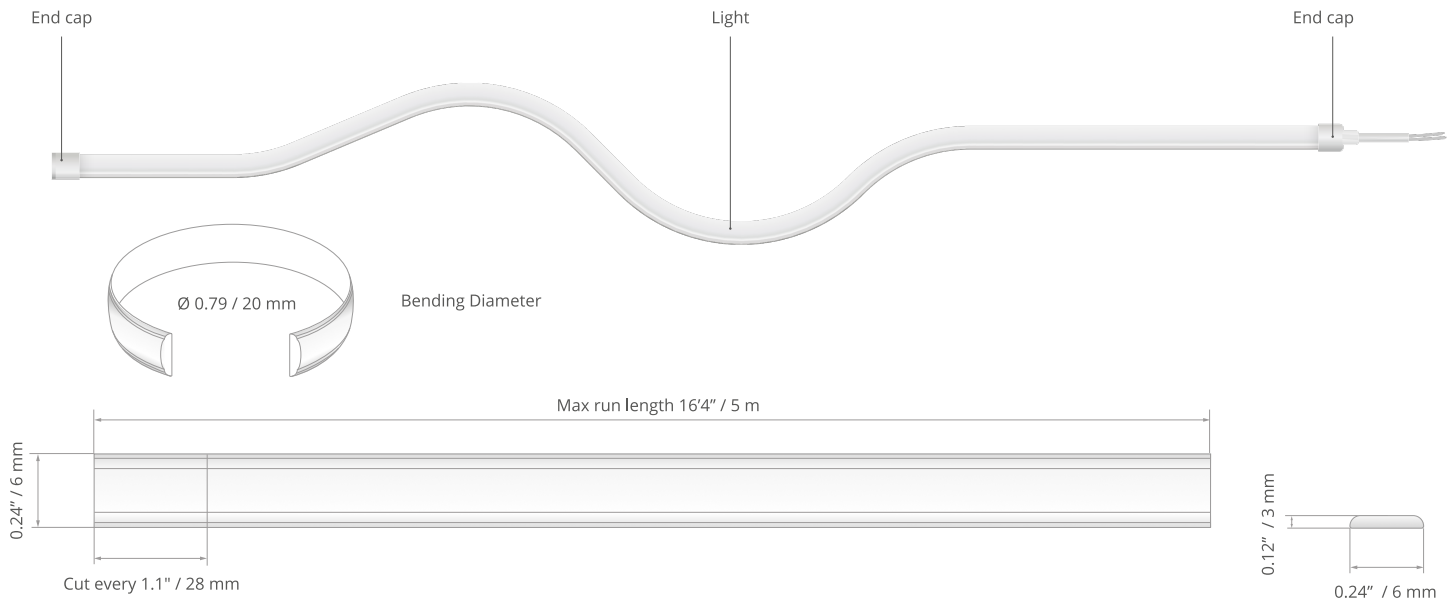


* Custom lengths must be made by the factory to maintain the UL listing

TECHNICAL DATA


Model	IP protection	Power consumption	Color temperature	Lumen output	Diode QTY per foot	Input voltage	Beam Angle	Max run length	LED width
K-NFM-22-0720-24V-5M	IP 65	2.2 W/ft	2200 K 	161 lm/ft	102 pcs/ft	24 V	120 °	16'4"	6 mm
K-NFM-25-0720-24V-5M	IP 65	2.2 W/ft	2500 K 	174 lm/ft	102 pcs/ft	24 V	120 °	16'4"	6 mm
K-NFM-27-0720-24V-5M	IP 65	2.2 W/ft	2700 K 	180 lm/ft	102 pcs/ft	24 V	120 °	16'4"	6 mm
K-NFM-30-0720-24V-5M	IP 65	2.2 W/ft	3000 K 	168 lm/ft	102 pcs/ft	24 V	120 °	16'4"	6 mm
K-NFM-35-0720-24V-5M	IP 65	2.2 W/ft	3500 K 	198 lm/ft	102 pcs/ft	24 V	120 °	16'4"	6 mm
K-NFM-40-0720-24V-5M	IP 65	2.2 W/ft	4000 K 	193 lm/ft	102 pcs/ft	24 V	120 °	16'4"	6 mm
K-NFM-50-0720-24V-5M	IP 65	2.2 W/ft	5000 K 	207 lm/ft	102 pcs/ft	24 V	120 °	16'4"	6 mm



ACCESSORIES

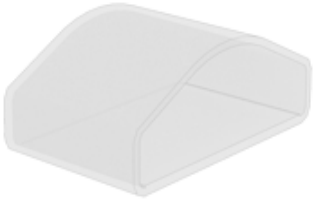

Ref. 69043 End cap for K-NFM-0720-24V series

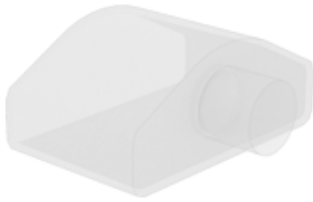

Ref. 69044 End cap with hole for K-NFM-0720-24V series