


- UL Listed
- CRI 90+
- 2-Step MacAdam's ellipse, single binning
- L70- Over 50,000 hours
- R9 up to 81
- Reverse voltage protection
- Minimum 2oz copper PCB



**TECHNICAL DATA**

Model	IP protection	Power consumption	Color temperature	Lumen output	Diode QTY per foot	Input voltage	Beam Angle	Max run length	LED width
WP-K-22-0530-HD-IP65-24V GEL	IP 65 (gel coated)	1.6 W/ft	2200 K	81 lm/ft	81 pcs/ft	24 V	120 °	24'	10 mm
WP-K-25-0530-HD-IP65-24V GEL	IP 65 (gel coated)	1.6 W/ft	2500 K	89 lm/ft	81 pcs/ft	24 V	120 °	24'	10 mm
WP-K-27-0530-HD-IP65-24V GEL	IP 65 (gel coated)	1.6 W/ft	2700 K	127 lm/ft	81 pcs/ft	24 V	120 °	24'	10 mm
WP-K-30-0530-HD-IP65-24V GEL	IP 65 (gel coated)	1.6 W/ft	3000 K	138 lm/ft	81 pcs/ft	24 V	120 °	24'	10 mm
WP-K-35-0530-HD-IP65-24V GEL	IP 65 (gel coated)	1.6 W/ft	3500 K	143 lm/ft	81 pcs/ft	24 V	120 °	24'	10 mm
WP-K-40-0530-HD-IP65-24V GEL	IP 65 (gel coated)	1.6 W/ft	4000 K	143 lm/ft	81 pcs/ft	24 V	120 °	24'	10 mm
WP-K-50-0530-HD-IP65-24V GEL	IP 65 (gel coated)	1.6 W/ft	5000 K	152 lm/ft	81 pcs/ft	24 V	120 °	24'	10 mm

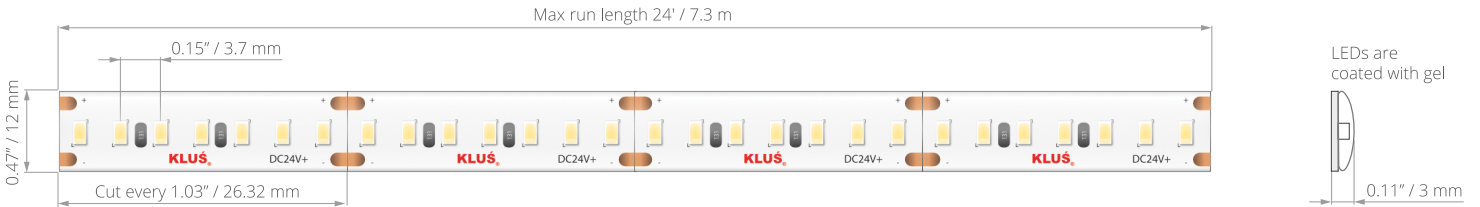

**WIRE OPTIONS**

36"-72" wire leads (20 gauge jacketed wire)

