

MD-SERIES MAGNETIC DIMMABLE CLASS 2 LED DRIVER



P/N: MD-60-24




KLUS - MD-60-24 is the most compact LED driver on the market with a magnetic transformer core. It is equipped with two auto-reset breakers, one on the input and one on the output, which protect both the load and driver. The driver is encased in a coated metal box that includes 2 knock-outs, one on each side, to enable easy installation that complies with electrical code requirements.

QUICK SPECS

Input Voltage	Max Output Power	Output Voltage	Output Current	Efficiency @ Max Load	Power Factor @ Max. Load	Envir. Protection Rating	Weight
120VAC	60W	24VDC	2.56 A	> 85%	> 0.82	NEMA 3R	50oz

WIRING DIAGRAM




ENCLOSURE DETAILS In. (mm)

Length	6.62 (168)
Width	2.58 (65.6)
Height	2.33 (59.1)

FEATURES

• Dimmable with any standard MLV/Incandescent TRIAC- (Leading edge) dimmer switch

- Dual protection primary and secondary auto-reset circuit breakers
- Nema 3R Outdoor Use
- Two knock-outs one on each side
- Class 2
- ETL Listed
- Certified to CSA Standard





2.58"


MD-SERIES MAGNETIC DIMMABLE CLASS 2 LED DRIVER


SPECIFICATIONS


Input	
Input Voltage	120VAC
Input Current @ Max Load	0.95A
Power Factor	0.82
Efficiency	> 85%
Output	
Max Load	60W
Output Voltage	23.3VDC
Output Current @ Max Load	2.56A
Open Circuit Output Voltage	25VDC
Coil Former	Double Section Bobbin
Envrionmental	
Operating Temperature	-30°c - 45°c (-22°F - 113°F)
Min Installation space between drivers	5″ Inch
Thermal Class	B130°c
Protections	
Cinercit Deserve	
Circuit Breaker	Primary and secondary auto-reset
Mechanical & Housing	Primary and secondary auto-reset
	Primary and secondary auto-reset PVC 600V #20
Mechanical & Housing	
Mechanical & Housing Leads Primary	PVC 600V #20
Mechanical & Housing Leads Primary Leads Secondary	PVC 600V #20 PVC 300V #14
Mechanical & Housing Leads Primary Leads Secondary Length	PVC 600V #20 PVC 300V #14 6.62" (168mm)
Mechanical & Housing Leads Primary Leads Secondary Length Width	PVC 600V #20 PVC 300V #14 6.62" (168mm) 2.58" (65.6mm)
Mechanical & Housing Leads Primary Leads Secondary Length Width Height	PVC 600V #20 PVC 300V #14 6.62" (168mm) 2.58" (65.6mm) 2.33" (59.1mm)
Mechanical & Housing Leads Primary Leads Secondary Length Width Height Weight	PVC 600V #20 PVC 300V #14 6.62" (168mm) 2.58" (65.6mm) 2.33" (59.1mm) 9oz (255grams)
Mechanical & HousingLeads PrimaryLeads SecondaryLengthWidthHeightWeightHousing Material	PVC 600V #20 PVC 300V #14 6.62" (168mm) 2.58" (65.6mm) 2.33" (59.1mm) 9oz (255grams) Coated metal
Mechanical & HousingLeads PrimaryLeads SecondaryLengthWidthHeightWeightHousing MaterialHousing Color	PVC 600V #20 PVC 300V #14 6.62" (168mm) 2.58" (65.6mm) 2.33" (59.1mm) 9oz (255grams) Coated metal Black
Mechanical & HousingLeads PrimaryLeads SecondaryLengthWidthHeightWeightHousing MaterialHousing ColorJunction Box	PVC 600V #20 PVC 300V #14 6.62" (168mm) 2.58" (65.6mm) 2.33" (59.1mm) 9oz (255grams) Coated metal Black Yes

MD-SERIES MAGNETIC DIMMABLE CLASS 2 LED DRIVER


MECHANICAL DIAGRAM

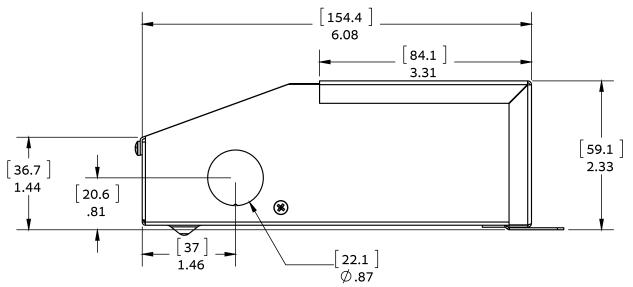

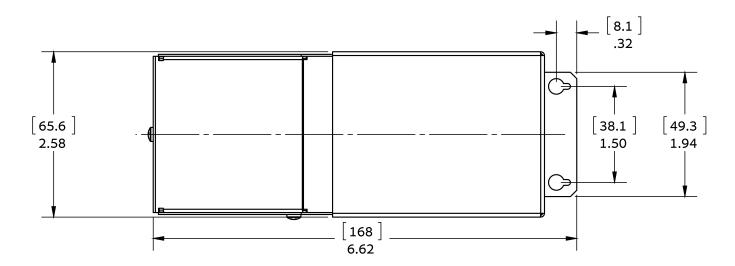



MD-SERIES MAGNETIC DIMMABLE CLASS 2 LED DRIVER

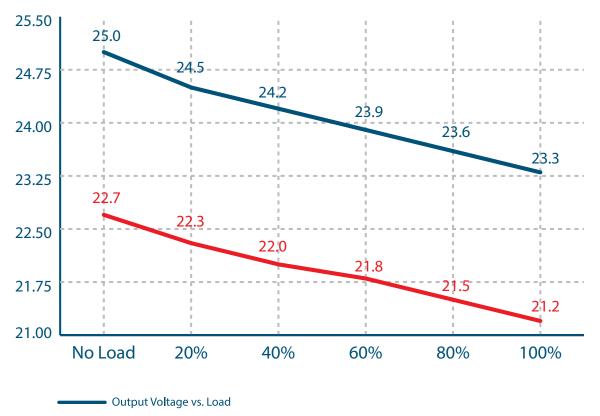

Output Voltage With a Typical Dimmer



www.KlusDesign.com

Vero Beach, FL 32962 / United States / Customer Service: sophia@klusdesign.com / (Ph.) 772 321 2260, 772 569 6655

We reserve the right to change and modify our products