

MODULE MI-WAVE-04 REF: 45025

PRODUCT DESCRIPTION

- Module for building shapes MI-WAVE in the MIFOR-70 system
- Also applicable as a standalone lighting fixture
- Includes a light source

TECHNICAL SPECIFICATION

Application

- main and decorative lighting,
- construction of lighting installations with flowing shapes.


Mounting


- suspended, using dedicated accessories.

Additional information

- mounting type - suspended
- place of installation - ceiling
- luminous flux (lm) - 2502
- maximum luminous efficacy (lm/W) - 46,8
- closest color temperature (K) - 4000
- color rendering index (Ra) - 90
- average rated life (h)- 26000
- standard deviation of color matching SDCM - 3
- fixture color - silver anodized
- input voltage (V) - 12 V DC
- max load (W) - 53
- wired control - on/off
- protection rating - IP20
- protection class - III
- diffuser material - PC
- housing material: aluminum
- admissible ambient temperature range - 10°C-30°C
- weight - 3,3 kg
- suspension wires and fasteners are not included

DIMENSIONS:

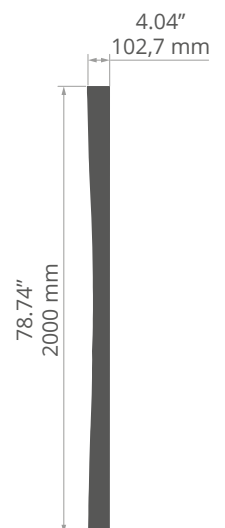

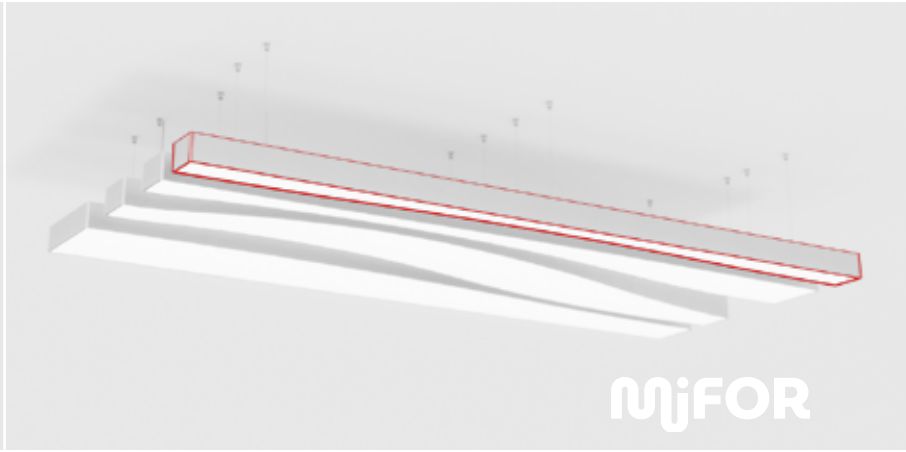

MODULE MI-WAVE-04
REF: 45025

FILL IN THE BLANK FIELDS

Product No.	
Binding type	
Company	
Job name	
Date	

RELATED PRODUCTS



Module
MI-WAVE-01
REF: 45022



Module
MI-WAVE-02
REF: 45023



Module
MI-WAVE-03
REF: 45024