

- CRI 90+
- UL listed
- 2-Step MacAdam's ellipse, single binning
- Only to use with: PIKO, PIKO-ZM extrusions
- L70- Over 50,000 hours
- R9 up to 81
- Reverse voltage protection
- Minimum 2oz copper PCB







**TECHNICAL DATA**


Model	IP protection	Power consumption	Color temperature	Lumen output	Diode QTY per foot	Input voltage	Beam Angle	Max run length	LED width
5K-WP-K-22-1091-24V	IP 65 (silicon sleeve)	2.84 W/ft	2200 K	209 lm/ft	59 pcs/ft	24 V	120 °	9'8"	7 mm
5K-WP-K-25-1091-24V	IP 65 (silicon sleeve)	2.84 W/ft	2500 K	224 lm/ft	59 pcs/ft	24 V	120 °	9'8"	7 mm
5K-WP-K-27-1091-24V	IP 65 (silicon sleeve)	2.84 W/ft	2700 K	250 lm/ft	59 pcs/ft	24 V	120 °	9'8"	7 mm
5K-WP-K-30-1091-24V	IP 65 (silicon sleeve)	2.84 W/ft	3000 K	261 lm/ft	59 pcs/ft	24 V	120 °	9'8"	7 mm
5K-WP-K-35-1091-24V	IP 65 (silicon sleeve)	2.84 W/ft	3500 K	272 lm/ft	59 pcs/ft	24 V	120 °	9'8"	7 mm
5K-WP-K-40-1091-24V	IP 65 (silicon sleeve)	2.84 W/ft	4000 K	280 lm/ft	59 pcs/ft	24 V	120 °	9'8"	7 mm
5K-WP-K-50-1091-24V	IP 65 (silicon sleeve)	2.84 W/ft	5000 K	279 lm/ft	59 pcs/ft	24 V	120 °	9'8"	7 mm

**WIRE OPTIONS**


36"-72" wire leads (20 gauge Jacketed wire)

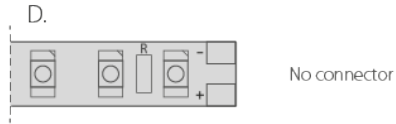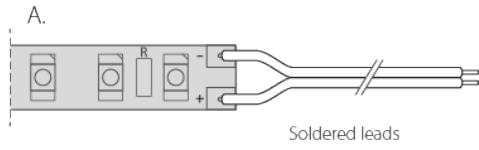

RELATED EXTRUSIONS



PIKO Extrusion  
Ref:  
B8288ANODA



PIKO-ZM  
Extrusion  
Ref: C1168