


- CRI 90+
- 2-Step MacAdam's ellipse, single binning




**TECHNICAL DATA**

Model	Chip	IP protection	Power consumption	Color temperature	Lumen output	Diode QTY per foot	Input voltage	Beam Angle	Max run length	LED width
K-22-0530-HD-24V	Epistar 2110	IP 20	1.6 W/ft	2200 K	92 lm/ft	81 pcs/ft	24 V	120 °	24'	10 mm
K-25-0530-HD-24V	Epistar 2110	IP 20	1.6 W/ft	2500 K	99 lm/ft	81 pcs/ft	24 V	120 °	24'	10 mm
K-27-0530-HD-24V	Epistar 2110	IP 20	1.6 W/ft	2700 k	142 lm/ft	81 pcs/ft	24 V	120 °	24'	10 mm
K-30-0530-HD-24V	Epistar 2110	IP 20	1.6 W/ft	3000 K	155 lm/ft	81 pcs/ft	24 V	120 °	24'	10 mm
K-35-0530-HD-24V	Epistar 2110	IP 20	1.6 W/ft	3500 K	160 lm/ft	81 pcs/ft	24 V	120 °	24'	10 mm
K-40-0530-HD-24V	Epistar 2110	IP 20	1.6 W/ft	4000 K	160 lm/ft	81 pcs/ft	24 V	120 °	24'	10 mm
K-50-0530-HD-24V	Epistar 2110	IP 20	1.6 W/ft	5000 K	170 lm/ft	81 pcs/ft	24 V	120 °	24'	10 mm

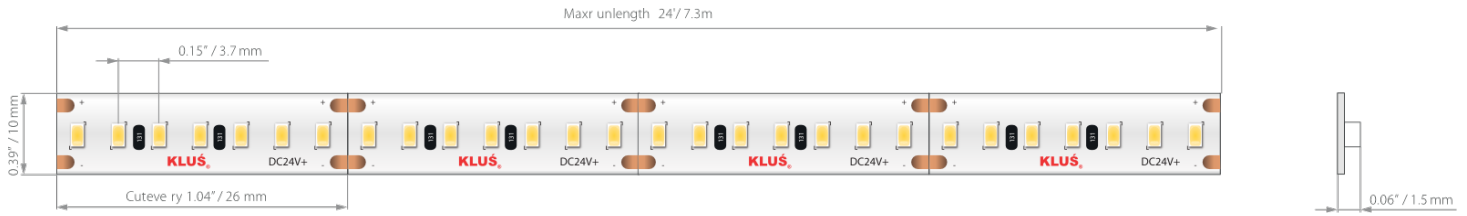

**WIRE OPTIONS**


36"-72" wire leads (20 gauge Jacketed wire)

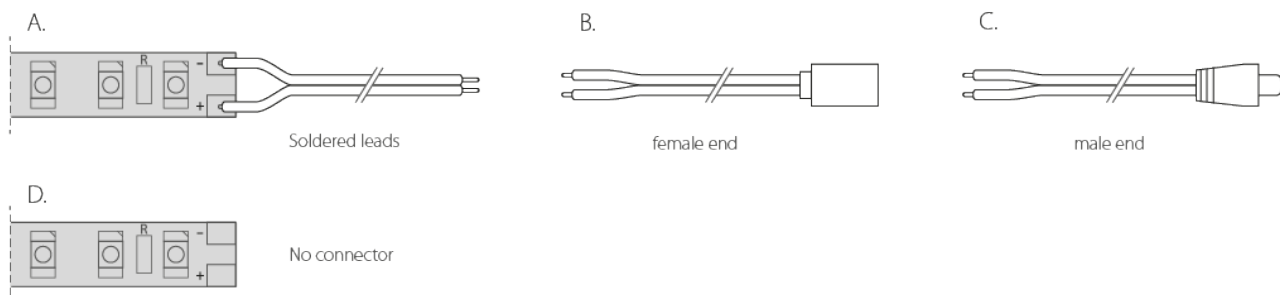

RELATED EXTRUSIONS



PDS-4-PLUS  
Extrusion  
Ref: C1263



SILER Extrusion  
Ref:  
B9325ANODA