




- CRI 90+
- 2-Step MacAdam's ellipse, single binning
- L70- Over 50,000 hours
- R9 up to 81
- Reverse voltage protection
- Minimum 2oz copper PCB

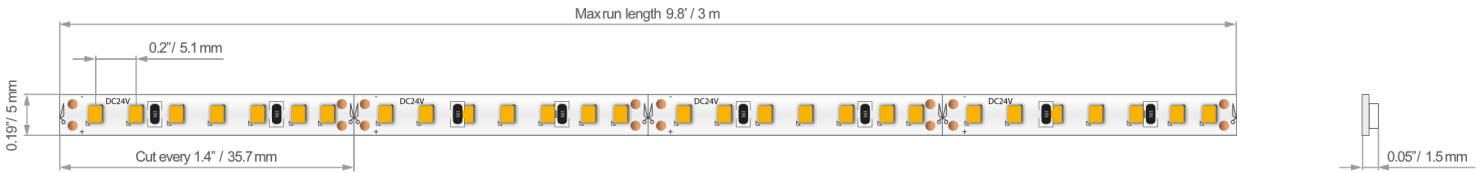


## TECHNICAL DATA

Model	IP protection	Power consumption	Color temperature	Lumen output	Diode QTY per foot	Input voltage	Beam Angle	Max run length	LED width
K-22-1091-24V	IP 20	2.84 W/ft	2200 K	232 lm/ft	59 pcs/ft	24 V	120 °	9'8"	5 mm
K-25-1091-24V	IP 20	2.84 W/ft	2500 K	249 lm/ft	59 pcs/ft	24 V	120 °	9'8"	5 mm
K-27-1091-24V	IP 20	2.84 W/ft	2700 K	277 lm/ft	59 pcs/ft	24 V	120 °	9'8"	5 mm
K-30-1091-24V	IP 20	2.84 W/ft	3000 K	289 lm/ft	59 pcs/ft	24 V	120 °	9'8"	5 mm
K-35-1091-24V	IP 20	2.84 W/ft	3500 K	302 lm/ft	59 pcs/ft	24 V	120 °	9'8"	5 mm
K-40-1091-24V	IP 20	2.84 W/ft	4000 K	311 lm/ft	59 pcs/ft	24 V	120 °	9'8"	5 mm
K-50-1091-24V	IP 20	2.84 W/ft	5000 K	310 lm/ft	59 pcs/ft	24 V	120 °	9'8"	5 mm



## WIRE OPTIONS


36"-72" wire leads (20 gauge Jacketed wire)

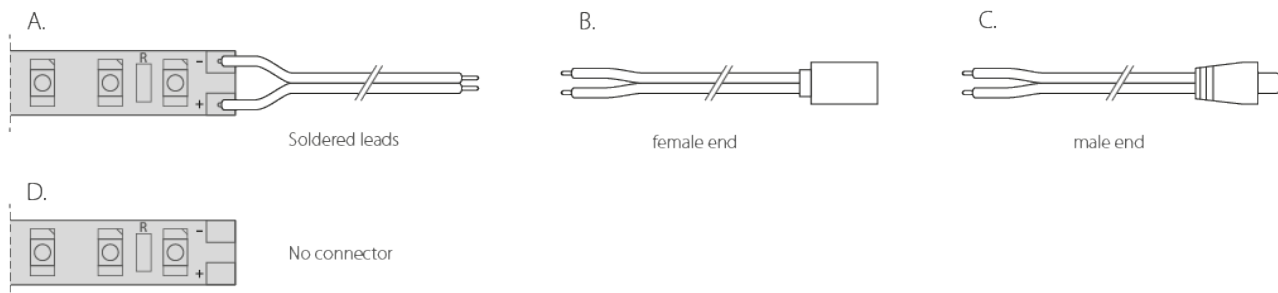


RELATED EXTRUSIONS




LINO Extrusion  
Ref:  
B8287ANODA



PIKO Extrusion  
Ref:  
B8288ANODA



PIKO-O Extrusion  
Ref: C1167



PIKO-ZM  
Extrusion  
Ref: C1168