


WP-K-1530-RGB+W-24V FLEXIBLE LED STRIP DATA SHEET

- UL Listed
- 3-Step MacAdam's ellipse, single binning
- L70- Over 40,000 hours
- Reverse voltage protection
- Minimum 3oz copper PCB







TECHNICAL DATA

| Model | IP protection | Power consumption | Color temperature | Lumen output | Diode QTY per foot | Input voltage | Beam Angle | Max run length | LED width |
|---------------------|---------------------------|-------------------|-----------------------|-----------------------|-----------------------|------------------|---------------|-------------------|--------------|
| WP-K-1530-RGB+W-24V | IP 65 (silicon sleeve) | 4.6 W/ft | 3000 K Blue Green Red | 94 lm/ft 123 lm/ft | 115 pcs/ft | 24 V | 120° | 19'2" | 12 mm |




















WIRE OPTIONS

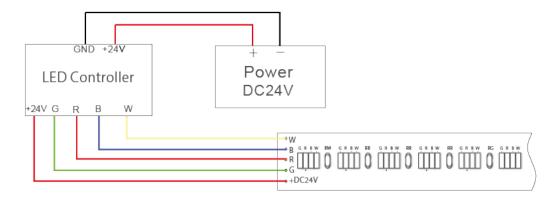



RELATED EXTRUSIONS



4050 Extrusion Ref: 18050



DES Extrusion Ref: 18030ANODA



GIZA Extrusion Ref: B5556ANODA



GIZA-DUO-LL Extrusion Ref: C2162



IDOL Extrusion Ref: 18014ANODA



IKON Extrusion Ref: 18013ANODA



IMET Extrusion Ref: 18012ANODA



INTER Extrusion Ref: 18011ANODA



JAZ Extrusion Ref: B8547ANODA



KIDES Extrusion Ref: 18031ANODA



KIDES-DUO Extrusion Ref: 18032ANODA



KOPRO-30 Extrusion Ref: B7890ANODA



KOZEL Extrusion Ref: B6454



KOZUS Extrusion Ref: B7823NA



LARKO Extrusion Ref: B5552ANODA



LESTO Extrusion Ref: B5551ANODA




LIPOD Extrusion Ref: B5554ANODA



LOC-30 Extrusion Ref: 18015ANODA




LOKOM Extrusion Ref: B5553ANODA



MOD-100 Extrusion Ref: 18049



MOD-50 Extrusion Ref: 18047



OPAC-30 Extrusion Ref: B6164ANODA




SEKODU Extrusion Ref: B6597ANODA



SEKOMA Extrusion Ref: B6595ANODA



SEPOD Extrusion Ref: B6593ANODA



SILER Extrusion Ref: B9325ANODA



STEPUS Extrusion Ref: 18038ANODA